

Panasonic



FULL-COLOR
WIDE
SERIES
Refina

BS-TYPE

Black Color

Luxurious Lifestyle

تصميم فاخر

Design and lineup that perfectly match lifestyle interiors and creating attractive living spaces.

تصميم يتماشى مع التصميمات الداخلية لنمط حياتك، ويضيف لمسةً من الجاذبية على مساحات العيش لديك.



CREATE LUXURIOUS STYLISH & SMART DESIGN

أناقة الأسلوب بتصميم ذكي

An elegant Black colour tone created to enrich all living spaces.

درجات فاخرة وجذابة من اللون الأسود تُضفي لمسة من الجمال على جميع مساحات العيش عندك.



HIGH HEAT RESISTANT EASY TO USE SWITCH MECHANISM

أحدث آلية تبديل مقاومة للحرارة وسهلة الاستخدام

Advanced combination of high-conductivity Heat-resistant copper, coil spring and outstanding resistant. Silver alloy contacts.

مزيج متقدم من النحاس ذي درجة التوصيل العالية والمقاوم للحرارة، مع زنبرك لولبي وأقطاب توصيل من الفضة عالية المقاومة.



HIGHLY RELIABLE SAFETY FEATURES

مميزات موثوقة وعالية الامان

Compliance on SASO Quality Marking & EQM and GCC. European RoHS directive compliant, Completely free from Cd, Hg, Cr6+, Pb, PBBs, PBDEs.

متوافقة مع علامة الجودة السعودية وإدارة الجودة البيئية (EQM) ومجلس التعاون الخليجي (GCC). كما أنها متوافقة مع التوجيه الصادر عن الاتحاد الأوروبي بشأن الحد من المواد الخطرة (RoHS)، وهي خالية تمامًا من مواد الكاديوم (Cd)، والرصاص (Pb)، والزرنيخ (Hg)، والكروم سداسي التكافؤ المنخفض (Cr6+)، والرصاص (Pb)، وثنائي الفينيل المتعدد البروم (PBBs)، وإثيرات ثنائي الفينيل المتعدد البروم (PBDEs).



علامة الجودة الإماراتية
Emirates Quality Mark

NB-0003



Switches المفاتيح

● **WEBP515117EB**

1-Gang, 1-Device 1Way Switch
16AX 250V with plate, Black



● **WEBP525217EB**

1-Gang, 2-Devices 1Way Switch,
16AX 250V with plate, Black



● **WEBP535317EBK**

1-Gang, 3-Devices 1Way Switch
16AX 250V with plate, Black



● **WEBP515127EB**

1-Gang, 1-Device 2Way Switch,
16AX 250V with plate, Black



● **WEBP525227EB**

1-Gang, 2-Devices 2Way Switch,
16AX 250V with plate, Black



● **WEBP535327EBK**

1-Gang, 3-Devices 2Way Switch
16AX 250V with plate, Black



● **WEBP545227EB**

1-Gang, 4-Devices 2Way Switch
16AX 250V with plate, Black



● **WEBP5113650EB**

1-Gang, 1-Device 1Way push button,
10AX 250V with plate, Black



● **WEBP5214730EB**

1-Gang, 1-Device 2Way
Switch 20A with plate, Black



● **WEBP5414600EB**

1-Gang, 1-Device 20A
DP Switch with NEON indicator with
plate, Black



● **WEBP5414620EB**

1-Gang, 1-Device 20A
DP Switch with NEON indicator with
plate, Black



● **WEBP5513630EB**

1-Gang, 1-Device 4Way Intermediate
Switch with plate, Black



● **WEBP52832EB**

Shutter switch with plate, Black



● **WNBP5428690EBK**

1-Gang, 45A DP Switch with indicator
with plate, Black



● **WNBP5448690EBK**

2-Gang, 45A DP Switch with indicator
with plate, Black



Socket Outlets مقابس

● **WEB11119EB**

13A 250V 1-Gang DP-Switched socket outlet with plate, Black



● **WEB11129EB**

13A 250V 2-Gang DP-Switched socket outlet with plate, Black



● **WEB1131EBK**

15A 250V 1-Gang Switched round pin outlet with plate, Black



● **WEBP13117EB**

13A 250V 1-Gang without switch, socket outlet with plate, Black



● **WEB11169EB**

Cooker control unit with plate, Black



● **WEB7010EB**

Cable outlet with 20A Terminal block, Black



● **WEB7020EB**

Cable outlet with 45A Terminal block, Black



● **WEB11113EB** ★

SOCKET 1G with USB Charger A+C, Black



Coming soon

● **WEB11123EB** ★

SOCKET 2G with USB Charger A+C, Black



Coming soon

● **WEB11114EB** ★

Socket outlet 1-Gang, DP switched with 1 port USB charger, Black



Coming soon

● **WEB11159EB**

Socket outlet 1-Gang, DP Switched with 2 Port USB charger, Black



Plates غطاء

● **WZB7891EB**

1-Touch plate for BS type 1-Gang cover, Black



● **WZB7892EB**

1-Touch plate for BS type 2-Gang cover, Black



Accessories اكسسورات

● **WEBP4519940EB**

Telephone socket 6P4C, with plate (Black)



● **WEBP4519680EB**

Data socket, CAT 6, with plate (Black)



● **WEBP4529680EB**

Data socket, CAT 6, 1-Gang, 2-Devices with plate (Black)



● **WEBP4529682EB**

Data socket, CAT 6 and telephone socket 6P4C with plate (Black)



● **WEBP47164501EB**

Oblique angled F Type television terminal with plate (Black)



● **WEBP4719830EB**

DIN Type television terminal with plate (Black)



● **WEBP4726442EB**

Oblique angled F Type television terminal and telephone socket 6P4C, with plate (Black)



● **WEBP47266871EB**

F Type television terminal and CAT 6 data modular jack with plate (Black)



● **WEBP5781530EB**

Dimmer switch, (Incandescent and low voltage halogen with transformer 12V light control), 500W, with plate (Black)



● **WEBP579120EB**

LED-Dimmer switch 200W (LED 50W) with plate (Black)



● **WEBP579150EB**


LED-Dimmer switch 200W with plate, Minimum brightness adjustment (Black)




الأبعاد Dimensions

المفاتيح Switches


WEBP515117EB




WEBP525217EB




WEBP535317EBK




WEBP515127EB




WEBP525227EB




WEBP535327EBK




WEBP545227EB




WEBP5113650EB




WEBP5214730EB




WEBP5414600EB




WEBP5414620EB




WEBP5513630EB




WEBP52832EB



WNBP5428690EBK




WNBP5448690EBK

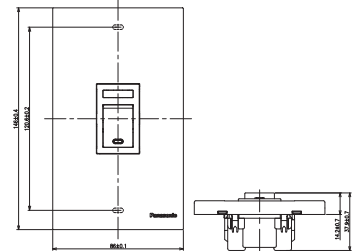


الأبعاد Dimensions

Socket Outlets مقابس


WEB11119EB




WEB11129EB




WEB1131EBK




WEBP13117EB




WEB11169EB




WEB7010EB




WEB7020EB




WEB11113EB




WEB11123EB




WEB11114EB




WEB11159EB



WZB7891EB




WZB7892EB




الأبعاد Dimensions

اكسسورات Accessories


WEBP4519940EB




WEBP4519680EB




WEBP4529680EB




WEBP4529682EB




WEBP47164501EB




WEBP4719830EB




WEBP4726442EB




WEBP47266871EB




WEBP5781530EB



WEBP579120EB



WEBP579150EB



تفاصيل تقنية

TECHNICAL DETAILS

مفتاح 16 امبير Switches 16AX

1 Way Switch



WEBP515117EB



WEBP525217EB



WEBP535317EBK

2 Way Switch



WEBP515127EB



WEBP525227EB



WEBP535327EBK

المواصفات التقنية Technical Specifications

- **Standards** Comply with IEC60669-1
- **Rating** 16AX 250V ~
- **Ambient Temperature** -10°C – +40°C
- **Representative Performance**
 - Electric strength : 2,000V 1 min
 - Operation test : 40,000 Operations
 - Temperature rise : Test current 20A [2.5 mm²]
Not more than 45K [Terminals]
- **Terminal** Pillar Terminal II
- **Applicable Wire** 1.5 mm² – 4 mm²
15 AWG – 12 AWG
- **Terminal Capacity** 1.5 mm² x 3, 2.5 mm² x 2, 4 mm² x 1

مفتاح رباعي 4-Devices Switch

المواصفات التقنية Technical Specifications

2 Way Switch



WEBP545227EB

- **Standards** Comply with IEC60669-1
- **Rating** 10AX 250V ~
- **Ambient Temperature** -10°C – +40°C
- **Representative Performance**
 - Electric strength : 2,000V 1 min
 - Operation test : 40,000 Operations
 - Temperature rise : Test current 20A [2.5 mm²]
Not more than 45K [Terminals]
- **Terminal** Screw Terminal
- **Applicable Wire** 1.0 mm² – 2.5 mm²
- **Terminal Capacity** 1.5 mm² x 1, 3.5 mm² x 1, 14 AWG x 1, 12 AWG x 1

تفاصيل تقنية

TECHNICAL DETAILS

Push Button مفتاح جرس



WEBP5113650EB

Technical Specifications المواصفات التقنية

● Standards	Comply with IEC60669-1
● Rating	10A 250V ~
● Ambient Temperature	-10°C – +40°C
● Representative Performance	· Electric strength : 2,000V 1 min · Operation test : 40,000 Operations · Temperature rise : Test current 13.5A [2.5 mm ²] Not more than 45K [Terminals]
● Terminal	Screw Terminal
● Applicable Wire	1 mm ² – 2.5 mm ²
● Terminal Capacity	1 mm ² x 1 1.5 mm ² x 1 2.5 mm ² x 1

*Supply terminal has 2 terminal holes.

Switch 20A مفتاح كهربى 20 أمبير

2 Way Switch



WEBP5214730EB

Technical Specifications المواصفات التقنية

● Standards	Comply with IEC60669-1
● Rating	20AX 250V ~
● Ambient Temperature	-10°C – +40°C
● Representative Performance	· Electric strength : 2,000V 1 min · Operation test : 10,000 Operations · Temperature rise : Test current 25A [4 mm ²] Not more than 45K [Terminals]
● Terminal	Pillar Terminal II
● Applicable Wire	1.5 mm ² - 4 mm ² 15 AWG - 12 AWG
● Terminal Capacity	1.5 mm ² x 3 2.5 mm ² x 2 4 mm ² x 1

تفاصيل تقنية

TECHNICAL DETAILS

مفتاح كهربائي 20 أمبير Switch 20A

DP switch with indicator



WEBP5414600EB

المواصفات التقنية Technical Specifications

● Standards	Comply with IEC60669-1
● Rating	20A 250V ~
● Ambient Temperature	-10°C – +40°C
● Representative Performance	· Electric strength : 2,000V 1 min · Operation test : Switch : 10,000 Operations · Temperature rise : Test current 25A [4 mm ²] Not more than 45K [Terminals]
● Terminal	Pillar Terminal II
● Applicable Wire	2.5 mm ² – 6 mm ² 13 AWG – 10 AWG
● Terminal Capacity	2.5 mm ² x 2 4 mm ² x 1 6 mm ² x 1

DP Switch 20A with twin Earth Terminal

مفتاح ثنائي القطب بقدرة 20 أمبير مع ارضي ثنائي



WEBP5414620EB

المواصفات التقنية Technical Specifications

● Standards	Comply with IEC60669-1
● Rating	20A 250V ~
● Ambient temperature	-10°C – +40°C
● Representative Performance	· Electric strength : 2,000V 1 min · Operation test : 10,000 Operations · Temperature rise : Test current 25A [4 mm ²] Not more than 45K [Terminals]
● Terminal	Pillar Terminal II
● Applicable Wire	2.5 mm ² – 6 mm ² 13 AWG – 10 AWG
● Terminal Capacity	2.5 mm ² x 2 4 mm ² x 1 6 mm ² x 1

تفاصيل تقنية TECHNICAL DETAILS

Intermediate Switch 4 Way مفتاح وسط سلم رباعي الاتجاه



WEBP5513630EB

Technical Specifications المواصفات التقنية

● Standards	Comply with IEC60669-1
● Rating	16AX 250V ~
● Ambient Temperature	-10°C – +40°C
● Representative Performance	· Electric strength : 2,000V 1 min · Operation test : 10,000 Operations · Temperature rise : Test current 25A [4 mm ²] Not more than 45K [Terminals]
● Terminal	Screw less terminal (Quick connect)
● Applicable Wire	1.5 mm ² - 4 mm ² 15 AWG - 12 AWG Only Rigid (Solid/Stranded) copper conductor type
● Terminal Capacity	1 x 1.5 mm ² 1 x 4 mm ²

Shutter Switch مفتاح غالق



WEBP52832EB

Technical Specifications المواصفات التقنية

● Rating	10A 250V ~
● Applicable Wire	Solid copper wire : 1.38 mm [1.5 mm ²], 1.78 mm [2.5 mm ²], 1.6 mm, 2 mm diameter Stranded copper wire : 1.5 mm ² , 2 mm ² , 2.5 mm ² , 3.5 mm ²
● Ambient temperature range	-10°C to 40°C
● Place for use	Indoor only

Switch 45A مفتاح كهربى 45 أمبير



WNBP5428690EBK



WNBP5448690EBK

Technical Specifications المواصفات التقنية

● Standards	Comply BS EN 60669-1
● Rating	45A 250V ~ [Resistive] Motor Full load current of 25A or less, power factor of 0.8 or more]
● Ambient Temperature	-10°C – +40°C
● Representative Performance	· Electric strength : 1,500V 1 min · Operation test : 10,000 Operations · Temperature rise : Test current 51A [16 mm ²] Not more than 45K [Terminals]
● Terminal	Pillar Terminal
● Applicable Wire	[Solid] 4 mm ² , [Stranded] 4 mm ² – 16 mm ² , [AWG] AWG 10 – AWG 6
● Terminal Capacity	4 mm ² x 2, 6 mm ² x 2, 10 mm ² x 1, 16 mm ² x 1

تفاصيل تقنية

TECHNICAL DETAILS

13A 250V ~ Socket Outlets منافذ مقبس 13 أمبير 250 فولت



WEB11119EB



WEB11129EB

المواصفات التقنية Technical Specifications

● Standards	Comply with BS1363-2 and IEC60884-1
● Rating	13A 250V ~
● Ambient Temperature	-10°C – +40°C
● Representative Performance	· Electric strength : 2,000V 1 min · Operation test : 15,000 times [30,000 movements] · Temperature rise : Test current 20A [2.5 mm ²] Not more than 52K [Terminals]
● Terminal	Pillar Terminal II
● Applicable Wire	1.5 mm ² – 4 mm ² 15 AWG – 12 AWG
● Terminal Capacity	1.5 mm ² x 3 2.5 mm ² x 3 4 mm ² x 2

15A 3Pin Socket Outlets مقبس ثلاثي السنون 15 أمبير



WEB1131EBK

المواصفات التقنية Technical Specifications

● Standards	Comply with BS546
● Rating	15A 250V ~
● Ambient Temperature	-10°C – +40°C
● Representative Performance	· Electric strength : 1,500V 1 min · Operation test : 15,000 times [30,000 movements] · Temperature rise : Test current 15A [2.5 mm ²] Not more than 35K [Terminals]
● Terminal	Pillar terminal II
● Applicable Wire	2.5 mm ² – 4 mm ²
● Terminal Capacity	1.5 mm ² x 3 2.5 mm ² x 3 4 mm ² x 2

تفاصيل تقنية TECHNICAL DETAILS

مقبس 13 أمبير من دون مفتاح 13A Socket Outlet Without Switch



WEBP13117EB

المواصفات التقنية Technical Specifications

● Standards	Comply with BS1363-2 and IEC60884-1
● Rating	13A 250V ~
● Ambient Temperature	-10°C – +40°C
● Representative Performance	· Electric strength : 2,000V 1 min · Operation test : 15,000 times [30,000 movements] · Temperature rise : Test current 20A [2.5 mm ²] Not more than 52K [Terminals]
● Terminal	Pillar Terminal II
● Applicable Wire	1.5 mm ² – 4 mm ² 15 AWG – 12 AWG
● Terminal Capacity	1.5 mm ² x 3 2.5 mm ² x 3 4 mm ² x 2

وحدة التحكم في جهاز الطبخ Cooker Control Unit



WEB11169EB

المواصفات التقنية Technical Specifications

● Standards	Comply with Socket : BS 1362-2 and IEC60884-2-3 Switch : IEC60669-1
● Rating	Switch : 45A 250V ~ Socket Outlet : 13A 250V ~
● Ambient Temperature	-10°C – +40°C
● Representative Performance	· Electric strength : 1,500V 1 min · Operation test : Switch : 20,000 Operations Socket Outlet : 15,000 times [30,000 movements] · Temperature rise : Test current 51A [16 mm ²] Not more than 45K [Terminals]
● Terminal	Pillar terminal
● Applicable Wire	4 mm ² – 16 mm ² Stranded [AWG] AWG 10 – AWG 6

تفاصيل تقنية TECHNICAL DETAILS

20A Cable Outlet مخرج كابل 20 أمبير



WEB7010EB

المواصفات التقنية Technical Specifications

- **Standards and Approvals** Comply with BS5733
- **Ambient Temperature** -5°C – +40°C
- **Representative Performance**
 - Electric strength : 2,000V 1 min
 - Temperature rise :
WEB7010EB : Test current 22A [4 mm²]
- **Terminal** Pillar Terminal
- **Applicable Wire** WEB7010EB : Input/Output : 2.5 mm² – 6 mm²
(Rigid Copper Wire)
1.5 mm² – 2.5 mm²
(Flexible Electrical Wire)
- **Terminal Capacity** WEB7010EB : Input 2.5 mm², 4 mm², 6 mm², x 1
Output 1.5 mm², 2.5 mm², x 1

45A Cable Outlet مخرج كابل 45 أمبير



WEB7020EB

المواصفات التقنية Technical Specifications

- **Standards and Approvals** Comply with BS5733
- **Ambient Temperature** -5°C – +40°C
- **Representative Performance**
 - Electric strength : 2,000V 1 min
 - Temperature rise :
WEB7020EB : Test current 49.5A [6 mm²]
Not more than 47K [Terminals]
- **Terminal** Pillar Terminal
- **Applicable Wire** WEB7020EB : Input/Output : 6 mm² – 10 mm²
(Rigid Copper Wire)
4 mm² – 6 mm²
(Flexible Electrical Wire)
- **Terminal Capacity** WEB7020EB : Input 6 mm², 10 mm²
Output 4 mm², 6 mm²

تفاصيل تقنية TECHNICAL DETAILS

اكسسورات - هاتف Accessory - Telephone



WEBP4519940EB

المواصفات التقنية Technical Specifications

- **Connector Type** Miniature Modular Jack, 6 position with 4-contacts, specified in TIA-1096-A [Previously in FCC part 68]
- **Terminal** Quick Connect Terminal [Screwless Connection]
- **Applicable Wire** Paired quad-type PVC indoor cable :
Core wire to be 0.4 mm, 0.5 mm, 0.65 mm, in diameter [solid copper only]
2-pair Business-phone indoor cable :
Core wire to be 0.4 mm, 0.5 mm, 0.65 mm, in diameter [solid copper only]

اكسسورات - خط انترنت Accessory - LAN



WEBP4519680EB

المواصفات التقنية Technical Specifications

- **Connector Type** "8-way unshielded fixed connector [miniature 8-position modular jack]" specified in IEC60603-7
- **Terminal** IDC connection
- **Applicable Cable** WEG24886 : 4-pair UTP cable, Category 6
Conductor : solid copper wire, 24 AWG – 22 AWG [diameter : 0.5 mm – 0.65 mm]

اكسسورات - التلفاز Accessory - Television



WEBP47164501EB

المواصفات التقنية Technical Specifications

- **Connector Type [Outlet]** F type
- **Terminal** Screw Terminal
[Only coaxial core isn't screw terminal type]
- **Impedance Input/Outlet** 75Ω
- **Applicable Cable** Coaxial Cable Characteristic Impedance 75Ω type : S-5C-FB

تفاصيل تقنية TECHNICAL DETAILS

اكسسورات - التلفاز Accessory - Television



WEBP47193830EB

المواصفات التقنية Technical Specifications

- Connector Type [Outlet] DIN Type
- Terminal Screw Terminal Type
[Only coaxial core isn't screw terminal type]
- Impedance Input/Outlet 75Ω
- Applicable Cable Coaxial Cable Characteristic Impedance 75Ω type :
5C-2V, 3C-2V

المفاتيح الديمر Dimmer Switches



WEBP5781530EB



WEBP579120EB



WEBP579150EB

المواصفات التقنية Technical Specifications

- Rating 220V – 240V ~ 500W
- WEBP5781530EB
- Ambient Temperature 0°C – +35°C
 - Terminal Screw Terminal
 - Applicable Wire 1 mm² – 2.5 mm²
 - Rating 220V – 240V – 50/60Hz
 - LED 50W WEBP579120EB
 - LED 200W WEBP579150EB
 - Ambient Temperature 0°C – 35°C
 - Terminal Screw [WEBP579120EB]
Screw [WEBP579150EB]
 - Applicable Wire 1 mm² – 2.5 mm² [WEBP579120EB]
1 mm² – 4 mm² [WEBP579150EB]

Note

A series of horizontal dashed lines for writing notes.



Please Contact.....

Panasonic Marketing Middle East & Africa FZE

PO Box 17985, Jebel Ali, Dubai, UAE

Telephone : +971-4-886-2142 Facsimile : +971-4-886-2352

Toll Free No. : 800-7262

Customercare@ae.panasonic.com | www.panasonic.com

All Rights Reserved ©2023 COPYRIGHT Panasonic Marketing Middle East & Africa FZE

Full Color Wide Series Refina Black Color 03/23-0.9K