

Panasonic®

DP-1810P



- 18 ppm digital copier/printer
- Ledger size scanner
- Network printer capability
- Compact body and easy to use interface

WORKIO™
DIGITAL IMAGING SYSTEMS

DP-1810P Features

Digital PPC

- Auto Magnification Selection (with ADF option)
- Auto Paper Selection (with ADF option)
- Job Memory (2)
- Interrupt Mode
- Image Rotation (90 degrees)
- Electronic Sort
- Rotation Sort
- Sky Shot Mode
- Margin Mode
- Book Mode
- 2 Page Copy Mode
- 2 in 1 *1

Panasonic Document Management System*2

- Document Manager
- Document Scanner
- Document Viewer with Annotation function
- Configuration Editor
- Status Monitor

Printer

- Collation Stack
- N in 1 (2 in 1, 4 in 1)
- Network Printing *3
- Rotate Sort *4
- Image Overlay (Only for Windows® 98/Me)*4

Others

- Multi-Task Operation
- Self Diagnostic Function
- Power Save Modes
- Department Counter (50 departments)

Control Panel




Options


You can select a number of options that make the WORKiO DP-1810P a useful and versatile work center.

Function Enhancing Options

10/100 Ethernet Interface Kit	DA-NE200
PCL6 Emulation Kit	DA-PC210
Image Memory for Electronic Sort	DA-SM08B (8MB) DA-SM16B (16MB) DA-SM28B (128MB)
Key Counter Cable Kit	DA-KH200
Toner Bottle	DQ-TU10C

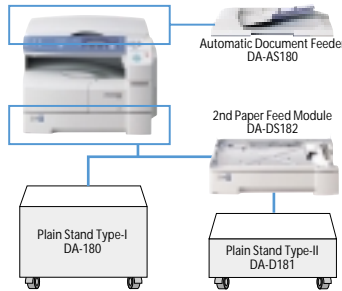

Dimensions

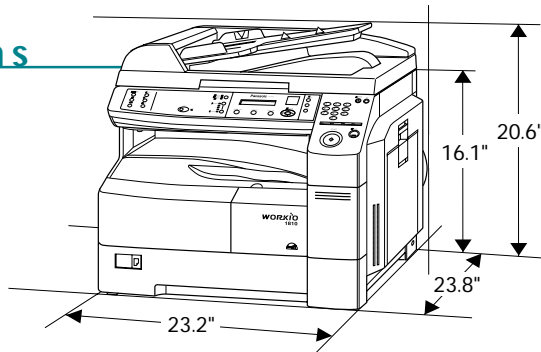

DP-1810P Specification

Basic / Digital PPC

Type	Desktop	
Copy / Print Process	Laser Electrostatic photographic method	
Developing Process	Dry type single component imaging	
Warm - up Time	Approx. 30 sec.	
First Copy Time	6.5 sec.	
Resolution	600 dpi	
Gray Scale	256 steps	
Multi Copy Speed	18 ppm	
Maximum Original Size	Ledger	
Copy Size	Ledger, Legal, Letter, Invoice	
Copy Ratio	Enlargement (fixed)	200%, 155%, 129%, 121%
	Reduction (fixed)	79%, 77%, 65%, 61%, 50%
Zoom (variable)	50~200%	
Automatic Document Feeder (Option)	50 sheets (Letter) / 30 sheets (Ledger, Legal)	
Paper Feed	550-sheet paper tray x 1 + 50-sheet bypass	
	Max. : 1,150 sheets with optional paper tray x 1	
Multiple Copy	999	
Exposure Controller	Text, Photo / Text / Photo	
Page Memory Capacity	16MB	
Sorting Memory Capacity	8MB	
Optional Memory	Base Memory plus 8MB / 16MB / 128MB	
Power Requirement	120 VAC, 12A, 60Hz	
Power Consumption	Max.: Less than 1.2 kW	
	Energy Saver mode: Approx. 40 Wh Sleep mode: Approx. 1.5 Wh	
Dimensions (W x D x H)*5	23.1" x 23.8" x 16.1" (588 x 605 x 410 mm)	
Weight*5	91 lbs (41 kg)	

Printer / Scanner

Printer Interface	Bi-directional Parallel (IEEE1284)
	Network (Ethernet 10Base-T/100Base-TX) with optional 10/100 Ethernet Interface Kit
Printing Speed	18 ppm
Printing Resolution	600 dpi
Scanning Resolution	600 dpi
Scanner Driver	TWAIN
OS	Windows® 98 / Me / XP / 2000, Windows NT® 4.0
Page Description Language	PCL6 Emulation (with optional PCL6 Emulation Kit)

Notes

- *1 Optional ADF is required.
- *2 Local connection only.
- *3 Optional 10/100 Ethernet Interface Kit is required.
- *4 Optional PCL6 Emulation Kit is required.
- *5 Dimensions and weight are approximate.

Microsoft®, Windows® and Windows NT® are registered trademarks of Microsoft Corporation.
PCL is a registered trademark of Hewlett-Packard.
WORKiO is a registered trademark of Matsushita Graphic Communication Systems, Inc.
All product names are trademarks of their respective holders.

Design and specifications are subject to change without notice.

ISO 9001 Quality Management System

Every aspect of Matsushita Graphic Communication Systems, Inc. (MGCS)'s office information equipment business processes, from manufacturing to marketing, conforms to the stringent ISO (International Organization for Standardization) 9001 quality management system standards.

Design, development, manufacture, installation, repair and maintenance of office information equipment, their associated devices and consumables.



In addition, MGCS's plants outside Japan have acquired ISO 9002 certification.



Panasonic Document Imaging Company
Business Unit of Matsushita Electric Corporation of America
Two Panasonic Way, Secaucus, NJ 07094
For a local dealer, please call 1-800-742-8086.
<http://www.panasonic.com/office>

