

Lead Taping Radial Lead Type

Dimensions in mm(not to scale)

Case size	Lead space (F)	2.5 mm	5.0 mm	7.5 mm
		$\phi 3$ x 5L	A	D
$\phi 4$ x 5L	B	A		
$\phi 5$ x 5L	C	A		
$\phi 6.3$ x 5L	C	A		
$\phi 8$ x 5L	C	E		
$\phi 4$ x 7L	B	A		
$\phi 5$ x 7L	C	A		
$\phi 6.3$ x 7L	C	A		
$\phi 8$ x 7L	C	E		
$\phi 5$ x 11L	C	D		
$\phi 6.3$ x 11.2L	C	D		
$\phi 8$ x 11.5L, 15L, 20L		E		
$\phi 10$ x 12.5L, 16L, 20L, 25L		F		
$\phi 12.5$ x 15L, 20L, 25L		G		
$\phi 16$ x 15L, 20L, 25L			H	
$\phi 18$ x 15L, 20L, 25L			H	

Figure A (Lead space 2.5mm / $\phi 3$ x 5), (Lead space 5.0 mm / $\phi 4$ x 5, $\phi 5$ x 5, $\phi 4$ x 7, $\phi 5$ x 7, $\phi 6.3$ x 7)

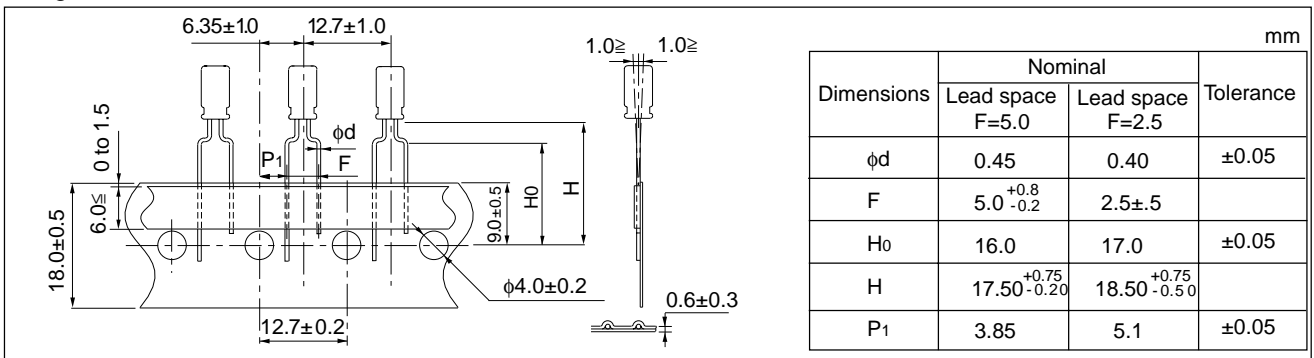


Figure B (Lead space 2.5mm / $\phi 4$ x 5, 7)


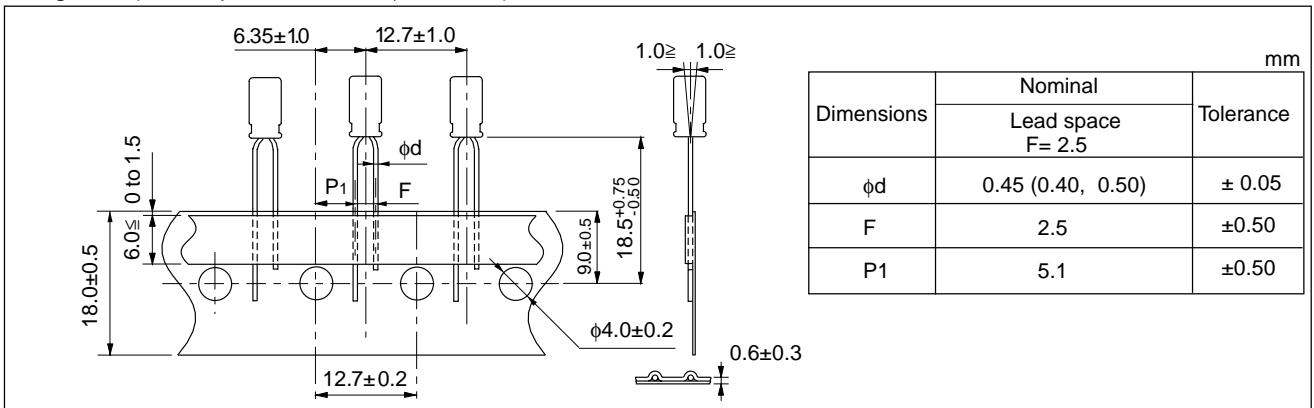



Figure C (Lead space 2.5mm / $\phi 5$ x 5, 7, 11, $\phi 6.3$ x 5, 7, 11.2, $\phi 8$ x 5, 7)

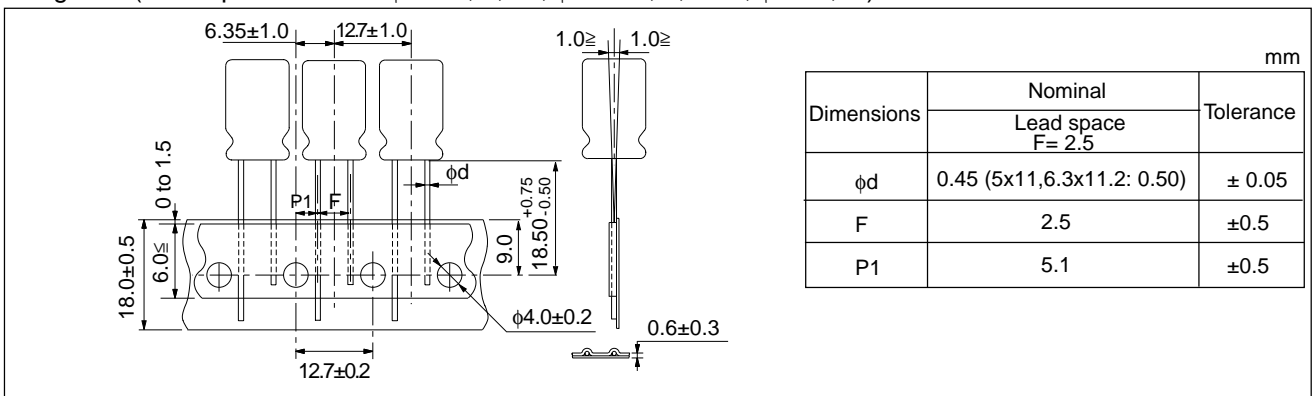


Design, Specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use. Whenever a doubt about safety arises from this product, please inform us immediately for technical consultation without fail.

Rev.02/04


■ Figure D (Lead Space: 5 mm / $\phi 3 \times 5$, $\phi 5 \times 11$, $\phi 6.3 \times 11.2$)

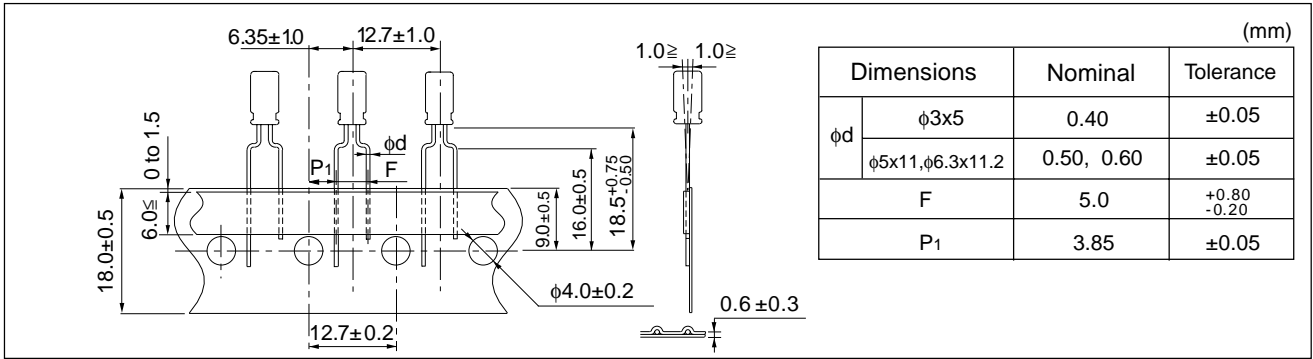


■ Figure E (Lead Space: 5 mm / $\phi 8 \times 5$, 7, 11.5, 15, 20)

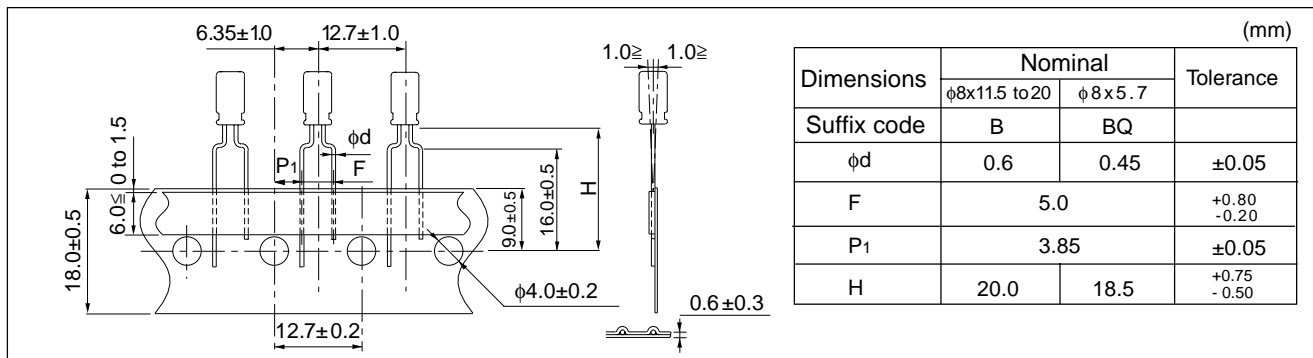

■ Figure F (Lead Space: 5 mm / $\phi 10 \times 12.5$, 16, 20, 25)

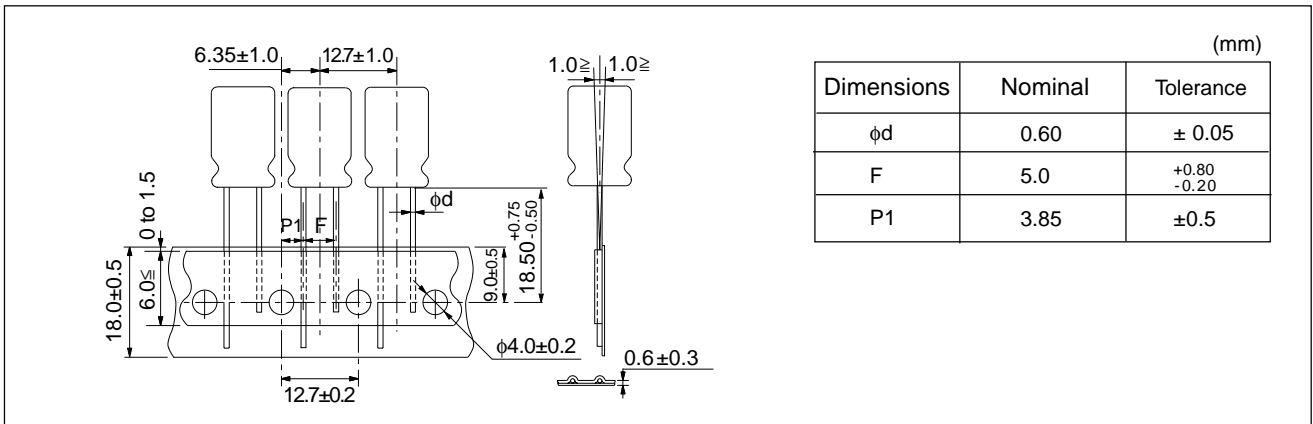


■ Figure G (Lead Space: 5 mm / $\phi 12.5 \times 15$, 20, 25)

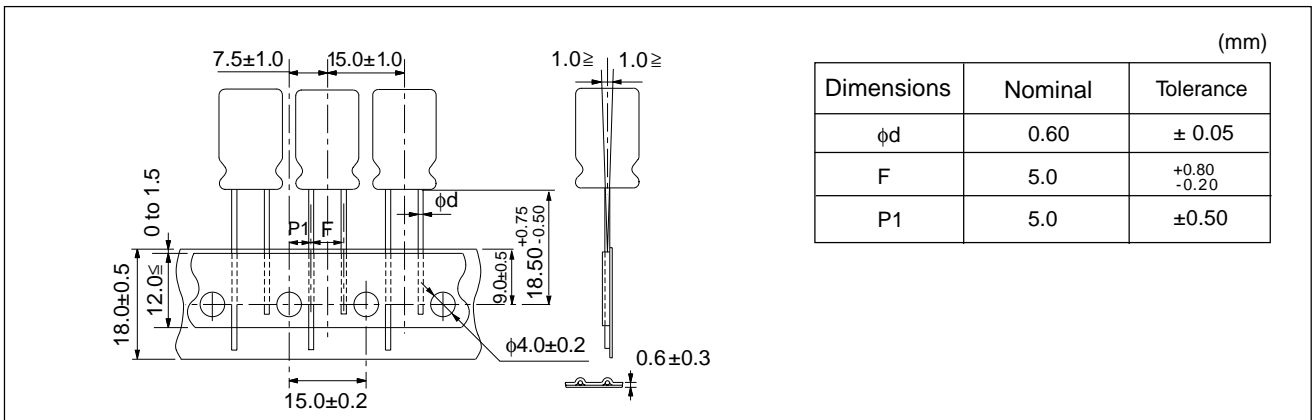


Design, Specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use. Whenever a doubt about safety arises from this product, please inform us immediately for technical consultation without fail.

■ Figure H (Lead Space: 7.5 mm / $\phi 16$, $\phi 18$)

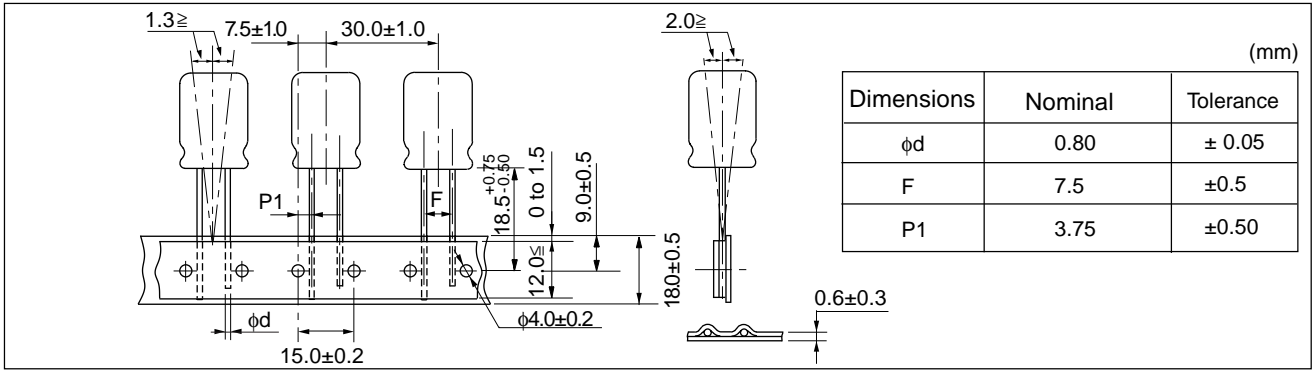


■ Packaging Specifications

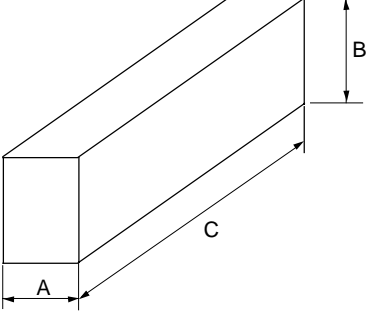Dimensions (mm)	Ammunition pack				
					
A	66 max				
B	330 max				
C	340 max				
Packaging Quantity	$\phi 3, \phi 4, \phi 5$ 2000 PCS.	$\phi 6.3$ 2000 PCS	$\phi 8$ 1000 PCS	$\phi 10, \phi 12.5$ 500 PCS	$\phi 16, \phi 18$ 250 PCS

Lead Forming Type (Snap-in)

Lead formed Aluminum Electrolytic Capacitor for self mounting. For rationalization and upgrade of soldering process.

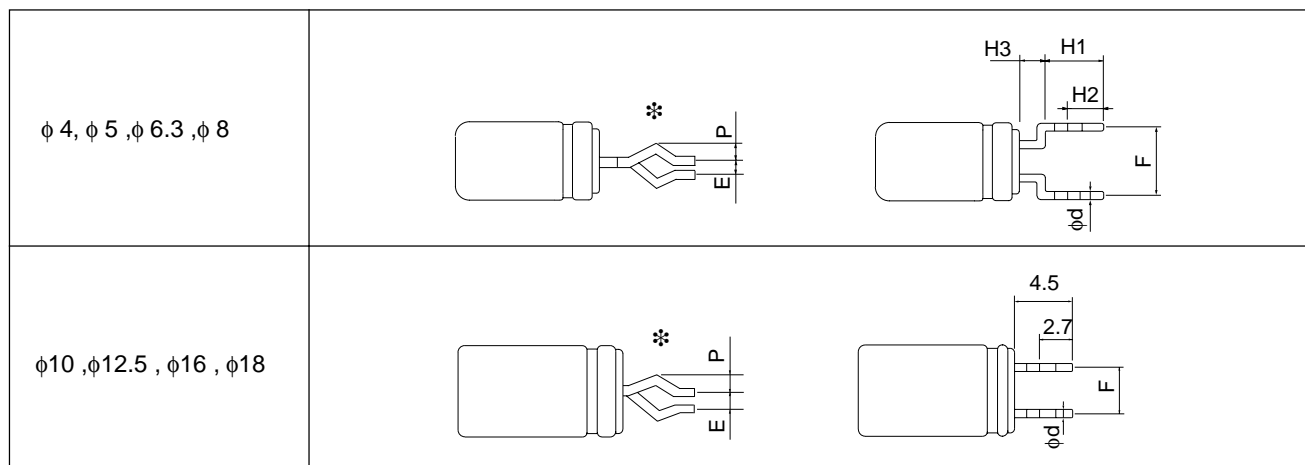

* Direction of bending shape is not specified

■ Dimensions in mm (not to scale)

Dia ϕ D	H1 \pm 0.5	H2	H3	F \pm 0.5	P	E max.	ϕ d	for PWB	
								hole dia. ϕ	thickness
5	4.5	2.7	2.5	5.0	1.0	1.0	0.5	0.8	1.6
6.3	4.5	2.7	2.5	5.0	1.0	1.0	* 0.5	1.0	1.6
8	4.5	2.7	2.5	5.0	1.0	1.0	0.6	1.0	1.6
10	4.5	2.7		5.0	1.0	1.0	0.6	1.0	1.6
12.5	4.5	2.7		5.0	1.0/0.9	1.0	0.6/0.8	1.0/1.1	1.6
16	4.5	2.7		7.5	0.9	1.0	0.8	1.1	1.6
18	4.5	2.7		7.5	0.9	1.0	0.8	1.1	1.6

*We have 2 lead diameters. 0.5 or 0.6 mm which depend on our series.

■ Series KA/KS Dimensions in mm (not to scale)

Dia ϕ D	H1 \pm 0.5	H2	H3 \pm 0.3	F \pm 0.5	P	E max.	ϕ d	for PWB	
								hole dia. ϕ	thickness
4	4.5	2.8	1.5	5.0	0.95	1.0	0.45	0.9	1.6
5	4.5	2.8	1.5	5.0	0.95	1.0	0.45	0.9	1.6
6.3	4.5	2.8	1.5	5.0	0.95	1.0	0.45	0.9	1.6