Panasonic

OPERATING INSTRUCTIONS

Air Purifier

Model No. F-PXV55M

This product is for indoor use only



CONTENTS

SAFETY PRECAUTIONS2~2 SETTING AND OPERATING REQUIREMENTS2 PRODUCT FEATURES
MAIN PARTS IDENTIFICATION
SETUP 7~8
OPERATION 9~10
• POWER OFF/ON•AIR VOLUME•ECONAVI ······
• PM2.5 • TIMER • CHILD LOCK······1
MAINTENANCE ······11~1
• CLEANING METHOD ······1
•FILTER REPLACEMENT ·······1
•WHEN IDLE FOR A LONG TIME ·······1
FURTHER INFORMATION 12~14
FAQ1
TROUBLESHOOTING1
SPECIFICATIONSBACK COVE
OPTIONAL ACCESSORIES BACK COVE

Warranty card attached

Thank you very much for purchasing this **Panasonic** product. Please read these operating instructions carefully before operation and maintenance. Also, be sure to read the "SAFETY PRECAUTIONS" section (P.2~4) before use.

Also, be sure to read the "SAFETY PRECAUTIONS" section ($P.2\sim4$) before use. Failure to comply with instructions could result in injury or property damage.

Make sure that the correct information is written on the warranty card, including the date of purchase and the name of the distributor. Keep the warranty card in a safe place along with the operating instructions for future reference.

- Disconnect power supply before maintenance.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- This product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the product by a person responsible for the safety. Children should be supervised to ensure that they do not play with the product.

The safety precautions should be strictly followed in order to prevent injury or damage to properties.

■ The following symbols differentiate the levels of danger or injury that may result if the product is not used correctly as instructed.



WARNING

Those things shown in this column indicate that there is possibility of causing death or severe injury.



Those things shown in this column indicate that there is possibility of causing minor injury or damage to properties.

■ The following symbols are used to indicate the type of instructions that need to be followed. (The symbols given below are examples)



This symbol indicates an action that must not be performed.



This symbol indicates an action that must be performed.

⚠ WARNING



■Do not pull the power cord when carrying or storing the product.

(Otherwise, the power cord may be damaged with the possibility of fire or electric shock.)

- Do not damage the power cord or power plug.
- Do not cut, modify, excessive distort, twist, squeeze the power cord, and do not place it near heat sources, place heavy weight on it, etc.
 (Otherwise, the power cord may be damaged with the possibility of fire or electric shock.)
- Do not insert your fingers, metallic objects or others into the air inlet, air outlet or gaps. (Otherwise, you may be hurt by the inner units with the possibility of electric shock or injury.)
- Do not let the product get wet.
- Do not place cups, etc. on the product.
 (Otherwise, the product may short circuit with the possibility of fire or electric shock.)



In case of any abnormality or malfunction, stop using the product immediately and disconnect the power plug.

(Otherwise, electric shock, fire or smoke may occur.) <Examples of abnormality/

- malfunction>The product stops operating when moving the power cord.
- If any switches do not work.
- If the circuit breaker is tripped or when fuse blows.
- If the power cord or power plug becomes abnormally hot.
- If you notice a burning smell or an abnormal sound or vibration.
- If there is any other abnormalities or malfunctions.
- → Please stop using the product immediately and disconnect the power plug, and contact the dealer to check and repair.

WARNING



■ Clean the power plug regularly.

(If dust is found on the power plug, insulation maybe damaged by humidity and fire may occur.)

- Disconnect the power plug and wipe it with dry cloth.
- When the product will not be used for a long period, disconnect the power
- Insert the power plug completely.

(If the power plug is not fully inserted, the power cord may be overheated, thus resulting in fire or electric shock.)

 Do not use damaged power plug or loosen power socket.



■ Do not disassemble or modify the product.

(Otherwise, the product may catch fire or malfunction, thus resulting in fire or electric shock.)

→ Contact the dealer for repair.



■ Do not use power other than the rated voltage.

(Otherwise, the power cord may overheat and induce fire.)

■Do not touch the power plug with wet hands. (Otherwise, electric shock may occur.)



CAUTION



■ Do not place the product in the following places.

- Incline and unstable place. (Otherwise, the product may fall over and injury may occur or damage the product.)
- Where the temperature or humidity is extremely high, or watery area, such as bathroom.
 - (Otherwise, current may leak with the possibility of fire or electric shock.)
- Where oil fume is emitted, such as in kitchens.
 - (Otherwise, the product may crack and injury may occur.)
- Where oil or inflammable gas is present and may be leaked.
 - (Otherwise, a fire may occur due to ignition in the product.)
- Where the air outlet faces animals or plants directly.
 - (Otherwise, it may cause discomfort to the animals and dry out the plant.)
- Do not place the product near combustible materials such as lighted cigarette, incense, etc.

(Otherwise, these may be absorbed into the product with possibility of fire.)



■ When carrying the product, please hold the left and right handles, but not the louver or front panel.

(Otherwise, the product may fall off, injury may occur.)



- When disconnecting the power plug, hold the power plug instead of the power cord.
 - (Otherwise, the power cord may be damaged with the possibility of fire or electric shock.)
- Keep the room well-ventilated when using the product together with a burner.
 - (Otherwise, carbon monoxide poisoning may occur.)
 - This product cannot remove carbon monoxide.

! CAUTION



■ Do not clean the product with gasoline or other volatile mixture solvents, and avoid contacting with spray insecticides. (Otherwise, the product may crack or

(Otherwise, the product may crack or short circuit with the possibility of injury, fire or electric shock.)

- Do not operate this product in places where indoor fumigation type insecticides are being used. (Chemical residue may build up inside the product and discharge from the air outlet, and cause damage to health.)
- → Ventilate the room with fresh air thoroughly after using insecticides before operating the product.



■ Do not sit on or lean against this product.

(Otherwise, the product may fall over and injury may occur or damage the product.)

• Families with children should pay more attention

SETTING AND OPERATING REQUIREMENTS

Area that can enhance the effectiveness!

■ Way to against PM2.5 and indoor dust, etc. Since PM2.5, dust, etc are likely to float in the air near the floor, we recommend you to place the product on flat floor in the room.



■ Way to circulate air more effectively.

Place the product with its left, right and top about 30 cm or more away from walls, furniture or curtains, etc, otherwise, the pollutants are difficult to be cleared.

To ensure effectiveness of this product, keep its back at least 1 cm away from the wall.

■ If the product is used in the same place for a long period.

It may result in dirty surrounding walls or floor. We recommend that you move the product away from where it is placed when maintaining it.

- Do not use the same power socket with TV, radio, etc.
 - (Otherwise, visual disturbances or noises may be caused.)
- → In this case, insert the power plug into another power socket.
- ■Do not place obstacles on the product air inlet and outlet.

(Otherwise it may affect product performance.)

■ Do not set the product in the following places.

- Where the product will be exposed directly to sunlight, outlet air of air conditioner or heat, etc. (Otherwise, deformation, degeneration, discolor or malfunction may be occurred.)
- Near equipment such as TV and radio. (Otherwise, visual disturbances or noises may be caused.)
- → Keep the product 1 m or above away from such devices.
- ■Do not place any object on the product.

(Otherwise, an operation error or malfunction may be caused.)

"House Dust Catcher" and "nanoe™X" give you clean and fresh air.

- House Dust Catcher completely cleaning dust from the air near the floor
- Equipped with nanoe[™]X technology
- Low power consumption in the Econavi mode

■ About nanoe[™] X

- The so-called nanoe™ X are charged water purification particles generated by applying high voltage to separate water molecules.
- nanoe™ X features: high moisture content, small particles, high stability, etc.




- 1. High moisture content (the moisture content is 1,000 times the moisture content of ordinary anions).
- 2. Small particles (about 5 nm 20 nm (nanometers) in size, able to penetrate deep into the fiber and stratum corneum).
- 3. High stability (6 times more stable than a common ion, covering a distance of 10 m or above).
- 4. More hydroxyl radicals (up to 4,800 billion of radicals are generated per second).
- 5. Weak acidity (with weak acidity features close to that of hair and skin).

All of the above features have been tested by SGS-CSTC Standards Technical Services Co., Ltd.


Note: nanoeTM and the nanoeTM mark are trademarks of Panasonic Holdings Corporation. nanoeTM X are particulate ions containing hydroxyl radicals whose amount is 10 times that of nanoeTM.

MAIN PARTS IDENTIFICATION

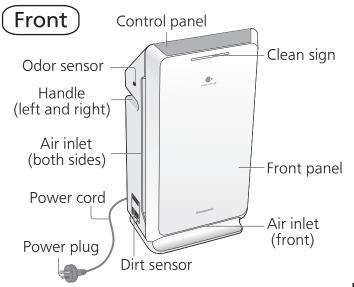

■ Dirt sensor and Odor sensor

Dirt sensor can detect air pollutants such as PM2.5(0.7 \sim 2.5 µm particles), etc. Odor senor can detect odor such as smoke, etc. The sensitivity of sensor can be adjusted. (P.13)



■ Clean sign

Show the air pollution levels detected by dirt sensor and odor sensor. The clean sign can be turned off (P.14).


.....

Blue: indicates clean

Red (small): indicates slight dirty

Red (large): indicates dirty

Control panel

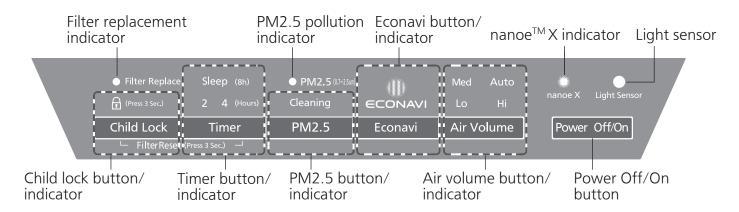

■ Filter replacement indicator

The indicator lights on indicates you need to replace HEPA composite filter. (P.12)

■ nanoe[™] X indicator

The indicator lights on indicates nanoe™ X is being generated. nanoe™ X will be generated in all operation modes except you switch off it. (P.12).

■ PM2.5 pollution indicator

The indicator lights on indicates PM2.5 pollution reaches a certain level. You can use PM2.5 mode at this moment to remove PM2.5 quickly. (P.10)

Light sensor

Detects the indoor brightness by the light sensor, the product can automatically adjust the brightness of indicators and the air volume. After you go to bed, it becomes dark in the room, then the product will switch to the "Sleep Mode Auto Operation". (P.14)


Before startup

Install filters


Fill in the label with the first date of use.


Remove the deodorizing filter from the poly bag.

① Remove the front panel.

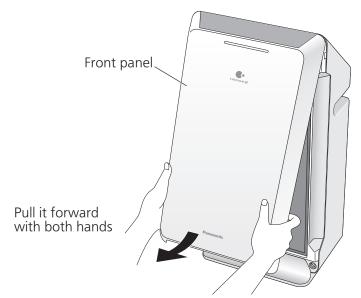

② Toggle the filter hook upward, and remove filters (2 types).

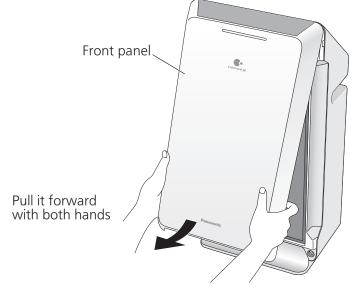

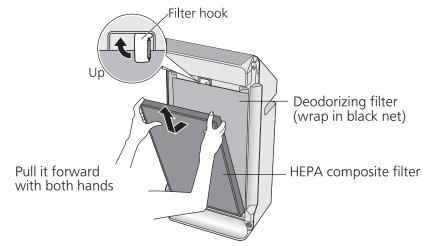

Notice)

③ Remove the deodorizing filter from the poly bag.

Please don't remove the black net of deodorizing filter.



■ HEPA composite filter replacement (About once every 10 years)

Replacement filter

Part No. F-ZXMP55Z

Date installed:

- Deodorizing filter replacement
- Replace a new one when the deodorizing function becomes less effective. (About once every 10 years)

Replacement filter

Part No. F-ZXHD55Z

Date installed:

Notice


Make sure to read page 2~4 before setting up the product.

Poly bag


Install filters Power-on

Install the filters (2 types) and front panel.

 Install deodorizing filter. (There is no distinction between inside and outside, upper and lower)



③ Toggle the filter hook downward, and secure filters.



② Install HEPA composite filter. (There is distinction between inside and outside, no distinction between upper and lower)

Install front panel.Fit the clutch into the indentation (2 places) of product.




Push in the protrusion into the holes (2 places) of product and press properly.


Notice

Be sure to install front panel before use.


Connect the power plug.




- When inserting the power plug, as the odor sensor uses the degree of cleanliness at this time as the standard, we recommend that you plug it in when the air is fresh (when there is no cigarette smoke). (The standard of the odor sensor automatically updates itself according to the degree of the indoor cleanliness.)
- Press Power Off/On button, then the clean sign blinks for about 5 seconds.



With the black side (front side) outward, fit it into the concave part of product.



OPERATION

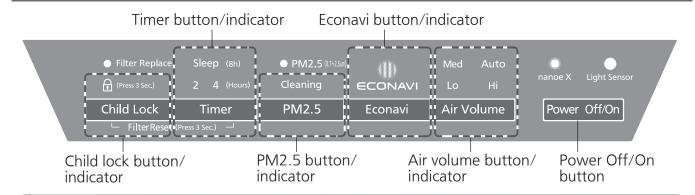

Power Off/On



Turn on or off the product.

Press the button to operate.

The product operates in auto air volume mode when it is used for the first time, then operates in the last mode when it was stopped.


■ Press the button again, the product stops operating.

Air volume



Select appropriate air volume for purifying air.

The indicator will be changed sequentially as figure below.

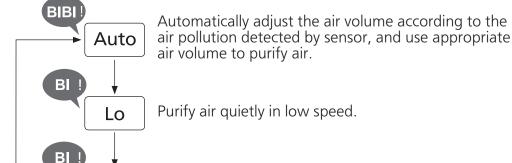

Purify air in medium speed.

Hi Purify air quickly.

(Indicator lights on)

Med

BI

Econavi



Smart power-saving mode.

Press the button will operate in Econavi mode. Econavi is a smart power-saving operation combined by the "patrol mode" and "learning mode", and it adjusts the air volume automatically. (P.13)



Press the button again to cancel. (convair indicator lights off) (Can also be canceled by pressing arvolume button)

(Indicator lights on)

OPERATION

PM2.5



Remove PM2.5 quickly.

When PM2.5 indicator is on, you can press the button to remove PM2.5 quickly, until the PM2.5 indicator lights off. (At this moment the PM2.5 mode will stop, then product will switch to the previous mode and continue.) But, If you press the button when PM2.5 indicator is off, the PM2.5 mode only will operate in 1 min, then product will switch to the previous mode and continue.

Cleaning (Indicator lights on)

Press the button again to cancel. (Cleaning indicator lights off)

(Notice)


When operates in PM2.5 mode, timer cannot be set.

Timer



Timer operation.

The indicator will be changed sequentially as figure below.



2 hours timer

The product will stop operating after 2 hours.

4 hours timer

The product will stop operating after 4 hours.

8 hours timer (sleep mode)

Clean sign and air volume indicator light off, indicators on control panel dim, and the product operates at low speed, then stops operating after 8 hours.

Cancel timer

Child lock



To prevent child from wrong operating.

Long press the button for 3 seconds, then the child lock is set. With this setting, other buttons are disabled when you press them, with sound "BI-BI-".

(Indicator lights on)

Notice

■ Do not shake the louver with hands during operation. (Otherwise, the angle and action range may change accordingly.)

- →Please stop operating the product immediately if it is shaken.

 (The product will restore to the normal status after it restarts.)
- If power failure occurs when product is operating, the product will restart automatically when power on again, and operate in the mode when power failure.

MAINTENANCE

Notice)

- For installation and removal methods of front panel and filters, please read P.7~8.
- When cleaning, do not leave the removed parts unattended.
 - (Otherwise, it may cause tripping or damage.)
- Do not operate the product when the HEPA composite filter is removed.

 (Dust will be inhaled into product inner parts,
 - and causes the product breakdown. The HEPA composite filter cannot function while it is removed.)
- Do not operate the product when the deodorizing filter is removed.
 - (The deodorizing filter cannot function while it is removed.)
- When using chemically treated cloth, be sure to follow the instructions carefully.

MWARNING



(Otherwise, the product might operate with the possibility of electric shock or injury.)

■ Do not use the detergents shown below.



Cleaning method


Deodorizing filter

- When there is dust around the deodorizing filter, remove the dust with a vacuum cleaner, etc.
- Do not wash the filter with water.

Dirt sensor < about once every 3 months >

Wipe the dirt off the lens with a dry cotton swab

- ① Remove the external cover of dirt sensor as shown below.
- ② Wipe the lens with a dry cotton swab as shown below.



- Wipe the lens periodically. (The sensor may not function normally with accumulation of moisture and smoke from cigarette.)
- Do not insert a cotton swab in other parts other than the lens.
- Be sure to disconnect the power plug before cleaning.
- You can use a light to see the lens clearly.


HEPA composite filter < about once every 2 weeks >

Clean the black side (front side) with a vacuum cleaner, etc.

- Please do not punch too much, otherwise the filter may be damaged.
- Maintenance is unnecessary for the white side (back side).

 Do not wash the or gap suction nozzle
- Do not wash the filter with water.

Lay with newspapers, etc ____ to avoid dust messing floor.



Body and front panel < about once a month >

Wipe off any dust and dirt using a well wrung-out cloth

- Do not wipe it with a hard cloth or hardly. Otherwise, the surface may be damaged.
- Wipe the power plug with a dry cloth.

MAINTENANCE

Filter replacement

	HEPA composite filter	Deodorizing filter	
Replacement period	When the filter replacement indicator lights on. (About once every 10 years) [™]		
Conditions	When the product inhales the smoke of six cigarettes every day. (Japan Electrical Manufacturers' Association JEM1467)		

(Optional accessories: back cover)

- Filter replacement period may be shorten, depending on the environment (such as where smoking is frequent).
 - Please replace it when ineffective.
- ① After replacement, please connect power plug, then press child Lock and timer buttons at the same time for about 3 seconds until the filter replacement indicator turns off, then the reset is completed.
- ② Fill in installation date on the label in filter case, then stick it on product to cover the old date. (P.7)

$(\mathsf{Notice}\,)$

- The filter which needs to exchange cannot be used again even it is cleaned, please dispose it as non-flammable garbage.
- If the product is used in a room (especially hotel) with strong odor such as aromatic smell, cigarette smoke or barbecue smell, these odors may adhere to the filter. When the adsorption capacity of filter reaches saturation, odor will also be blown out again with the wind because of excess adsorption. When there is above situation, please clean the HEPA composite filter. If the situation persists, please replace the HEPA composite filter and deodorizing filter, even if the filter replacement indicator is off. In addition, if often used in a room with strong odor, please open the windows to ventilate the room regularly.

When idle for a long time

- ① Disconnect power after turning off the product. (The product still consumes power even at rest.)
- ② Maintain the product as usual.
- ③ Put the product into poly bag and carton, and keep it in a dry place. (If you overturn it or keep it flat, product malfunctions may occur.)

FURTHER INFORMATION

About nanoe™ X

- \blacksquare nanoeTM X can be switched off.
 - During operation, press and pm2.5 buttons at the same time for about 3 seconds (nanoeTM X indicator lights off). Press the buttons for about 3 seconds again to restart the nanoeTM X. (nanoeTM X cannot be set during product stops operating.)
- Conditions for nanoeTM X generation nanoeTM X is generated by using the air in the room. Therefore, due to the differences in temperature and humidity nanoeTM X may not be generated stably. Room temperature: about 5° $^{\circ}$ $^{\circ}$ (dew-point temperature: 2° or above) Relative humidity: about 30% $^{\circ}$ 85%
- When nanoe[™] X is generated, small amount of ozone will be released. However, the quantity will be far less than the level in natural environment such as forest, and not be harmful to human beings.

FURTHER INFORMATION

About HEPA composite filter

The HEPA composite filter which with the Bio-sterilization and Super Allergy-buster can inhibit allergens (pollen, dead mites and feces), bacteria, mold.

■ Super Allergy-buster: inhibits the activity of allergic substances (pollen, dead mites and feces). Testing authority: Osaka Municipal Technical Research Institute

Test method: check the decrease of refined house dust mite allergen, by using enzyme immune measuring method.

Inhibiting method: contact with Super Allergy-buster Target: allergens trapped by the filter (mites, pollen)

Test result: inhibited 99% and above. (Daikou research report No. 2127)


■ The HEPA composite filter might emit unique and harmless smell of "Green Tea Catechin", "Bio-sterilization" and "Super Allergy-buster".

About Econavi

Econavi mode refers to the automatic operation by combining the "patrol mode" in which the product detects the dirt in the air in the room every hour with the "learning mode" in which the product can forecast the dirt generation by mastering the generation time of dirt every day. Automatically stops operating when the clean air is detected, meanwhile it also operates in advance to eliminate the dirt effectively before spreading, thus reducing the operation time and saving power.

Patrol mode

The product will stop operating automatically after the air is cleaned. After the operation is paused for 50 min, the product will operate for 10 min with air volume set to "Med" in the patrol mode. While the operation is paused in the patrol mode, the product will operate with the suitable air volume corresponding to the dirtiness detected.



Learning mode


The product records the time and dirtiness of air during operation, and takes the preventive operation 5 min before the recorded dirt is generated in the next day. (Although the records are updated every day, the previous records will be lost once the power plug is disconnected.)

About odor sensor/dirt sensor

The sensor can detect the pollution of the air, and show the pollution level by indicator. The product can optimize the air volume automatically in auto operation according to the air quality.

Sensor	Sensing scope	May detect
Odor sensor	() al a u tua ma a coma u attaca u macamaca a ca al cumar macta	Humidity (water vapor), oilThe wind generated when a door is opened or closed, or sudden temperature changes
Dirt sensor	 PM2.5 (0.7~2.5 µm particles) Indoor dust (dust, dead bodies and excreta of ticks, mold spores, pollens, etc.) Smog (cigarettes, incenses, etc.) 	• Oil, fog-stated water drip

- The sensor's operation may vary depending on the indoor airflow condition if a heater is placed near the product in a room.
- The sensor is not designed to detect bacteria and viruses.
- The sensitivity of the sensor can be adjusted. (The default setting is "medium sensitivity".)
- ① Stop operating the product, then press Formation and Air Volume buttons at the same time for about 3 seconds. The indicator will light on in sequence as illustrated below.
- ② Please release the buttons, when the sensitivity is set as required.



FURTHER INFORMATION

Type of airflow

The louver move to the best position according to the air quality to clean the air.

Air quality	Clean sign	Action of louver	Figure
Air is clean	Blue	Switch direction	A
Odor, PM2.5 or smog is detected		Upward	B
House dust is detected	Red	Front	©
Odor/PM2.5/smog and house dust are detected		Switch direction	A



(A)

(B)

(C)






About sleep mode auto operation

Detects the indoor brightness by the light sensor, and automatically adjusts the brightness of indicators and the air volume. When sleeping, the room becomes dark, the indicators will be dimmed or light off and the air volume becomes low.

- "Sleep Mode Auto Operation" can be adjusted. (The default setting is "Sleep Mode Auto 1".)
- ① Stop operating the product, then press Timer and Econavi buttons at the same time for about 3 seconds. The indicator will light on in sequence as illustrated below.



② Please release the buttons, when the sensitivity is set as required.

Notice


When the air volume is set to "Hi", "Med" or "Lo", the air volume cannot adjust automatically.

Mode	Indicator	Indoor brightness		
		Dimness	Dark	
Sleep Mode Auto 1	Control panel	No change	Light low level	
	Clean sign	Light low level	Light off	
Sleep Mode Auto 2	Control panel	No change	Light low level	
	Clean sign	Light low level	Light low level	
No Sleep Mode Auto	Control panel	No change	No change	
	Clean sign	No change	No change	

FAQ

Please confirm the following before you put questions forward or send the product for repair.


Why is a "jee" sound from the emission outlet?



Why does the clean sign remain unchanged?

Such problems are easy to occur when the sensitivity of the sensor is low. You can adjust the sensor with a specified sensitivity. (P.13)

Q2 Why does the clean sign turn off during operation?



Q4 How to turn off the clean sign?



- Please press PM2.5 and Air Volume buttons at the same time for about 3 seconds during operation.
- Please press the buttons for about 3 seconds again to relight clean sign.

TROUBLESHOOTING

If a problem is encountered, please investigate it by going through the following items. If the problem still persists, please disconnect the power plug and contact the dealer for repair.

Possible situation	Please confirm the following		
1) The clean sign remains red even when the operation continues	 The indicator may turn red when the product is subject to steam in the bathroom or vapor emitting from sprayers. When sand flies off. Is the dirt sensor dirty? (P.11) 		
② Automatic operation cannot be stopped	■ When the setting of air volume is "Auto", the product will still operate with low air volume even if the air in the room is clean.		
3 The clean sign remains blue even when the air is dirty	 Is the product placed in area where polluted air is difficult to be cleared or the room size is too large for the product? (P.4, back cover) Is the dirt sensor dirty? (P.11) 		
4 Polluted air is difficult to be removed	■ Is the HEPA composite filter dirty? (P.11) → Please clean it. If the situation persists, replace the filter with a		
⑤ The air volume is small	new one.		
⑥ The odor from the product is unpleasant	 Is the body, front panel or filter dirty? (P.11) → If the problem persists after the filter is cleaned, please replace it with a new one. (The harmful carbon monoxide generated by cigarette cannot be removed) Has the product ever been used in a room with strong odor? If the product is used in a room with strong odor such as aromatic smell, cigarette smoke or barbecue smell, the filter replacement period may be shortened. → If you use the product in such environments, it is recommended to open the air ventilation system or open the windows to ventilate the room at the same time. If there is still strong odor to be blown out after the maintenance, please replace the HEPA composite filter and deodorizing filter, even if the filter replacement indicator does not light on. 		
⑦ There is sound	After pressing Power Off/On, you may hear some sound around the louver. This is normal.		

If any of the following cases occur, please contact the dealer immediately for repair.

All the air volume indicators are blinking	■ Product may be out of order.→ Please disconnect the power and contact the dealer for repair.
--	---

SPECIFICATIONS

Model number	F-PXV55M		
Power supply	220 V-240 V~ 50 Hz 220 V-230 V~ 60 Hz		
Air volume settings	Hi	Med	Lo
Power consumption (W)*1	49	11	7
Air volume (m³/min)	5.3	2.0	0.9
Floor area capacity *2	Up to 66 m² in a standard household room		
Power cord length	2.0 m		
Product dimension	300 mm x [195 mm+(Foot:10 mm)] x 580 mm (WxDxH)		
Product weight	5.8 kg		


^{%1} The power consumption is about 0.3 W when the operation is set to "Off". (With the power plug inserted).

Note: This product cannot remove hazardous substances such as carbon monoxide from the cigarette smoke.

OPTIONAL ACCESSORIES

Replacement HEPA composite filter

Part No.: F-ZXMP55Z



Replacement deodorizing filter

Part No.: F-ZXHD55Z

Please contact dealer

• All the air volume indicators are blinking. Product may be out of order.

Please disconnect the power and contact the dealer for repair.

For additional help please contact the Panasonic Customer Care Centre on 13 26 00.

Panasonic Corporation

© Panasonic Corporation 2022

Web Site: http://www.panasonic.com

Issue date: 12/2022 P1222-0 PV55M8954

^{*2} Floor area capacity is based on NRCC 54013, under the condition of high speed.