



Panasonic
AIR CONDITIONING



Whole Home Solutions
Ducted & Multi Room Air Conditioning
2023/24

QUALITY AIR FOR LIFE

Control Solutions

Easy-to-use, with multiple energy saving functions at your fingertips.

Available on Ducted and Mini VRF options, not available on Multi Systems.



CONEX

(CZ-RTC6 / CZ-RTC6BL / CZ-RTC6BLW)

Simple and sophisticated design in-and-out

User friendly interface with stylish design measuring just 86 x 86 mm, CONEX is an extremely compact remote controller which looks great in any room.

Easy control and access for end users, installers, and service partners with just one remote

User-friendly day-to-day operation for end users, simplified set up for installers, and convenient after-sales service access for service partners - all with one remote control.



Deluxe Wired Remote Controller



Large 3.5" full-dot LCD with white LED backlight

Characters and icons are clearly displayed for perfect visibility. With the white LED backlight, you can now change the temperature during the night without even turning on the light.

Stylish, easy-to-use touch key design

The elegant, flat design features large touch keys in a simple layout enabling easy, intuitive operation.



CONEX/CONEX Zone Controller



Individual Comfort and Energy Saving
Airflow Volume Control

The damper opening can be controlled with the CFC app. Adjust the air volume conveniently according to your daily life.

The living room damper opening is increased

For daily naps, reduce the air volume so that it doesn't get too cold.

Auto-optimised Comfort for Your Lifestyle
Weekly timer

Able to set 6 timers/day. Realise optimal control day & night for your lifestyle with timers.

Pre-cool 30 minutes before going to bed, living zone off 30 minutes later.

Cool your bedroom on weekend mornings to suit your oversleep.

Purifies Your Room with nanoe™ X
24hr Clean air

When you go out, clean the air with the nanoe™ mode. Pre-cool the living zone according to the time you return home.

24-hour nanoe™ Air Purification

Zone Status

Statistics



Other Hardware Requirements*
Router - Internet - Smartphone
(Required 2.4GHz transmission channel)
*Purchase and subscribe separately

Compatible Device and Browsers

- iOS 9.0 or above
- Android™ 5.0 Lollipop or later

Download Free App
Panasonic Comfort Cloud app

Note: Product images not to scale.

CONEX
Zone Controller



Product movie

Manage Up to 8 Zones with an Advanced Zone Control System



Ducted Air Conditioner



Intuitive Control with Comfort Cloud App

Each family member can control home AC from multiple devices




Compatible Device and Browsers.
• iOS 9.0 or above • Android™ 5.0 or above*



Zone controller CZ-RTC6Z

Thanks to built-in WLAN RC, set up is easy

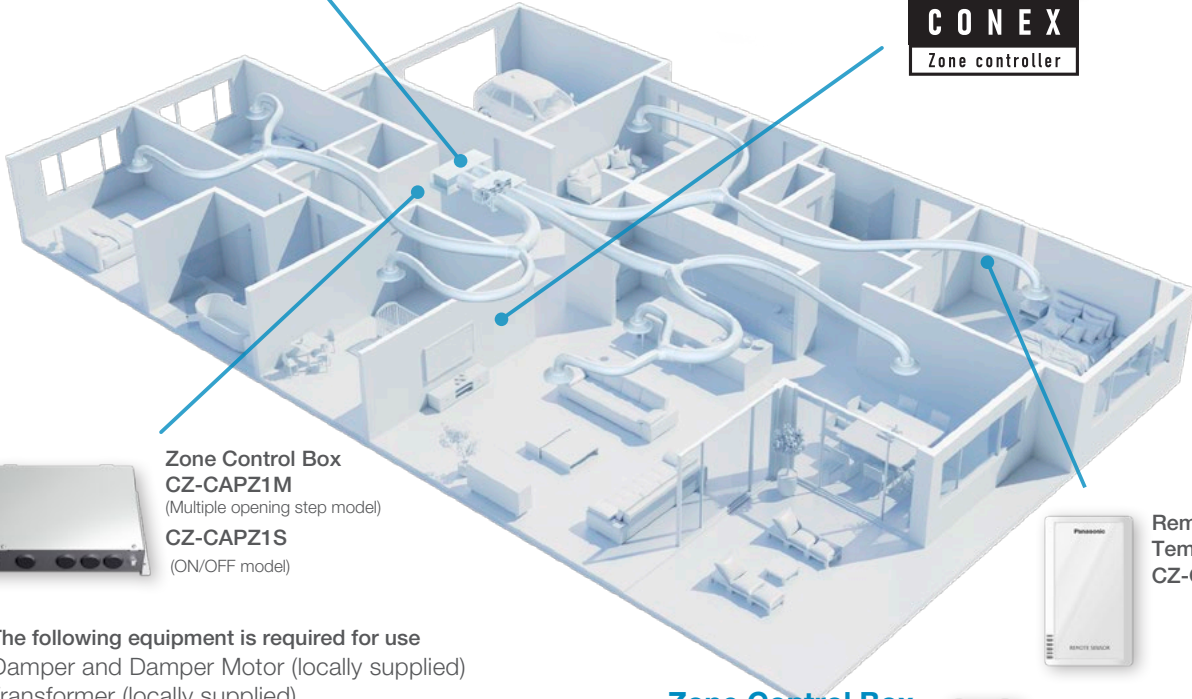

Zone Control Box
CZ-CAPZ1M
(Multiple opening step model)
CZ-CAPZ1S
(ON/OFF model)



Remote Temperature Sensor
CZ-CSRC3 (optional)

•The following equipment is required for use
Damper and Damper Motor (locally supplied)
/Transformer (locally supplied)

Zone Remote Controller



Spec & dimensions

Model No.	CZ-RTC6Z
Dimensions	(H) 86 mm x (W) 86 mm x (D) 25 mm
Weight	0.10 kg
Temperature / Humidity range	0°C to 40°C / 20% to 80% (No condensation) • Indoor use only.
Power Source	DC16 V (supplied from indoor unit)
Wireless LAN standard	IEEE 802.11 b/g/n
Frequency range	2.4 GHz band
Encryption	WPA2-PSK (TKIP/AES)
OS version on the mobile device for CFC	iOS: 9.0 or later Android™: 5.0 or later

Zone Control Box



Spec & dimensions

Model No.	CZ-CAPZ1S/CZ-CAPZ1M
Dimensions	(H) 250 mm x (W) 342 mm x (D) 70 mm
Weight	1.9 kg

Remote Temperature Sensor




Spec & dimensions

Model No.	CZ-CSRC3
Dimensions	(H) 120mm X (W) 70mm X (D) 17mm
Weight	70g
Temperature/Humidity range	0°C to 40°C / 20% to 80% (No condensation) Indoor use only.

Usable indoor units

Zone Controller can be connected with 3.6 kW to 22.4 kW Ducted (PE3 and PF3) Indoors and VRF Ducted units (M1, E1, E2, E1R, F2, F3 and Z1).



*Connectable to selected Panasonic ducted models only, please consult Panasonic for more details.

Series	PE3	PF3	MM1	ME1	ME2	ME1R	MF2	MF3	MZ1
Capacity	6.0 kW-22.4 kW	3.6 kW-14.0 kW	2.2 kW-5.6 kW	7.3 kW-14.0 kW	18.0 kW-28.0 kW	9.0 kW-16.0 kW	2.2 kW-16.0 kW		2.2 kW-7.3 kW

Note: Product images not to scale.

* iOS is the name of the OS of Apple Inc. iOS is a trademark or registered trademark of Cisco in the US and other countries where it is licensed for use.

Apple and the Apple logo are trademarks of Apple Inc. that are registered in the US and other countries. App Store is a service mark of Apple Inc.

* Android™, Google Play™ and Google Play™ logos are registered trademarks of Google LLC.

Panasonic Comfort Cloud features

Voice Control

Control air conditioning units by voice command intuitively connecting to smart speaker.*



Multiple User

The Panasonic Comfort Cloud App allows multiuser access control. Restrict user access to specific units.




From 1 to 200 units

User can control up to 200 indoor units. 10 different sites, with up to 20 units / groups per site.




Energy Monitor

See the estimated power consumption and compare with other periods to see how energy bill can be reduced even more.**



Easy Scheduling

Complex weekly scheduling made simple. Not only for one units, but across multiple sites and from a smartphone.




Error Codes

Error code notification through the App, provides early notification and allows for faster repair.



Application Examples

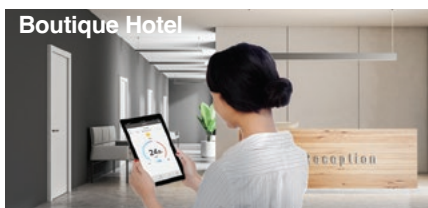

Centralised control from reception.



Multiple location control for small business.

System configuration

Network Adaptor

CZ-TACG1 CZ-CAPWFC1



Connection Diagram




Indoor Unit



Wireless LAN



Router



Panasonic Cloud Server

In conformity with IEEE 802.11

CZ-TACG1: For products for small sized project. (Page 40-41)

CZ-CAPWFC1: Available for all types of VRF and PAC indoor unit.

WLAN Smart Adaptor specification

	CZ-TACG1	CZ-CAPWFC1
Input Voltage	DC 1.2V (Supplied from indoor unit)	
Power Consumption	Maximum 0.66W	Maximum 2.4W
Size [H x W x D]	66 x 36 x 12mm	120 x 70 x 25mm
Weight	Approx. 85g	190g (including communications lines)
Interface	Wireless LAN	
Wireless LAN Standard	IEEE 802.11 b/g/n	
Frequency range	2.4GHz band	
Encryption	WPA2-PSK(TKIP/AES)	
Operation range	0-55°C, 20 - 80RH%	



Comfort Cloud App



Compatible Device and Browsers

1. IOS 9.0 or above
2. Android 4.4 or above

*1 Time of release in Quarter Three 2019.
 CZ-TACG1 or CZ-CAPWFC1 Network Adaptor required per unit.
 Requires an Internet connection and the App downloaded from the App Store or GooglePlay Store on your smartphone or tablet with the latest Operating System available.
 To use Amazon Alexa to control your air conditioner, you will need an Amazon Echo device.
 To use Google Assistant to control your air conditioner, you will need a Google Assistant device.
 Google is a trademark of Google LLC.
 Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.
 **2 Function available depending on the model.




Ducted System

Advantages

- Discrete and quiet
- Up to 8 rooms off one outdoor (up to 16kW)
- Range of different grill options
- Deluxe controller option
- Smart WiFi & Voice Control compatible

Considerations

- Requires access space either in the ceiling or under the house
- Single set temperature for all rooms

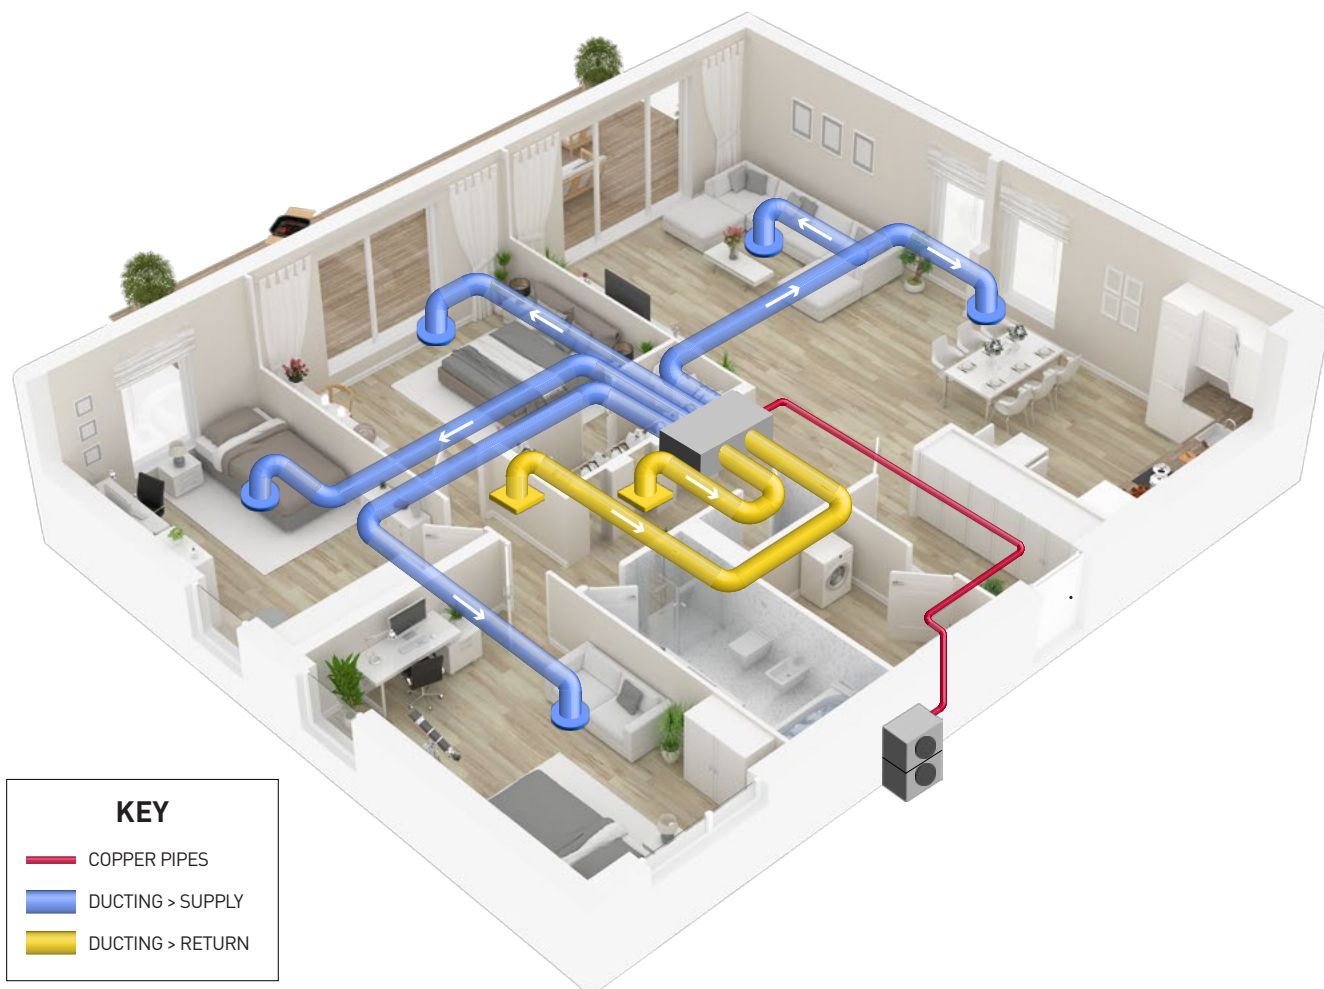



Zone Control


Manage up to 8 Zones with an Advanced Zone Control System

Advantages

- Individual comfort
- Airflow volume control
- Damper Position Control
- Weekly timer
- Target temperature control
- Track energy consumption
- On/Off nanoe™X
- Intuitive Control with Comfort Cloud App

Considerations

- Automation temperature control is limited to sensing Zone (easily switchable to 4 independent sensors or unit return), note sensors are additional cost.

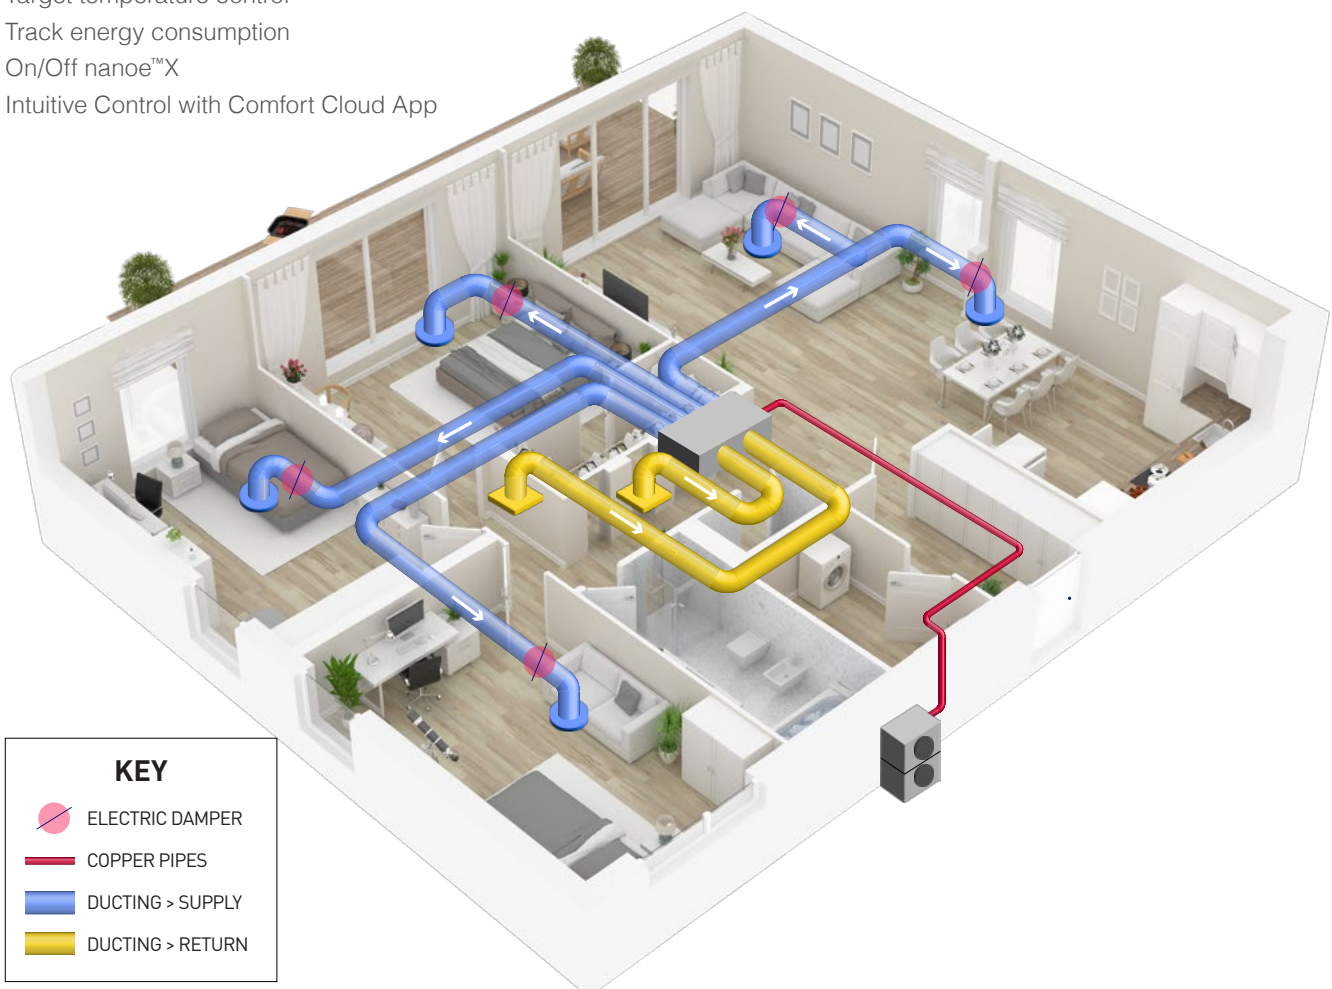




Multi System

Advantages

- Multiple indoor types
- Up to 5 rooms off one outdoor (up to 10kW)
- Individual control of each indoor unit
- Adjustable room temperatures
- Can be installed in most ceilings
- Smaller pipes so less space required in ceiling or underfloor cavity for installation
- Smart WiFi & Voice Control compatible

Considerations

- Deluxe controller not available
- Choose between:
 - Aero – includes built in WiFi and nanoe™X or
 - Developer – standard unit

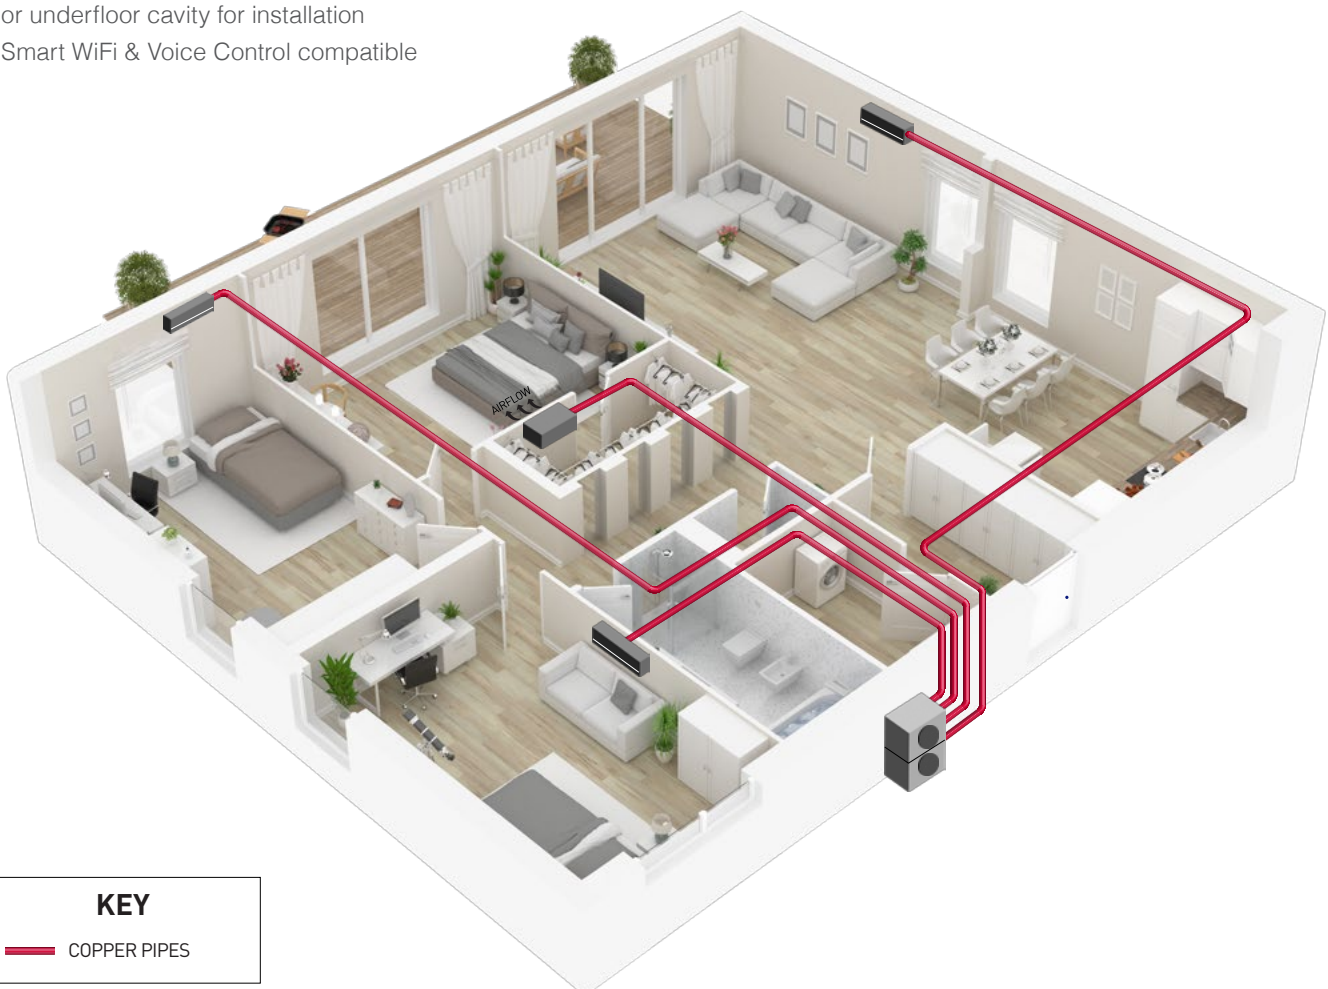




Mini VRF System

Advantages

- Multiple indoor types
- Up to 13 rooms off one outdoor (up to 28kW)
- Entire house off one outdoor
- Individual control of each indoor unit
- Long pipe lengths
- Adjustable room temperatures
- Suitable for larger homes
- Deluxe controller option
- Smaller pipes so less space required in ceiling or underfloor cavity for installation
- Smart WiFi & Voice Control compatible

Considerations

- Higher cost
- Expert design required
- Larger units require 3 phase power

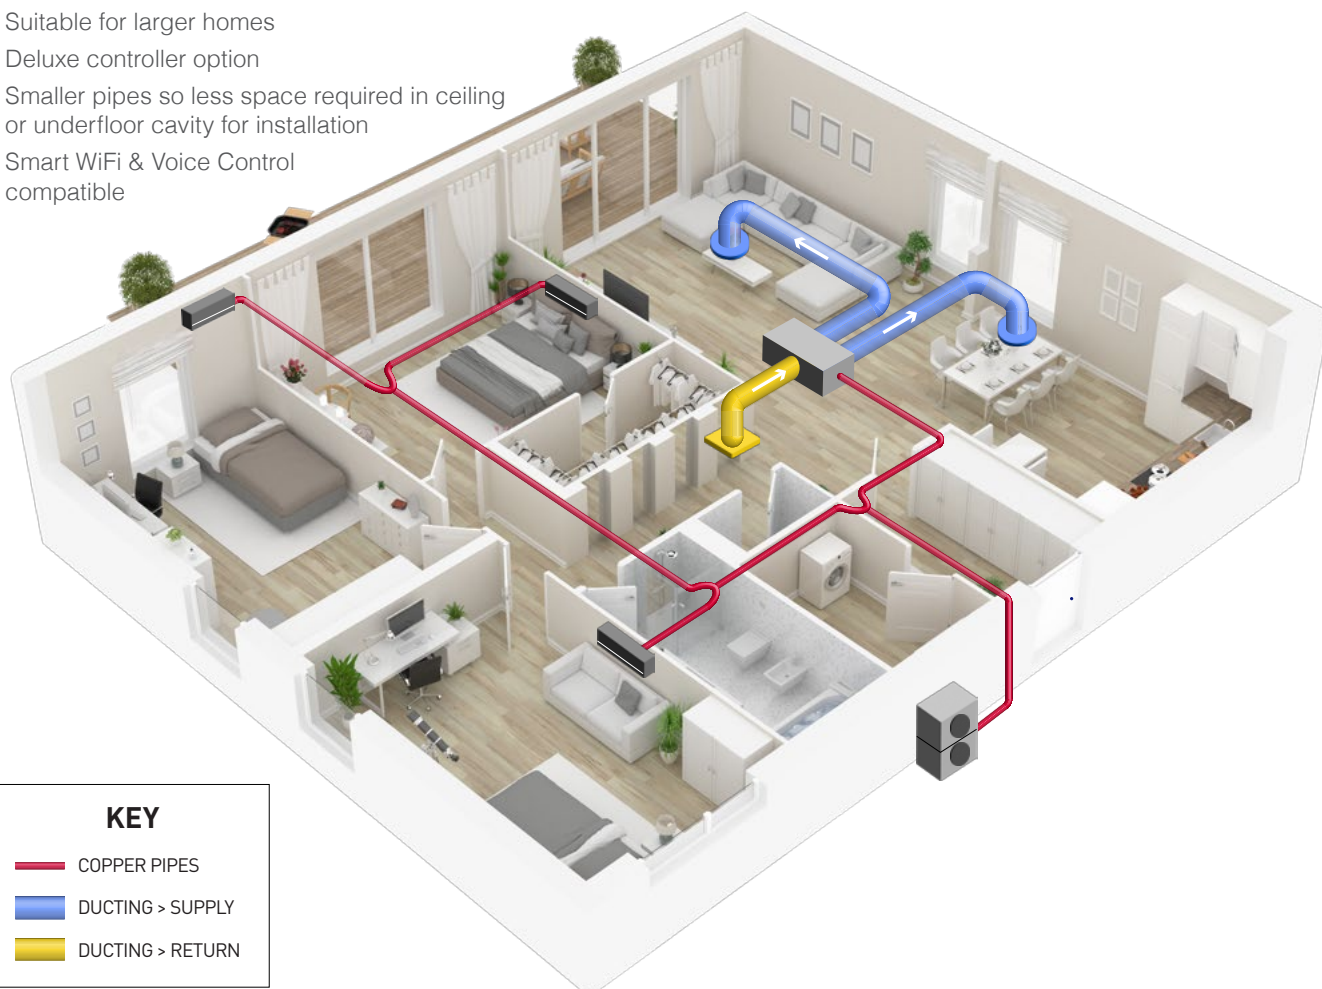

All side discharge R32 outdoor units

Panasonic's new range of outdoor units feature intuitive technology and thoughtful engineering. The two innovative ranges of R32 units, both Deluxe and Compact, feature energy and space saving technologies, permitting installation in even the tightest and most demanding conditions.



More Efficient, Less Space

Whilst maintaining its strong power, new R32 outdoor units get smaller. This enables them to fit into tighter spaces. Thus you can install these units in a vast variety of areas.


All side discharge from 6.0kw to 22.4kW

R32 Deluxe



Industry-leading Small Body with All 1-fan Models

R32 Compact

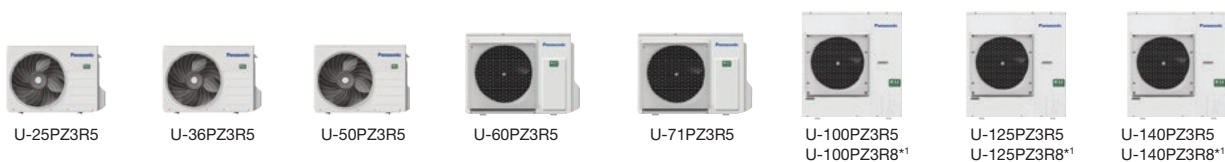


*¹ 3 phase

Precise Temperature Control

Constant Comfort Air Conditioning

R32 Deluxe


Another advantage of Panasonic Premium Inverter technology includes its ability to ensure precise temperature control and offer a wider power output range to perform in even the most extreme conditions in Australia, ensuring constant comfort.

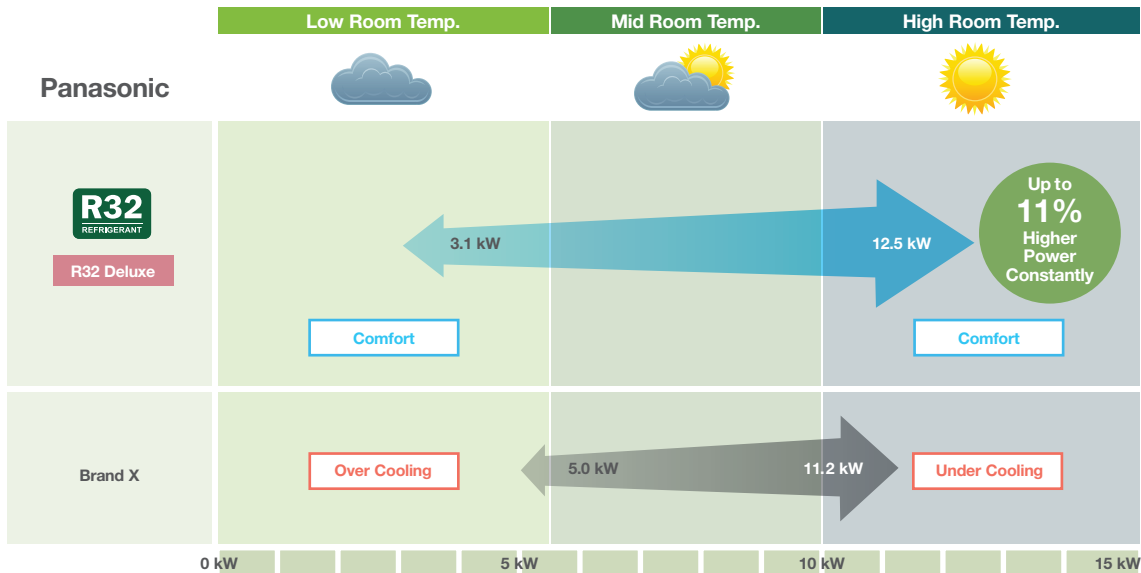

Graph shows each models' 10.0 kW Inverter High Static Pressure Ducted systems performance range during cooling.


NX Series - Refurbishing Made Easy

The new NX series has been developed to use 3-wired communication, making it simple to replace the three wire systems often used in older installations.

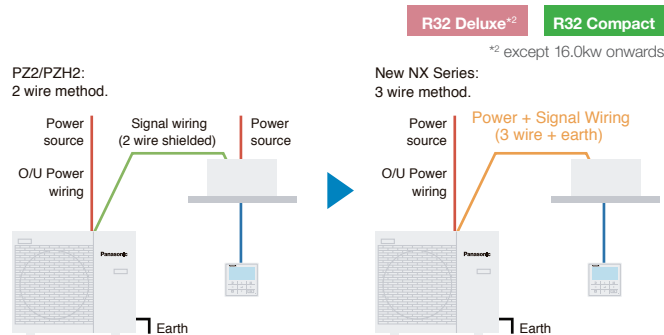

R22 Renewal. Fast, easy to install and cost-effective

Panasonic refrigerant oil is engineered to avoid the damage to units that can happen when oil types commonly found in air-conditioning systems react with each other. As well as preventing damage, this makes replacing R22 systems with the latest R32 model as simple as reusing the existing piping and replacing the indoor and outdoor unit. Switching to the latest R32 system also improves energy efficiency by approximately 30% compared to the R22 system.

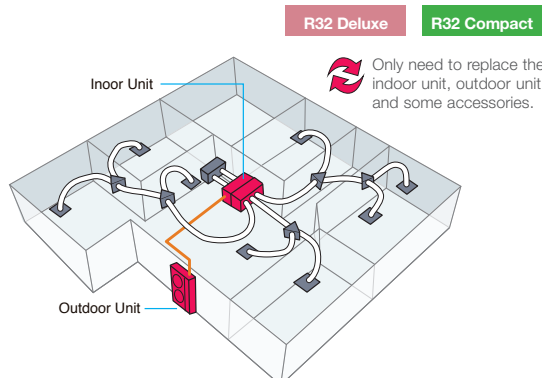

Note: Only use existing piping after checking "IN CASE OF REUSING EXISTING REFRIGERANT PIPING" in the installation manual.

Indoor Unit

High Static Pressure


Ducted

High static and large airflow ducted for exceptional installation flexibility.

nanoe™ X
nanoe™ X as a standard*
*nanoe X Generator Mark 2



ECONAVI ready


- 
Self-diagnosing Function
- 
Automatic Fan Operation
- 
Dry mode
- 
Automatic Restart Function
- 
DC Motor*¹
*1 only for 6.0-12.5kw

Technical focus

- Design flexibility thanks to high static pressure and large air volume
 - Accurate temperature control to reduce cold drafts during operation
- Configurable air temperature control


Compact Body Size

Hidden in the ceiling, ideal when interior decor is an important consideration such as in residences with many rooms and light commercial buildings.

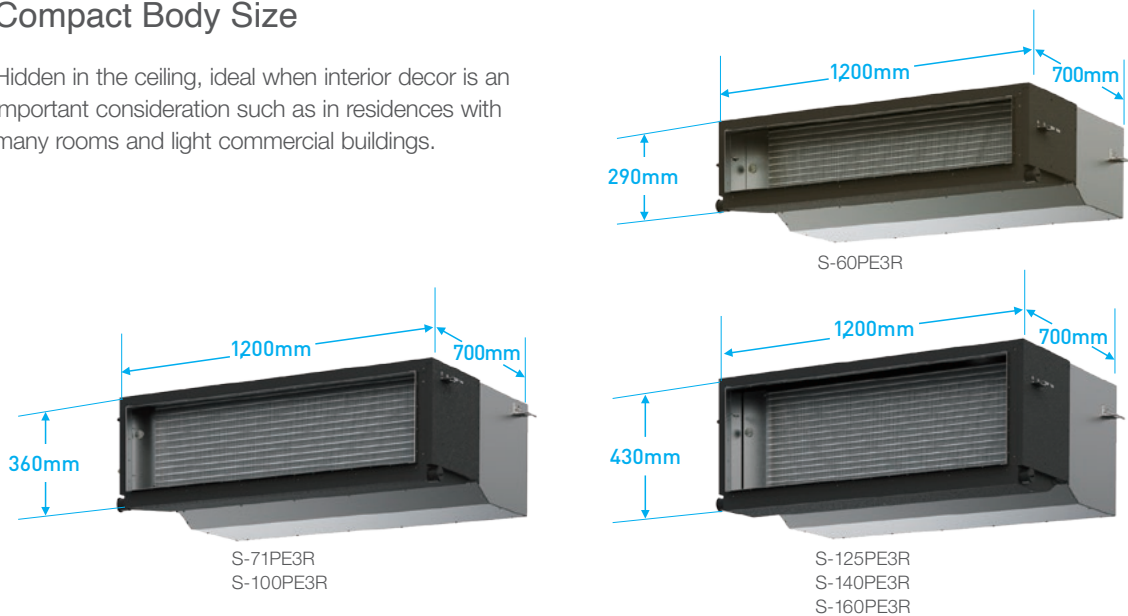

System Example

An inspection port (450 mm x 450 mm or more) is required at the control-box side of the indoor unit body.

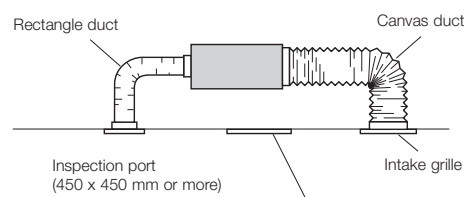

HSP Ducted



Product movie

S-60PE3R




S-71PE3R
S-100PE3R



S-125PE3R
S-140PE3R
S-160PE3R



CZ-RTC6
CZ-RTC6BL
CZ-RTC6BLW



CZ-RTC6Z*



CZ-RTC5B



CZ-RTC4



CZ-CAPWFC1




CZ-CENSC1

*Zone Controller for residential use
Note: Product image not to scale.

Clean air. Ducts that deliver

Testing has verified that even with three bends and a total length of up to 10m, the effectiveness of nanoe™ X is maintained right through the duct to deliver clean, fresh air where it's needed.

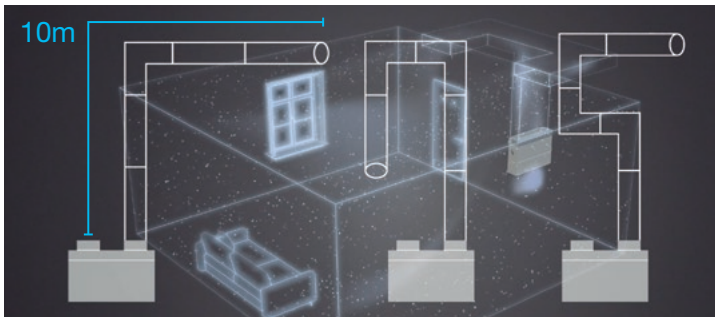

Bend once

Bend twice


Bend three times

As the experiments demonstrate, even with a total ductwork length of up to 10m, effectiveness of nanoe™ X is maintained.

Note: PF3 and PE3 (16.0kW and below) ranges only.

Cold Drafts Reduced During Heating Operation

- Accurate temperature measurement by E1/E2 sensor to reduce cold drafts during heating operation.

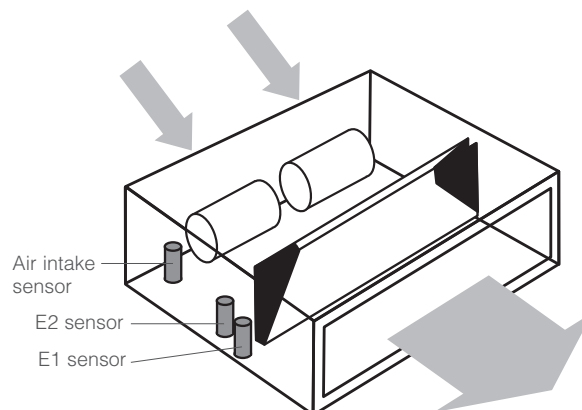

Indoor Unit: High Static Pressure Ducted

High Static Pressure Duct R32 Deluxe model



Capacity			7.1kW	10.0kW	12.5kW
Model Name	Indoor Unit		S-71PE3R	S-100PE3R	S-125PE3R
	Outdoor Unit		U-71PZH3R5	U-100PZH3R5	U-125PZH3R5
Cooling capacity : Heating capacity	kW		7.1 (2.2 - 9.0) 8.0 (2.0 - 9.0)	10.0 (3.1 - 12.5) 11.2 (3.1 - 14.0)	10.0 (3.1 - 12.5) 11.2 (3.1 - 14.0)
		BTU/h	24,200 (7,500 - 30,700) 27,300 (6,800 - 30,700)	34,100 (10,600 - 42,700) 38,200 (10,600 - 47,800)	34,100 (10,600 - 42,700) 38,200 (10,600 - 47,800)
EER : COP	W/W		3.48 : 3.88	3.79 : 3.78	3.79 : 3.78
COP@H2 condition	W/W		2.80	2.77	2.72
Total power input	Cooling : Heating kW		2.04 : 2.06	2.64 : 2.96	2.64 : 2.96
		Residential	Hot Climate Average Climate	4.68 : 4.82 4.11 : 4.22	5.04 : 5.10 4.46 : 4.34
TCSPF : HSPF	Commercial	Hot Climate	4.19 : 3.79	4.54 : 3.93	4.54 : 3.93
		Average Climate	5.15 : 4.85	5.55 : 5.15	5.55 : 5.15
	Cold Climate	Hot Climate	5.00 : 4.52	5.47 : 4.73	5.47 : 4.73
		Average Climate	5.37 : 4.11	5.87 : 4.32	5.87 : 4.32
Indoor Unit					
Power source	Phase/Hz		1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
	V		230V 240V	230V 240V	230V 240V
Current (rated)	Cooling : Heating		— ¹	— ¹	— ¹
Dimension H x W x D	Indoor	mm	360 X 1,200 X 700	360 X 1,200 X 700	360 X 1,200 X 700
Net weight	Indoor	kg	36	37	41
Air volume (H/M/L)	Cooling : Heating	L/s	501 / 434 / 367 : 501 / 434 / 367	668 / 584 / 484 : 668 / 584 / 484	668 / 584 / 484 : 668 / 584 / 484
External static pressure		Pa	100 (10 - 150)	100 (10 - 150)	100 (10 - 150)
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	45 / 44 / 43 : 45 / 44 / 43	48 / 46 / 44 : 48 / 46 / 44	48 / 46 / 44 : 48 / 46 / 44
Sound power level (H/M/L)	Cooling : Heating	dB	62 / 61 / 60 : 62 / 61 / 60	70 / 68 / 66 : 70 / 68 / 66	70 / 68 / 66 : 70 / 68 / 66
Number of fan speeds			3	3	3
Drain piping		mm	VP-25	VP-25	VP-25
Outdoor Unit					
Power source	Phase/Hz		1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
	V		230V 240V	230V 240V	400V 415V
Current (rated)	Cooling : Heating	A	9.85 : 9.95 9.55 : 9.65	12.8 : 14.3 12.2 : 13.7	4.25 : 4.75 4.15 : 4.60
Dimension H x W x D		mm	996 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340
Net weight		kg	66	99	99
Air volume	Cooling : Heating	L/s	1,018 : 1,002	1,970 : 1,803	1,970 : 1,803
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 50 (48)	52 (50) : 52 (50)	52 (50) : 52 (50)
Sound power level (Silent mode)	Cooling : Heating	dB	64 (62) : 66 (64)	68 (66) : 68 (66)	68 (66) : 68 (66)
Piping connections	Liquid / Gas	mm	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range	min. - max.	m	5 - 50	5 - 85	5 - 85
Elevation difference (OU located lower, OU located higher)		m	15, 30	15, 30	15, 30
Maximum chargeless length		m	30	30	30
Refrigerant at shipping / Additional gas amount		g	R32 1,950 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)
Operating range	Cooling : Heating	°C	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24

Specifications of R32 Compact Model



Capacity			6.0kW	7.1kW	10.0kW
Model Name	Indoor Unit		S-60PE3R	S-71PE3R	S-100PE3R
	Outdoor Unit		U-60PZ3R5	U-71PZ3R5	U-100PZ3R5
Cooling capacity : Heating capacity	kW		6.0 (2.0 - 7.1) 6.0 (1.8 - 7.0)	7.1 (2.6 - 7.7) 7.1 (2.1 - 8.1)	10.0 (3.0 - 11.5) 10.0 (3.0 - 14.0)
		BTU/h	20,500 (6,800 - 24,200) 20,500 (6,100 - 23,900)	24,200 (8,900 - 26,300) 24,200 (7,200 - 27,600)	34,100 (10,200 - 39,200) 34,100 (10,200 - 47,800)
EER : COP	W/W		3.26 : 4.08	3.21 : 4.25	3.58 : 4.08
COP@H2 condition	W/W		3.00	3.11	2.88
Total power input	Cooling : Heating kW		1.84 : 1.47	2.21 : 1.67	2.79 : 2.45
		Residential	Hot Climate Average Climate	3.98 : 3.95 3.56 : 3.88	3.96 : 4.05 3.59 : 4.00
TCSPF : HSPF	Commercial	Hot Climate	3.58 : 3.59	3.63 : 3.70	4.23 : 3.55
		Average Climate	4.25 : 3.83	4.22 : 3.91	4.99 : 3.90
	Cold Climate	Hot Climate	4.16 : 3.74	4.19 : 3.83	4.98 : 3.80
		Average Climate	4.38 : 3.58	4.41 : 3.67	5.28 : 3.61
Indoor Unit					
Power source	Phase/Hz		1 Phase / 50Hz	1 Phase / 50Hz	1 Phase / 50Hz
	V		230V 240V	230V 240V	230V 240V
Dimensions H x W x D	Indoor	mm	290 x 1,200 x 700	360 x 1,200 x 700	360 x 1,200 x 700
Net weight	Indoor / Panel	kg	31	36	37
Air volume (H/M/L)	Cooling : Heating	L/s	367 / 334 / 267 : 367 / 334 / 267	501 / 434 / 367 : 501 / 434 / 367	668 / 584 / 484 : 668 / 584 / 484
External static pressure		Pa	70 (10 - 150)	100 (10 - 150)	100 (10 - 150)
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	43 / 41 / 40 : 43 / 41 / 40	45 / 44 / 43 : 45 / 44 / 43	48 / 46 / 44 : 48 / 46 / 44
Sound power level (H/M/L)	Cooling : Heating	dB	60 / 58 / 57 : 60 / 58 / 57	62 / 61 / 60 : 62 / 61 / 60	70 / 68 / 66 : 70 / 68 / 66
Number of fan speeds			3	3	3
Drain piping		mm	VP-25	VP-25	VP-25
Outdoor Unit					
Power source	Phase/Hz		1 Phase / 50Hz	1 Phase / 50Hz	3 Phase / 50Hz
	V		230V 240V	230V 240V	400V 415V
Current (rated)	Cooling : Heating	A	8.50 : 6.85 8.15 : 6.60	10.3 : 8.00 9.90 : 7.65	13.9 : 12.4 13.4 : 11.9
Dimensions H x W x D		mm	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370
Net weight		kg	43	50	83
Air volume	Cooling : Heating	L/s	701 : 701	746 : 766	1,219 : 1,219
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 49 (47)	49 (47) : 49 (47)	52 (50) : 52 (50)
Sound power level (Silent mode)	Cooling : Heating	dB	66 (64) : 67 (65)	67 (65) : 67 (65)	70 (68) : 70 (68)
Piping connections	Liquid / Gas	mm	Ø6.35 / Ø12.7 ³	Ø6.35 / Ø15.88 ⁴	Ø9.52 / Ø15.88
Pipe length range	min. - max.	m	3 - 40	3 - 40	5 - 50
Elevation difference (OU located lower, OU located higher)		m	15, 30	15, 30	15, 30
Maximum chargeless length		m	30	30	30
Refrigerant at shipping / Additional gas amount		g	R32 1,130 / 15 (g/m)	R32 1,320 / 17 (g/m)	R32 2,400 / 45 (g/m)
Operating range	Cooling : Heating	°C	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

		14.0kW		16.0kW	
S-125PE3R	S-140PE3R	S-140PE3R	S-160PE3R	S-160PE3R	S-160PE3R
U-125PZH3R8	U-140PZH3R5	U-140PZH3R8	U-160PZH2R5	U-160PZH2R5	U-160PZH2R8
12.5 (3.2 - 14.0) 14.0 (3.2 - 16.0)	14.0 (3.3 - 16.0) 16.0 (3.3 - 18.0)	14.0 (3.3 - 16.0) 16.0 (3.3 - 18.0)	16.0 (5.5 - 18.0) 18.0 (5.5 - 20.0)	16.0 (5.5 - 18.0) 18.0 (5.5 - 20.0)	16.0 (5.5 - 18.0) 18.0 (5.5 - 20.0)
42,700 (10,900 - 47,800) 47,800 (10,900 - 54,600)	47,800 (11,300 - 54,600) 54,600 (11,300 - 61,400)	47,800 (11,300 - 54,600) 54,600 (11,300 - 61,400)	54,600 (18,800 - 61,400) 61,400 (18,800 - 68,200)	54,600 (18,800 - 61,400) 61,400 (18,800 - 68,200)	54,600 (18,800 - 61,400) 61,400 (18,800 - 68,200)
3.57 : 3.80	3.26 : 3.68	3.26 : 3.68	3.29 : 3.53	3.29 : 3.53	3.29 : 3.53
2.72	2.65	2.65	2.81	2.81	2.81
3.50 : 3.68	4.30 : 4.35	4.30 : 4.35	4.86 : 5.10	4.86 : 5.10	4.86 : 5.10
4.92 : 5.17	4.29 : 4.69	4.29 : 4.69	4.21 : 4.61	4.21 : 4.61	4.21 : 4.61
4.49 : 4.40	3.92 : 4.07	3.92 : 4.07	3.80 : 3.99	3.80 : 3.99	3.80 : 3.99
4.60 : 3.90	4.03 : 3.62	4.03 : 3.62	3.85 : 3.55	3.85 : 3.55	3.85 : 3.55
5.36 : 5.23	4.63 : 4.74	4.63 : 4.74	4.53 : 4.63	4.53 : 4.63	4.53 : 4.63
5.55 : 4.80	4.60 : 4.39	4.60 : 4.39	4.54 : 4.28	4.54 : 4.28	4.54 : 4.28
5.97 : 4.31	4.91 : 3.96	4.91 : 3.96	4.80 : 3.88	4.80 : 3.88	4.80 : 3.88
1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V
-*1	-*1	-*1	2.41 : 2.41 2.38 : 2.38	2.41 : 2.41 2.38 : 2.38	2.41 : 2.41 2.38 : 2.38
430 X 1,200 X 700	430 X 1,200 X 700	430 X 1,200 X 700	430 X 1,200 X 700	430 X 1,200 X 700	430 X 1,200 X 700
41	50	50	50	50	50
835 / 768 / 601 : 835 / 768 / 601	1,002 / 835 / 701 : 1,002 / 835 / 701	1,002 / 835 / 701 : 1,002 / 835 / 701	1,002 / 835 / 701 : 1,002 / 835 / 701	1,002 / 835 / 701 : 1,002 / 835 / 701	1,002 / 835 / 701 : 1,002 / 835 / 701
100 (10 - 150)	100 (50 - 150*)	100 (50 - 150*)	100 (50 - 150*)	100 (50 - 150*)	100 (50 - 150*)
49 / 47 / 45 : 49 / 47 / 45	51 / 49 / 47 : 51 / 49 / 47	51 / 49 / 47 : 51 / 49 / 47	51 / 49 / 47 : 51 / 49 / 47	51 / 49 / 47 : 51 / 49 / 47	51 / 49 / 47 : 51 / 49 / 47
71 / 69 / 67 : 71 / 69 / 67	73 / 71 / 69 : 73 / 71 / 69	73 / 71 / 69 : 73 / 71 / 69	73 / 71 / 69 : 73 / 71 / 69	73 / 71 / 69 : 73 / 71 / 69	73 / 71 / 69 : 73 / 71 / 69
3	3	3	3	3	3
VP-25	VP-25	VP-25	VP-25	VP-25	VP-25
3 Phase / 50Hz 400V 415V	1 Phase / 50Hz 230V 240V	3 Phase / 50Hz 400V 415V	1 Phase / 50Hz 230V 240V	3 Phase / 50Hz 400V 415V	3 Phase / 50Hz 400V 415V
5.60 : 5.90 5.40 : 5.70	19.7 : 19.9 18.9 : 19.1	6.60 : 6.70 6.35 : 6.45	20.0 : 21.1 19.1 : 20.1	6.95 : 7.30 6.65 : 7.00	6.95 : 7.30 6.65 : 7.00
1,416 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340	1,500 x 980 x 370	1,500 x 980 x 370	1,500 x 980 x 370
99	99	99	117	115	115
2,087 : 1,870	2,154 : 1,937	2,154 : 1,937	2,738 : 2,738	2,738 : 2,738	2,738 : 2,738
53 (51) : 53 (51)	54 (52) : 54 (52)	54 (52) : 54 (52)	58 (56) : 60 (58)	58 (56) : 60 (58)	58 (56) : 60 (58)
69 (67) : 69 (67)	70 (68) : 70 (68)	70 (68) : 70 (68)	76 (74) : 78 (76)	76 (74) : 78 (76)	76 (74) : 78 (76)
Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø19.05	Ø9.52 / Ø19.05	Ø9.52 / Ø19.05
5 - 85	5 - 85	5 - 85	5 - 75	5 - 75	5 - 75
15, 30	15, 30	15, 30	30, 30	30, 30	30, 30
30	30	30	30	30	30
R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,200 / 45 (g/m)	R32 3,200 / 45 (g/m)	R32 3,200 / 45 (g/m)
-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 46 : -20 to 24	-15 to 46 : -20 to 24	-15 to 46 : -20 to 24

12.5kW		14.0kW	
S-125PE3R	S-125PE3R	S-140PE3R	S-140PE3R
U-125PZ3R5	U-125PZ3R8	U-140PZ3R5	U-140PZ3R8
12.5 (3.2 - 13.5) 12.5 (3.3 - 15.0)	12.5 (3.2 - 13.5) 12.5 (3.3 - 15.0)	14.0 (3.3 - 15.0) 14.0 (3.4 - 16.0)	14.0 (3.3 - 15.0) 14.0 (3.4 - 16.0)
42,700 (10,900 - 46,100) 42,700 (11,300 - 51,200)	42,700 (10,900 - 46,100) 42,700 (11,300 - 51,200)	47,800 (11,300 - 51,200) 47,800 (11,600 - 54,600)	47,800 (11,300 - 51,200) 47,800 (11,600 - 54,600)
3.55 : 4.03	3.55 : 4.03	3.25 : 3.76	3.25 : 3.76
2.56	2.56	2.68	2.68
3.52 : 3.10	3.52 : 3.10	4.31 : 3.72	4.31 : 3.72
4.60 : 3.93	4.60 : 3.93	4.27 : 3.79	4.27 : 3.79
4.16 : 3.79	4.16 : 3.79	3.92 : 3.64	3.92 : 3.64
4.26 : 3.47	4.26 : 3.47	4.03 : 3.34	4.03 : 3.34
4.96 : 3.84	4.96 : 3.84	4.56 : 3.70	4.56 : 3.70
4.88 : 3.73	4.88 : 3.73	4.53 : 3.58	4.53 : 3.58
5.20 : 3.52	5.20 : 3.52	4.81 : 3.40	4.81 : 3.40
1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V
430 x 1,200 x 700	430 x 1,200 x 700	430 x 1,200 x 700	430 x 1,200 x 700
41	41	50	50
835 / 768 / 601 : 835 / 768 / 601	835 / 768 / 601 : 835 / 768 / 601	1,002 / 835 / 701 : 1,002 / 835 / 701	1,002 / 835 / 701 : 1,002 / 835 / 701
100 (10 - 150)	100 (10 - 150)	100 (50 - 150*)	100 (50 - 150*)
49 / 47 / 45 : 49 / 47 / 45	49 / 47 / 45 : 49 / 47 / 45	51 / 49 / 47 : 51 / 49 / 47	51 / 49 / 47 : 51 / 49 / 47
71 / 69 / 67 : 71 / 69 / 67	71 / 69 / 67 : 71 / 69 / 67	73 / 71 / 69 : 73 / 71 / 69	73 / 71 / 69 : 73 / 71 / 69
3	3	3	3
VP-25	VP-25	VP-25	VP-25
1 Phase / 50Hz 230V 240V	3 Phase / 50Hz 400V 415V	1 Phase / 50Hz 230V 240V	3 Phase / 50Hz 400V 415V
17.0 : 15.0 16.3 : 14.4	5.40 : 4.80 5.20 : 4.55	19.7 : 17.0 18.9 : 16.3	6.60 : 5.70 6.40 : 5.50
996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
87	87	87	87
1,369 : 1,336	1,369 : 1,336	1,402 : 1,369	1,402 : 1,369
55 (53) : 55 (53)	55 (53) : 55 (53)	56 (54) : 56 (54)	56 (54) : 56 (54)
73 (71) : 73 (71)	73 (71) : 73 (71)	74 (72) : 74 (72)	74 (72) : 74 (72)
Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
5 - 50	5 - 50	5 - 50	5 - 50
15, 30	15, 30	15, 30	15, 30
30	30	30	30
R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)	R32 2,800 / 45 (g/m)
-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

Notes:

- In the case of nanoe X OFF
 - In case it is necessary to indicate the air flow volume in (l/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point.
 - AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
 - TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
 - Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions.
- *1 Outdoor power supply.
 *2 Not adjustable, refer to "Indoor Fan Performance" section of technical data.
 *3 For piping connection for 6.0kW unit, connect the gas socket tube (Ø12.7-Ø15.88) to the gas tubing side indoor unit and connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.
 *4 For piping connection for 7.1kW unit, connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

Indoor Unit

High Static Pressure

Adaptive Ducted

Control all aspects of your environment with exceptional performance and quiet operation. Vertical installation flexibility offers the perfect solution when ceiling heights are restricted.

nanoe™ X
 nanoe™ X as a standard*
*nanoe X Generator Mark 2



ECONAVI ready


- 
 Self-diagnosing Function
- 
 Automatic Fan Operation
- 
 Dry mode
- 
 Automatic Restart Function
- 
 Built-in Drain Pump
- 
 DC Motor

Technical focus

- Space saving 250mm height
- Accurate temperature control to reduce cold drafts during operation
- DC fan motor for variable external static pressure control
- Configurable air temperature control
- Easy to install and maintain

Variable external static pressure control


Optimal airflow set-up is possible for different ducting design and conditions.

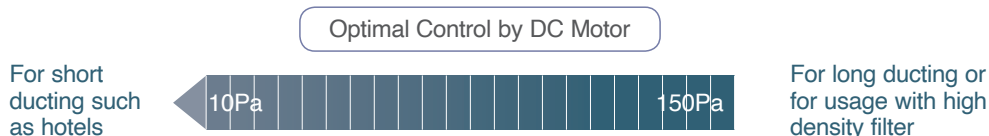

Note: Please refer to technical documents for detail.


Powerful 150Pa external static pressure in an industry-leading vertical installation design


Delivering static pressure up to 150Pa external static pressure, the industry-leading horizontal/vertical design offers the power you need in a compact form factor.



Selectable air inlet position

A removable panel allows air inlet position to be adjusted to enable rear or bottom entry, depending on ductwork installation.

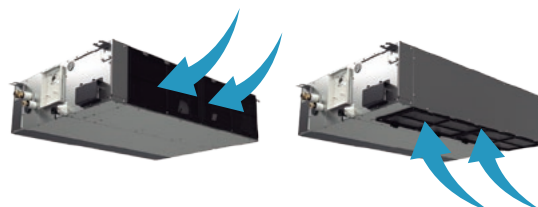

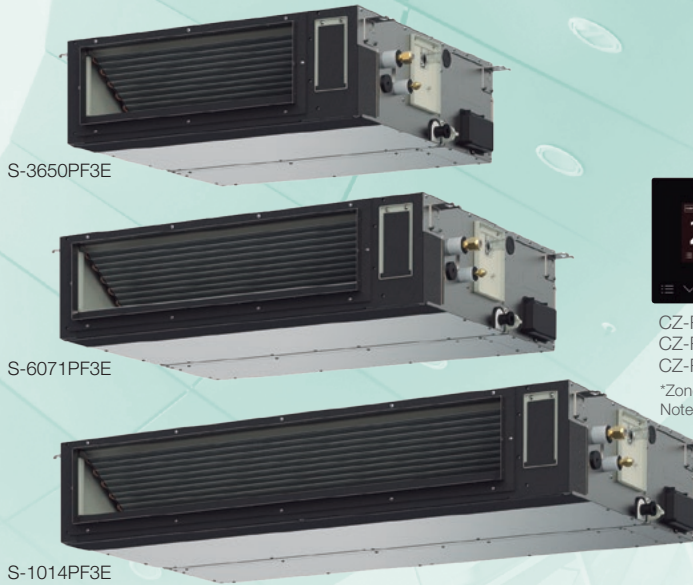


CZ-RTC6
CZ-RTC6BL
CZ-RTC6BLW
*Zone Controller for residential use
Note: Product image not to scale.

MSP Ducted



Product movie


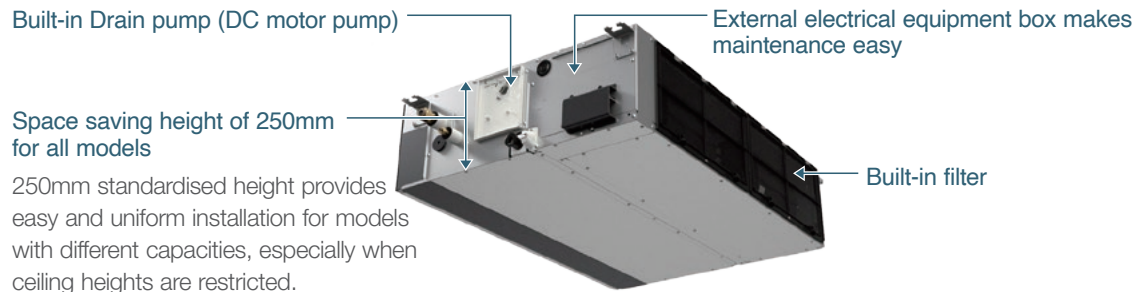


Space saving height of 250mm for all models
250mm standardised height provides easy and uniform installation for models with different capacities, especially when ceiling heights are restricted.

Top-class noise level performance

A proprietary improved casing design realises an even smoother airflow and low noise (22dB - 29dB) operation while effortlessly maintaining enough pressure*2 to deliver quiet comfort ideal for hotel and guest rooms.

*2 Operating at 50Pa static pressure in Low fan mode.

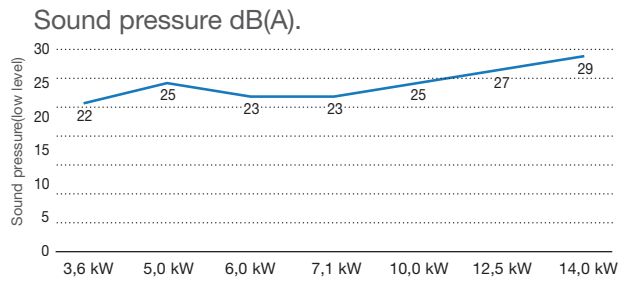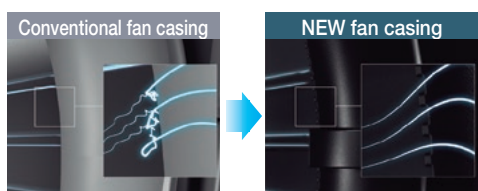


Note: Silent operation in full rated capacity.

Superior air quality

The new ducted models are equipped with nanoe™ X as standard, a unique air quality improvement technology producing twice the amount of hydroxyl radicals compared to previous generations. Combined with the strong static pressure this ensures pristine nanoe™ X air travels unaffected even through multiple duct shapes at lengths of 10m, as well as making them ideal for use in larger spaces.

Note: PF3 and PE3 (16.0kW and below) ranges only.

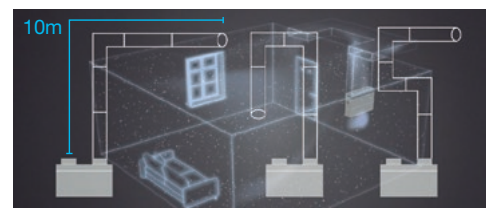

Based on in-house test result, even with a total ductwork length up to 10m, effectiveness of nanoe™ X is maintained.

Indoor Unit: High Static Pressure Adaptive Ducted

Specifications of R32 Deluxe Model

Capacity			6.8kW	9.5kW	12.1kW
Model Name	Indoor Unit		S-6071PF3E	S-1014PF3E	S-1014PF3E
	Outdoor Unit		U-71PZH3R5	U-100PZH3R5	U-100PZH3R8
Cooling capacity : Heating capacity	kW		6.8 (2.2 - 7.8) 7.5 (2.0 - 9.0)	9.5 (3.1 - 11.4) 10.8 (3.1 - 13.5)	9.5 (3.1 - 11.4) 10.8 (3.1 - 13.5)
		BTU/h	23,200 (7,500 - 26,600) 25,600 (6,800 - 30,700)	32,400 (10,600 - 38,900) 36,800 (10,600 - 46,100)	32,400 (10,600 - 38,900) 36,800 (10,600 - 46,100)
EER : COP	W/W		3.74 : 4.03	4.17 : 3.97	4.17 : 3.97
COP@H2 condition	W/W		2.96	2.90	2.90
Total power input	Cooling : Heating kW		1.82 : 1.86	2.28 : 2.72	2.28 : 2.72
		Residential	Hot Climate Average Climate	5.40 : 5.49 4.75 : 4.67	5.93 : 5.57 5.21 : 4.70
TCSPF : HSPF	Commercial	Cold Climate	4.82 : 4.13	5.29 : 4.21	5.29 : 4.21
		Hot Climate	6.02 : 5.54	6.59 : 5.61	6.59 : 5.61
		Average Climate	6.25 : 5.08	6.75 : 5.13	6.75 : 5.13
		Cold Climate	6.76 : 4.56	7.28 : 4.65	7.28 : 4.65
Indoor Unit					
Power source		Phase/Hz V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V
Dimension H x W x D	Indoor	mm	250 x 1,000 x 730	250 x 1,400 x 730	250 x 1,400 x 730
Net weight	Indoor	kg	30	39	39
Air volume (H/M/L)	Cooling : Heating	L/s	350 / 317 / 250 : 350 / 317 / 250	534 / 434 / 350 : 534 / 434 / 350	534 / 434 / 350 : 534 / 434 / 350
External static pressure		Pa	30 (10 - 150)	40 (10 - 150)	40 (10 - 150)
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	30 / 26 / 23 : 30 / 26 / 23	33 / 29 / 25 : 33 / 29 / 25	33 / 29 / 25 : 33 / 29 / 25
Sound power level (H/M/L)	Cooling : Heating	dB	53 / 49 / 46 : 53 / 49 / 46	56 / 52 / 48 : 56 / 52 / 48	56 / 52 / 48 : 56 / 52 / 48
Number of fan speeds			5	5	5
Drain piping		mm	VP-20	VP-20	VP-20
Outdoor Unit					
Power source		Phase/Hz V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	3 Phase / 50Hz 400V 415V
Current (rated)	Cooling : Heating	A	8.60 : 8.60 8.25 : 8.35	10.8 : 12.7 10.3 : 12.2	3.60 : 4.30 3.50 : 4.15
Dimensions	H x W x D	mm	996 x 940 x 340	1,416 x 940 x 340	1,416 x 940 x 340
Net weight		kg	66	99	99
Air volume	Cooling : Heating	L/s	1,018 : 1,002	1,970 : 1,803	1,970 : 1,803
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 50 (48)	52 (50) : 52 (50)	52 (50) : 52 (50)
Sound power level (Silent mode)	Cooling : Heating	dB	64 (62) : 66 (64)	68 (66) : 68 (66)	68 (66) : 68 (66)
Piping connections	Liquid / Gas	mm	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88	Ø9.52 / Ø15.88
Pipe length range	min. - max.	m	5 - 50	5 - 85	5 - 85
Elevation difference (OU located lower, OU located higher)		m	15, 30	15, 30	15, 30
Maximum chargeless length		m	30	30	30
Refrigerant at shipping / Additional gas amount		g	R32 1,950 / 45 (g/m)	R32 3,050 / 45 (g/m)	R32 3,050 / 45 (g/m)
Operation ranges	Cooling : Heating	°C	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24	-15 to 48 : -20 to 24

Specifications of R32 Compact Model

Capacity			3.4kW	4.6kW	5.7kW	6.8kW
Model Name	Indoor Unit		S-3650PF3E	S-3650PF3E	S-6071PF3E	S-6071PF3E
	Outdoor Unit		U-36PZ3R5	U-50PZ3R5	U-60PZ3R5	U-71PZ3R5
Cooling capacity : Heating capacity	kW		3.4 (1.3 - 4.0) 3.6 (1.3 - 4.6)	4.6 (1.5 - 5.3) 5.0 (1.5 - 5.9)	5.7 (2.0 - 6.3) 5.7 (1.8 - 7.0)	6.8 (2.6 - 7.7) 6.8 (2.1 - 8.1)
		BTU/h	11,600 (4,400 - 13,600) 12,300 (4,400 - 15,700)	15,700 (5,100 - 18,100) 17,100 (5,100 - 20,100)	19,400 (6,800 - 21,500) 19,400 (6,100 - 23,900)	23,200 (8,900 - 26,300) 23,200 (7,200 - 27,600)
EER : COP	W/W		3.78 : 4.29	3.19 : 3.62	3.54 : 4.04	3.18 : 4.00
COP@H2 condition	W/W		3.09	3.33	3.09	2.84
Total power input	Cooling : Heating kW		0.900 : 0.840	1.44 : 1.38	1.61 : 1.41	2.14 : 1.70
		Residential	Hot Climate Average Climate	5.11 : 5.05 4.36 : 4.57	4.67 : 5.09 4.23 : 4.31	5.19 : 5.76 4.67 : 4.83
TCSPF : HSPF	Commercial	Cold Climate	4.36 : 4.06	4.29 : 3.79	4.82 : 4.13	4.34 : 3.82
		Hot Climate	5.77 : 5.01	5.22 : 5.13	5.69 : 5.77	5.01 : 5.33
		Average Climate	5.84 : 4.72	5.96 : 4.69	6.00 : 5.23	5.53 : 4.86
		Cold Climate	6.41 : 4.31	6.69 : 4.19	6.54 : 4.60	6.11 : 4.27
Indoor Unit						
Power source		Phase/Hz V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V
Dimensions H x W x D	Indoor	mm	250 x 800 x 730	250 x 800 x 730	250 x 1,000 x 730	250 x 1,000 x 730
Net weight	Indoor	kg	25	25	30	30
Air volume (H/M/L)	Cooling : Heating	L/s	233 / 217 / 167 : 233 / 217 / 167	267 / 250 / 200 : 267 / 250 / 200	350 / 317 / 250 : 350 / 317 / 250	350 / 317 / 250 : 350 / 317 / 250
External static pressure		Pa	30 (10 - 150)	30 (10 - 150)	30 (10 - 150)	30 (10 - 150)
Sound pressure level (H/M/L)	Cooling : Heating	dB(A)	30 / 27 / 22 : 30 / 27 / 22	34 / 30 / 25 : 34 / 30 / 25	30 / 26 / 23 : 30 / 26 / 23	30 / 26 / 23 : 30 / 26 / 23
Sound power level (H/M/L)	Cooling : Heating	dB	53 / 50 / 45 : 53 / 50 / 45	57 / 53 / 48 : 57 / 53 / 48	53 / 49 / 46 : 53 / 49 / 46	53 / 49 / 46 : 53 / 49 / 46
Number of fan speeds			5	5	5	5
Drain piping		mm	VP-20	VP-20	VP-20	VP-20
Outdoor Unit						
Power source		Phase/Hz V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V	1 Phase / 50Hz 230V 240V
Current (rated)	Cooling : Heating	A	4.00 : 3.80 3.85 : 3.55	6.40 : 6.20 6.10 : 5.95	7.15 : 6.25 6.85 : 6.00	9.50 : 7.55 9.10 : 7.25
Dimensions	H x W x D	mm	619 x 824 x 299	619 x 824 x 299	695 x 875 x 320	695 x 875 x 320
Net weight		kg	31	35	43	50
Air volume	Cooling : Heating	L/s	561 : 567	546 : 532	701 : 701	746 : 766
Sound pressure level (Silent mode)	Cooling : Heating	dB(A)	48 (46) : 49 (47)	48 (46) : 49 (47)	48 (46) : 49 (47)	49 (47) : 49 (47)
Sound power level (Silent mode)	Cooling : Heating	dB	66 (64) : 67 (65)	66 (64) : 67 (65)	66 (64) : 67 (65)	67 (65) : 67 (65)
Piping connections	Liquid / Gas	mm	Ø6.35 / Ø12.7	Ø6.35 / Ø12.7	Ø6.35 / Ø12.7*	Ø6.35 / Ø15.88**
Pipe length range	min. - max.	m	3 - 20	3 - 30	3 - 40	3 - 40
Elevation difference (OU located lower, OU located higher)		m	15, 15	15, 15	15, 30	15, 30
Maximum chargeless length		m	7.5	10	30	30
Refrigerant at shipping / Additional gas amount		g	R32 870 / 10 (g/m)	R32 1,140 / 15 (g/m)	R32 1,130 / 15 (g/m)	R32 1,320 / 17 (g/m)
Operating range	Cooling : Heating	°C	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24	-10 to 46 : -15 to 24

13.4kW		
S-1014PF3E	S-1014PF3E	S-1014PF3E
U-125PZH3R8	U-140PZH3R5	U-140PZH3R8
12.1 (3.2 - 13.6) 13.5 (3.2 - 15.4)	13.4 (3.3 - 15.3) 15.5 (3.3 - 17.4)	13.4 (3.3 - 15.3) 15.5 (3.3 - 17.4)
41,300 (10,900 - 46,400) 46,100 (10,900 - 52,500)	45,700 (11,300 - 52,200) 52,900 (11,300 - 59,400)	45,700 (11,300 - 52,200) 52,900 (11,300 - 59,400)
3.58 : 3.46	3.38 : 3.44	3.38 : 3.44
2.60	2.68	2.68
3.38 : 3.90	3.96 : 4.51	3.96 : 4.51
5.37 : 5.32	4.98 : 4.97	4.98 : 4.97
4.86 : 4.32	4.55 : 4.15	4.55 : 4.15
5.03 : 3.79	4.72 : 3.65	4.72 : 3.65
5.95 : 5.44	5.49 : 5.05	5.49 : 5.05
6.30 : 4.87	5.74 : 4.58	5.74 : 4.58
6.88 : 4.31	6.25 : 4.08	6.25 : 4.08
1 Phase / 50Hz 230V 240V 250 X 1,400 X 730 39 567 / 484 / 384 : 567 / 484 / 384 50 (10 - 150) 35 / 31 / 27 : 35 / 31 / 27 58 / 54 / 50 : 58 / 54 / 50 5 VP-20	1 Phase / 50Hz 230V 240V 250 X 1,400 X 730 39 601 / 534 / 417 : 601 / 534 / 417 50 (10 - 150) 39 / 35 / 29 : 39 / 35 / 29 62 / 58 / 52 : 62 / 58 / 52 5 VP-20	1 Phase / 50Hz 230V 240V 250 X 1,400 X 730 39 601 / 534 / 417 : 601 / 534 / 417 50 (10 - 150) 39 / 35 / 29 : 39 / 35 / 29 62 / 58 / 52 : 62 / 58 / 52 5 VP-20
3 Phase / 50Hz 400V 415V 5.30 : 6.10 5.15 : 5.90 1,416 x 940 x 340 99 2,087 : 1,870 53 (51) : 53 (51) 69 (67) : 69 (67) Ø9.52 / Ø15.88 5 - 85 15, 30 30 R32 3,050 / 45 (g/m) -15 to 48 : -20 to 24	1 Phase / 50Hz 230V 240V 18.7 : 21.1 17.9 : 20.2 1,416 x 940 x 340 99 2,154 : 1,937 54 (52) : 54 (52) 70 (68) : 70 (68) Ø9.52 / Ø15.88 5 - 85 15, 30 30 R32 3,050 / 45 (g/m) -15 to 48 : -20 to 24	3 Phase / 50Hz 400V 415V 6.30 : 7.15 6.05 : 6.90 1,416 x 940 x 340 99 2,154 : 1,937 54 (52) : 54 (52) 70 (68) : 70 (68) Ø9.52 / Ø15.88 5 - 85 15, 30 30 R32 3,050 / 45 (g/m) -15 to 48 : -20 to 24

Notes:

- In the case of standard installation (Horizontal installation in the ceiling, rear side air intake)
- In the case of noce X OFF
- In case it is necessary to indicate the air flow volume in (l/s), the value in (m³/min.) shall be multiplied by 16.7 and rounded down the decimal point.
- AEER and ACOP classification is at 230V(400V) only in accordance with GEMS2019.
- TCSPF, HSPF and Total Energy consumption indicate the value of average temperature zone.
- Indoor and outdoor sound levels are determined in an anechoic chamber and may differ once the unit is installed due to ambient conditions
- H : High at setting 5 stage (Level 5), M : Middle at setting 5 stage (Level 3), L : Low at setting 5 stage (Level 1) Noise of L is indicated by the values at FAN mode.

*1 For piping connection for 6.0kW unit, connect the gas socket tube (Ø12.7-Ø15.88) to the gas tubing side indoor unit and connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

*2 For piping connection for 7.1kW unit, connect the liquid socket tube (Ø6.35-Ø9.52) to the liquid tubing side indoor unit.

9.5kW		12.1kW		13.4kW	
S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E
U-100PZ3R5	U-100PZ3R8	U-125PZ3R5	U-125PZ3R8	U-140PZ3R5	U-140PZ3R8
9.5 (3.0 - 11.4) 9.5 (3.0 - 13.5)	9.5 (3.0 - 11.4) 9.5 (3.0 - 13.5)	12.1 (3.2 - 13.5) 12.1 (3.3 - 15.0)	12.1 (3.2 - 13.5) 12.1 (3.3 - 15.0)	13.4 (3.3 - 15.0) 13.4 (3.4 - 16.0)	13.4 (3.3 - 15.0) 13.4 (3.4 - 16.0)
32,400 (10,200 - 38,900) 32,400 (10,200 - 46,100)	32,400 (10,200 - 38,900) 32,400 (10,200 - 46,100)	41,300 (10,900 - 46,100) 41,300 (11,300 - 51,200)	41,300 (10,900 - 46,100) 41,300 (11,300 - 51,200)	45,700 (11,300 - 51,200) 45,700 (11,600 - 54,600)	45,700 (11,300 - 51,200) 45,700 (11,600 - 54,600)
3.57 : 4.09	3.57 : 4.09	3.40 : 3.56	3.40 : 3.56	3.16 : 3.76	3.16 : 3.76
2.88	2.88	2.82	2.82	2.73	2.73
2.66 : 2.32	2.66 : 2.32	3.56 : 3.40	3.56 : 3.40	4.24 : 3.56	4.24 : 3.56
5.24 : 5.04	5.24 : 5.04	4.90 : 5.01	4.90 : 5.01	4.75 : 4.93	4.75 : 4.93
4.52 : 4.52	4.52 : 4.52	4.42 : 4.21	4.42 : 4.21	4.33 : 4.18	4.33 : 4.18
4.62 : 4.06	4.62 : 4.06	4.52 : 3.68	4.52 : 3.68	4.47 : 3.63	4.47 : 3.63
5.87 : 4.99	5.87 : 4.99	5.40 : 5.06	5.40 : 5.06	5.26 : 5.01	5.26 : 5.01
5.91 : 4.68	5.91 : 4.68	5.81 : 4.60	5.81 : 4.60	5.78 : 4.59	5.78 : 4.59
6.49 : 4.31	6.49 : 4.31	6.36 : 4.10	6.36 : 4.10	6.40 : 4.05	6.40 : 4.05
1 Phase / 50Hz 230V 240V 250 x 1,400 x 730 39 534 / 434 / 350 : 534 / 434 / 350 40 (10 - 150) 33 / 29 / 25 : 33 / 29 / 25 56 / 52 / 48 : 56 / 52 / 48 5 VP-20	1 Phase / 50Hz 230V 240V 250 x 1,400 x 730 39 534 / 434 / 350 : 534 / 434 / 350 40 (10 - 150) 33 / 29 / 25 : 33 / 29 / 25 56 / 52 / 48 : 56 / 52 / 48 5 VP-20	1 Phase / 50Hz 230V 240V 250 x 1,400 x 730 39 567 / 484 / 384 : 567 / 484 / 384 50 (10 - 150) 35 / 31 / 27 : 35 / 31 / 27 58 / 54 / 50 : 58 / 54 / 50 5 VP-20	1 Phase / 50Hz 230V 240V 250 x 1,400 x 730 39 567 / 484 / 384 : 567 / 484 / 384 50 (10 - 150) 35 / 31 / 27 : 35 / 31 / 27 58 / 54 / 50 : 58 / 54 / 50 5 VP-20	1 Phase / 50Hz 230V 240V 250 x 1,400 x 730 39 601 / 534 / 417 : 601 / 534 / 417 50 (10 - 150) 39 / 35 / 29 : 39 / 35 / 29 62 / 58 / 52 : 62 / 58 / 52 5 VP-20	1 Phase / 50Hz 230V 240V 250 x 1,400 x 730 39 601 / 534 / 417 : 601 / 534 / 417 50 (10 - 150) 39 / 35 / 29 : 39 / 35 / 29 62 / 58 / 52 : 62 / 58 / 52 5 VP-20
1 Phase / 50Hz 230V 240V 12.7 : 11.1 12.2 : 10.6 996 x 980 x 370 83 1,219 : 1,219 52 (50) : 52 (50) 70 (68) : 70 (68) Ø9.52 / Ø15.88 5 - 50 15, 30 30 R32 2,400 / 45 (g/m) -10 to 46 : -15 to 24	3 Phase / 50Hz 400V 415V 4.20 : 3.70 4.05 : 3.55 996 x 980 x 370 83 1,219 : 1,219 52 (50) : 52 (50) 70 (68) : 70 (68) Ø9.52 / Ø15.88 5 - 50 15, 30 30 R32 2,400 / 45 (g/m) -10 to 46 : -15 to 24	1 Phase / 50Hz 230V 240V 16.5 : 15.7 15.8 : 15.1 996 x 980 x 370 87 1,369 : 1,336 55 (53) : 55 (53) 73 (71) : 73 (71) Ø9.52 / Ø15.88 5 - 50 15, 30 30 R32 2,800 / 45 (g/m) -10 to 46 : -15 to 24	3 Phase / 50Hz 400V 415V 5.45 : 5.20 5.25 : 5.05 996 x 980 x 370 87 1,369 : 1,336 55 (53) : 55 (53) 73 (71) : 73 (71) Ø9.52 / Ø15.88 5 - 50 15, 30 30 R32 2,800 / 45 (g/m) -10 to 46 : -15 to 24	1 Phase / 50Hz 230V 240V 19.6 : 16.5 18.8 : 15.8 996 x 980 x 370 87 1,402 : 1,369 56 (54) : 56 (54) 74 (72) : 74 (72) Ø9.52 / Ø15.88 5 - 50 15, 30 30 R32 2,800 / 45 (g/m) -10 to 46 : -15 to 24	3 Phase / 50Hz 400V 415V 6.50 : 5.45 6.30 : 5.25 996 x 980 x 370 87 1,402 : 1,369 56 (54) : 56 (54) 74 (72) : 74 (72) Ø9.52 / Ø15.88 5 - 50 15, 30 30 R32 2,800 / 45 (g/m) -10 to 46 : -15 to 24

Multi-Split Air Conditioning System

Panasonic's multi-split conditioning systems are designed to provide more space saving installation for outdoor units. A neater alternative to preserve the exterior appearance of buildings such as condominiums, single and multi-storey residences.



Compact and lightweight design to fit every building type

- The multi-split system offers greater installation versatility and space-saving choices for condominium with limited free space.




WALL-MOUNTED – AERO Z SERIES



Wireless Remote Controller Included
CZ-R0517C Wired Remote Controller (Optional)

Model No	CS-Z20KKRW	CS-Z25KKRW-1	CS-Z35KKRW	CS-Z42KKRW
Capacity	2.0kW	2.5kW	3.5kW	4.2kW**
Model No	CS-Z50KKRW	CS-Z50KKRW-1	CS-Z60KKRW-1	CS-Z71KKRW
Capacity	5.0kW**	5.0kW**	6.0kW**	7.1kW***

MINI CASSETTE WITH nanoe™ X



Panel CZ-XP14
CZ-RW03 + CZ-RW03 Wireless Remote Controller (Optional)
CZ-RT03B Wired Remote Controller (Optional)
CZ-RT04 Wired Remote Controller (Optional)
CZ-SENSE1 ECONAVI Sensor Ready (Optional)
CZ-RT08LJ / CZ-RT08LW CONEX Wired Remote Controller (Optional)
CZ-RT08LJ / CZ-RT08LW CONEX Wired Remote Controller (Optional)
CZ-CAWPE1 Network Adaptor* (Optional)

Model No	S-25PY3E	S-36PY3E	S-50PY3E	S-60PY3E
Capacity	2.5kW**	3.5kW**	5.0kW**	6.0kW**

WALL-MOUNTED – DEVELOPER RZ SERIES



Wireless Remote Controller Included
CZ-R0517C Wired Remote Controller (Optional)
CZ-1N051 Network Adaptor* (Optional)

Model No	CS-MR216WKR	CS-MR220WKR	CS-RZ25KRW	CS-RZ35KRW
Capacity	1.6kW	2.0kW	2.5kW	3.5kW
Model No	CS-RZ42KRW	CS-RZ50KRW	CS-RZ60KRW	CS-RZ71KRW
Capacity	4.2kW**	5.0kW**	6.0kW**	7.1kW***

PREMIER SERIES FLOOR CONSOLE



Wireless Remote Controller Included
CZ-1N051 Network Adaptor* (Optional)
CZ-R0517C Wired Remote Controller (Optional)

Model No	CS-Z25UFRW	CS-Z35UFRW	CS-Z50UFRW
Capacity	2.5kW	3.5kW	5.0kW**

ULTRA SLIM DUCTED




Wired Remote Controller Included
CZ-1N051 Network Adaptor* (Optional)

Model No	CS-Z25UD3RAW	CS-Z35UD3RAW	CS-Z50UD3RAW	CS-Z60UD3RAW
Capacity	2.5kW	3.5kW	5.0kW**	6.0kW**

Advantages Of Multi-Split Air Conditioning System


Space Saving

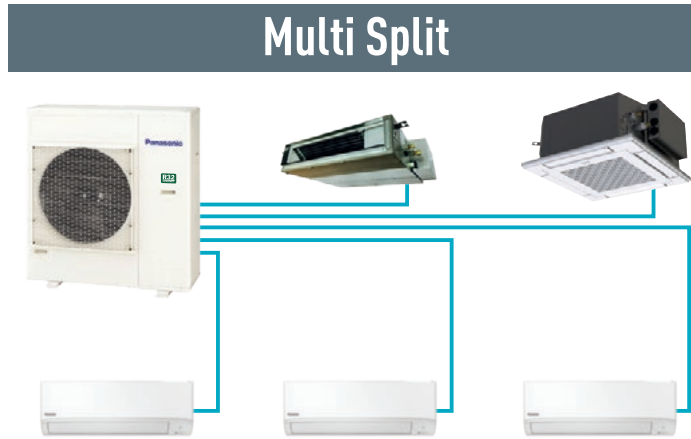

Space-saving installation with less outdoor units required

- As 1 outdoor unit is able to connect up to 5 indoor units, this provide flexible customization according to the layout of your house.


Independent Operation Control

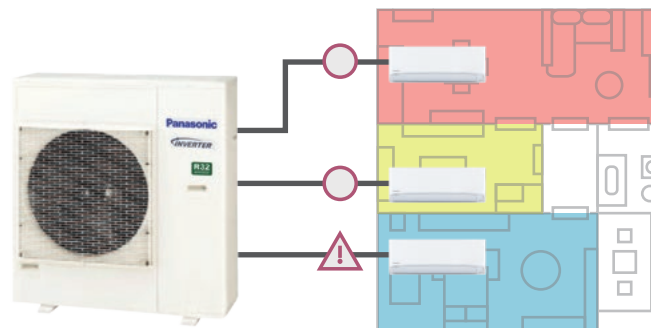

Outdoor unit connects to each indoor unit independently

- Able to adjust the operation settings for each indoor unit separately. If one indoor unit is malfunctions, other indoor units can continue to operate by provide cooling comfort to the rooms.

Flexible Installation

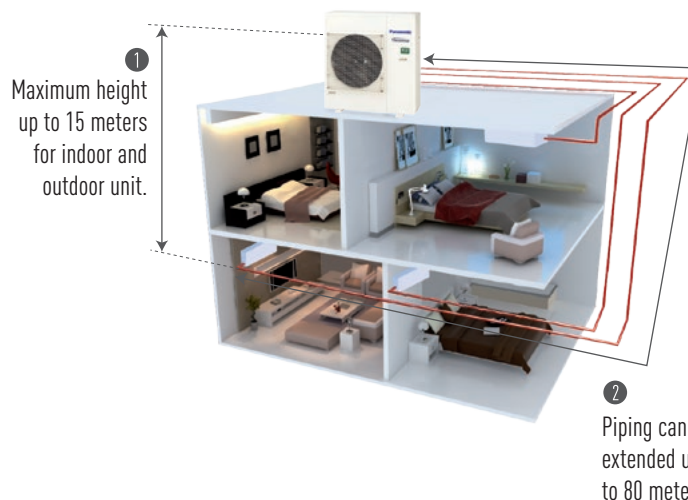

The multi-split system accommodates long pipelines up to 80 meters

- Flexible arrangement and installation of indoor and outdoor units based on the room condition, location and installation convenience of the site.

* Applicable to CU-52100VBR

Product Line-Up

MODEL	Indoor Units Combination Range	Refrigerant Pipe Diameter			Pipe Extension					Indoor Unit Combinations					
		Indoor Unit	Liquid Side (mm)	Gas Side (mm)	Maximum Pipe Length (1 room)	Maximum Pipe Length (Total)	Maximum Chargeless Length	Additional Gas	Maximum Height	Type Capacity [kW class]	Wall-Mounted	Cassette	Ultra Slim Ducted	Floor Console	
<p>CU-2Z52VBR</p> <p>INDOOR UNITS: Possible Combination Patterns Must be within capacity range</p> <p>5.2kW *4</p> <p>Dimensions (HxWxD): 619 x 824(+70) x 299 mm Weight: 39 kg</p> <p>* At least two indoor units must be connected.</p>	3.2 to 7.7 kW	Room A	ø 6.35	ø 9.52	20 m	30 m	20 m	15 g/m	10 m	1.6	●				
		Make sure to keep combinations within this range.	Room B	ø 6.35	ø 9.52						2.5	●	●	●	●
											3.5	●	●	●	●
											4.2	●			
											5.0	●	●	●	●
<p>CU-3Z54VBR</p> <p>INDOOR UNITS: Possible Combination Patterns Must be within capacity range</p> <p>5.4kW *4</p> <p>Dimensions (HxWxD): 795 x 875(+95) x 320 mm Weight: 71 kg</p> <p>* At least two indoor units must be connected.</p>	4.5 to 9.5 kW	Room A	ø 6.35	ø 9.52	25 m	50 m	30 m	20 g/m	15 m	1.6	●				
		Make sure to keep combinations within this range.	Room B	ø 6.35	ø 9.52						2.5	●	●	●	●
											3.5	●	●	●	●
											4.2	●			
											5.0	●	●	●	●
<p>CU-4Z71VBR</p> <p>INDOOR UNITS: Possible Combination Patterns Must be within capacity range</p> <p>7.1kW *4</p> <p>Dimensions (HxWxD): 795 x 875(+95) x 320 mm Weight: 72 kg</p> <p>* At least two indoor units must be connected.</p>	4.5 to 11.5 kW	Room A	ø 6.35	ø 9.52	25 m	60 m	30 m	20 g/m	15 m	1.6	●				
		Make sure to keep combinations within this range.	Room B	ø 6.35	ø 9.52						2.5	●	●	●	●
											3.5	●	●	●	●
											4.2	●			
											5.0	●	●	●	●

*4 To enable demand response management, an optional accessory needs to be installed (CZ-CAP2)

OUTDOOR UNIT



Up to 2 rooms



CU-2Z52VBR

Up to 3 rooms





CU-3Z54VBR

Up to 4 rooms



CU-4Z71VBR

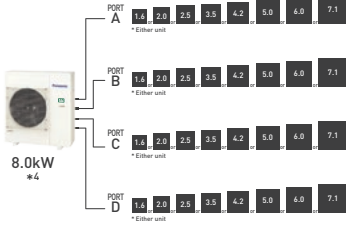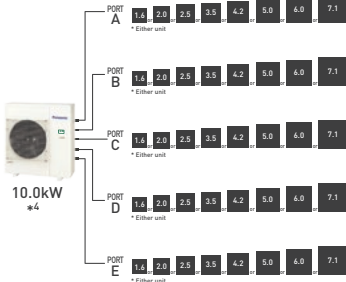MODEL	Indoor Units Combination Range	Refrigerant Pipe Diameter			Pipe Extension					Indoor Unit Combinations				
		Indoor Unit	Liquid Side (mm)	Gas Side (mm)	Maximum Pipe Length (1 room)	Maximum Pipe Length (Total)	Maximum Chargeless Length	Additional Gas	Maximum Height	Type Capacity [kW class]	Wall- Mounted	Cassette	Ultra Slim Ducted	Floor Console
CU-4Z80VBR INDOOR UNITS: Possible Combination Patterns Must be within capacity range  8.0kW *4 Dimensions (HxWxD): 999 x 940 x 340 mm Weight: 80 kg At least two indoor units must be connected.	4.5 to 14.7 kW Make sure to keep combinations within this range.	Room A	ø 6.35	ø 9.52	25 m	70 m	45 m	20 g/m	15 m	1.6	●			
		Room B	ø 6.35	ø 9.52						2.0	●			
		Room C	ø 6.35	ø 9.52						2.5	●	●	●	●
										3.5	●	●	●	●
		Room D	ø 6.35	ø 9.52						4.2	●			
										5.0	●	●	●	●
										6.0	●	●	●	
		7.1	●											
CU-5Z100VBR INDOOR UNITS: Possible Combination Patterns Must be within capacity range  10.0kW *4 Dimensions (HxWxD): 999 x 940 x 340 mm Weight: 81 kg At least two indoor units must be connected.	4.5 to 18.3 kW Make sure to keep combinations within this range.	Room A	ø 6.35	ø 9.52	25 m	80 m	45 m	20 g/m	15 m	1.6	●			
		Room B	ø 6.35	ø 9.52						2.0	●			
		Room C	ø 6.35	ø 9.52						2.5	●	●	●	●
										3.5	●	●	●	●
		Room D	ø 6.35	ø 9.52						4.2	●			
										5.0	●	●	●	●
										6.0	●	●	●	
		7.1	●											

*4 To enable demand response management, an optional accessory needs to be installed [CZ-CAP2]

ACCESSORIES



CZ-MA1PA

*1 CZ-MA1PA is to be used to reduce the connection size on the indoor unit from 1/2" to 3/8".




CZ-MA2PA

*2 CZ-MA2PA is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".



CZ-MA3PA

*3 CZ-MA3PA is to be used to reduce the connection size on the indoor unit from 5/8" to 1/2".



CZ-CAP2

*4 Demand response module CZ-CAP2.

OUTDOOR UNIT



Up to 4 rooms



CU-4Z80VBR

Up to 5 rooms



CU-5Z100VBR

Product Line-Up

INDOOR UNIT

MODEL			WALL-MOUNTED (AERO Z SERIES)							
			CS-Z20XKRW	CS-Z25XKRW-1	CS-Z35XKRW	CS-Z42XKRW	CS-Z50XKRW	CS-Z50XKRW-1	CS-Z60XKRW-1	CS-Z71XKRW
Capacity	kW		2.0	2.5	3.5	4.2	5.0	5.0	6.0	7.1
Power Source			Single Phase 240V, 50Hz							
Sound Pressure Level (H/L/Q-Lo)	Cooling	dB(A)	40/26/21	42/27/21	46/28/21	46/33/30	46/36/30	49/36/33	50/38/35	51/39/36
	Heating		41/27/23	42/29/23	46/31/24	46/34/30	46/36/30*	49/35/31	50/37/34	51/39/36
Sound Power Level (H/L/Q-Lo)	Cooling	dB(A)	56/42/37	58/43/37	62/44/37	62/49/46	62/52/46	65/52/49	66/54/51	67/55/52
	Heating		57/43/39	58/45/39	62/47/40	62/50/46	62/52/46*	65/51/47	66/53/50	67/55/52
Airflow	Cooling/Heating	L/s	178/195	188/200	193/202	193/202	208/228	328/328	337/358	352/367
Dimensions	Height	mm	290	290	290	290	290	295	295	295
	Width	mm	779	779	779	779	779	1,040	1,040	1,040
	Depth	mm	209	209	209	209	209	244	244	244
Net Weight	kg		8	8	8	8	8	12	13	13
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	mm	ø 9.52	ø 9.52	ø 9.52	ø 9.52 ¹	ø 9.52 ¹	ø 9.52 ¹	ø 12.70 ²	ø 12.70 ^{2,3}

*For connection to CU-2Z52VBR, indoor Sound Pressure Level (Heating) is 46/35/31 and Sound Power Level (Heating) is 62/51/47.

MODEL			WALL-MOUNTED (DEVELOPER RZ SERIES)							
			CS-MRZ16WKR	CS-MRZ20WKR	CS-RZ25XKRW	CS-RZ35XKRW	CS-RZ42XKRW	CS-RZ50XKRW	CS-RZ60XKRW	CS-RZ71XKRW
Capacity	kW		1.6	2.0	2.5	3.5	4.2	5.0	6.0	7.1
Power Source			Single Phase 240V, 50Hz							
Sound Pressure Level (H/L/Q-Lo)	Cooling	dB(A)	41/27/24	42/27/24	42/27/21	46/28/21	46/33/30	46/36/30	49/38/35	51/39/36
	Heating		41/29/26	42/29/26	42/29/23	46/31/24	46/34/30	46/36/30*	50/38/35	51/39/36
Sound Power Level (H/L/Q-Lo)	Cooling	dB(A)	57/43/40	58/43/40	58/43/37	62/44/37	62/49/46	62/52/46	65/54/51	67/55/52
	Heating		57/45/42	58/45/42	58/45/39	62/47/40	62/50/46	62/52/46*	66/54/51	67/55/52
Airflow	Cooling/Heating	L/s	183/193	188/198	188/200	193/202	193/202	208/228	328/338	352/367
Dimensions	Height	mm	290	290	290	290	290	290	295	295
	Width	mm	779	779	779	779	779	779	1,040	1,040
	Depth	mm	209	209	209	209	209	209	244	244
Net Weight	kg		8	8	8	8	8	8	12	13
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	mm	ø 9.52	ø 9.52	ø 9.52	ø 9.52	ø 9.52 ¹	ø 9.52 ¹	ø 12.70 ²	ø 12.70 ^{2,3}

*For connection to CU-2Z52VBR, indoor Sound Pressure Level (Heating) is 46/35/31 and Sound Power Level (Heating) is 62/51/47.

MODEL			MINI CASSETTE WITH nanoe™ X			
			S-25PY3E	S-36PY3E	S-50PY3E	S-60PY3E
Capacity	kW		2.5	3.5	5.0	6.0
Power Source			Single Phase 240V, 50Hz			
Sound Pressure Level (H/L)	Cooling	dB(A)	33/27	36/27	41/29	45/33
	Heating		33/27	36/27	41/29	45/33
Sound Power Level (H)	Cooling	dB(A)	48	51	56	60
	Heating		48	51	56	60
Airflow	Cooling/Heating	L/s	142/142	158/158	200/200	233/233
Dimensions	Height	mm	243	243	243	243
	Width	mm	575	575	575	575
	Depth	mm	575	575	575	575
Net Weight	kg		15	15	15	15
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	mm	ø 9.52 ¹	ø 9.52 ¹	ø 9.52 ¹	ø 12.70 ²

*1 CZ-MA1PA is to be used to reduce the connection size on the indoor unit from 1/2" to 3/8".

*2 CZ-MA2PA is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".

*3 CZ-MA3PA is to be used to reduce the connection size on the indoor unit from 5/8" to 1/2".

INDOOR UNIT

MODEL			ULTRA SLIM DUCTED				FLOOR CONSOLE		
			CS-Z25UD3RAW	CS-Z35UD3RAW	CS-Z50UD3RAW	CS-Z60UD3RAW	CS-Z25UFRAW	CS-Z35UFRAW	CS-Z50UFRAW
Capacity	kW		2.5	3.5	5.0	6.0	2.5	3.5	5.0
Power Source			Single Phase 240V, 50Hz						
Sound Pressure Level (H/L)	Cooling	dB(A)	35/29	35/28	41/31	43/32	40/27	41/28	46/33
	Heating		36/29	37/29	41/32	43/34	40/27	41/27	48/35
Sound Power Level (H)	Cooling	dB(A)	51	51	57	59	56	57	62
	Heating		52	53	57	59	56	57	64
Airflow	Cooling/Heating	L/s	175/175	187/187	255/255	262/262	163/173	170/182	198/227
Dimensions	Height	mm	200	200	200	200	600	600	600
	Width	mm	750	750	750	750	750	750	750
	Depth	mm	640	640	640	640	207	207	207
Net Weight		kg	19	19	19	19	13	13	13
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	mm	ø 9.52	ø 9.52	ø 9.52 ¹	ø 12.70 ²	ø 9.52	ø 9.52	ø 9.52 ¹

OUTDOOR UNIT

MODEL			(50Hz)	CU-Z252VBR	CU-3Z54VBR	CU-4Z71VBR	CU-4Z80VBR	CU-5Z100VBR
Power Source				Single Phase 240V, 50Hz				
Cooling Operation	Capacity (min-max)	kW	5.20 (1.50-6.00)	5.40 (1.80-7.30)	7.10 (1.90-8.80)	8.00 (2.30-9.20)	10.00 (2.30-11.50)	
Maximum Connectable Capacity		kW	7.7	9.5	11.5	14.7	18.3	
Maximum Connectable Indoors		Units	2	3	4	4	5	
Electrical Data	Running Current	A	5.9	5.1	7.4	8.9	11.8	
	Power Input (min-max)	kW	1.35 (0.25-1.62)	1.12 (0.36-2.18)	1.66 (0.34-2.47)	1.98 (0.42-2.87)	2.60 (0.43-3.59)	
	AEER/EER	W/W	3.79 / 3.85	4.74 / 4.82	4.23 / 4.28	4.00 / 4.04	3.81 / 3.85	
Noise (H)	Sound Pressure Level	dB(A)	51	48	49	51	53	
	Sound Power Level	dB(A)	66	62	63	67	69	
Heating Operation	Capacity	kW	6.10 (1.10-7.20)	7.00 (1.60-9.00)	8.50 (3.00-10.70)	9.40 (3.00-11.60)	12.00 (3.40-14.50)	
Electrical Data	Running Current	A	6.2	6.8	8.6	9.3	12.1	
	Power Input (min-max)	kW	1.43 (0.21-1.90)	1.54 (0.32-2.63)	1.95 (0.50-2.72)	2.03 (0.50-3.42)	2.76 (0.58-4.02)	
	ACOP/COP	W/W	4.21 / 4.27	4.49 / 4.55	4.32 / 4.36	4.58 / 4.63	4.31 / 4.35	
Noise (H)	Sound Pressure Level	dB(A)	53	49	51	52	56	
	Sound Power Level	dB(A)	68	63	65	68	72	
Maximum Current		A	11.5	15.2	15.6	19.0	21.3	
Starting Current		A	6.4	7.0	8.8	9.7	12.5	
Compressor Output		W	900	1300	1300	1700	1700	
Dimensions	Height	mm	619	795	795	999	999	
	Width	mm	824 (+70)	875 (+95)	875 (+95)	940	940	
	Depth	mm	299	320	320	340	340	
Net Weight		kg	39	71	72	80	81	
Power Supply			Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	
Pipe Length Range (1 room)		m	3-20	3-25	3-25	3-25	3-25	
Maximum Pipe Length (Total) **		m	30	50	60	70	80	
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35	
	Gas Side	mm	ø 9.52	ø 9.52	ø 9.52	ø 9.52	ø 9.52	
Operating Range	Cooling	(°C)	-10~+46	-10~+46	-10~+46	-10~+46	-10~+46	
	Heating	(°C)	-15~+24**	-15~+24**	-15~+24**	-15~+24**	-15~+24**	

** Additional Gas might be required for some models. Refer to Page 32 for information on Additional Gas.

Rating Conditions


	Cooling	Heating
Inside air temperature	27°C DB /19°C WB	20°C DB
Outside air temperature	35°C DB	7°C DB /6°C WB

2-PIPE Mini-VRF LZ Series

High External Static Pressure
35Pa

High external static pressure 35Pa

When unit is installed on a narrow balcony and exposed to the sun, the fence at the front side would restrict hot air from being discharged. Heat accumulated in an enclosure can cause over-heating. This could potentially result in damage or shorten the product's life span. A high external static pressure sends the air further away from the outdoor unit and through the fence. This provides better air circulation and distribution.

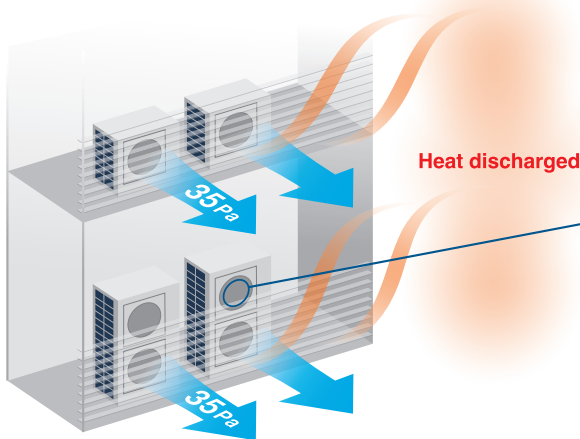

LZ series - High pressure

But with a high pressure of 35Pa, hot air is sent further away preventing overheating inside the outdoor unit enclosure.

LZ series fan

The new LZ Series fan has ribs extending near the blade tips, in a structure that resists deformation. During high electrostatic pressure, this blade shape suppresses disruptions in the airflow, and a high air pressure of 35 Pa discharges the hot air a sufficient distance.



Compact design

Also, since Mini VRF LZ Series is a single unit, it is possible to install the unit in more various places compared to the Single Split system.



Single Split




Mini-FSV



In addition to raising efficiency, we have made the outdoor unit more compact. It can now be installed in places that were previously too small.



Can be installed in the small space

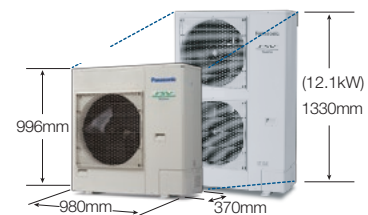

Long piping design length for greater design flexibility

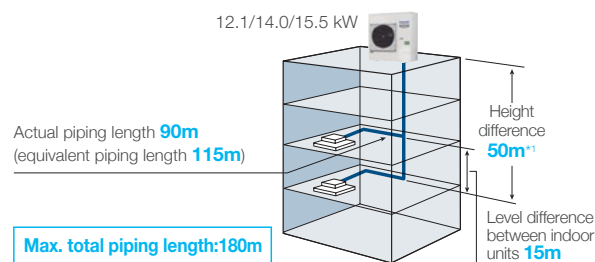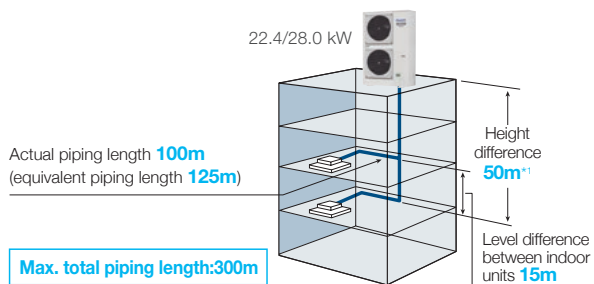


LZ2


*1: 40m if the outdoor unit is below the indoor unit.

Blue fin condenser

The anti-corrosion Blue Fin treatment of the heat exchanger provides greater resistance against corrosion. All models are equipped with Blue Fin condenser.

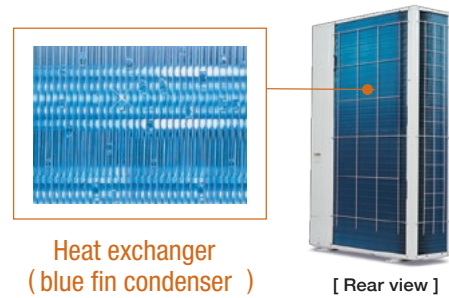


Energy savings design

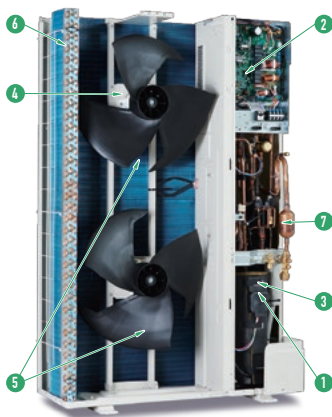

- 1 Panasonic Inverter Compressor** A large-capacity inverter compressor has been adopted. The inverter compressor is superior in performance with improved partial-load capacity.
- 2 Printed Circuit Board** The number of PCB is 2 pieces for making maintenance easier.
- 3 Accumulator** A large accumulator has been adopted to maintain compressor reliability because of the increased refrigerant quantity, which allows an extended max piping length.
- 4 DC Fan Motor** Checking load and outside temperature, the DC motor is controlled for optimum air volume.
- 5 Newly Designed Fan** The newly designed fan blades have been developed to inhibit air turbulence and to increase efficiency. As fan diameter has been increased its size, the air volume has been increased whilst maintaining a same sound level.
- 6 Heat Exchanger & Copper Tubes** The heat exchanger size and the copper tube sizes in the heat exchanger have been redesigned to increase efficiency.
- 7 Oil Separator** A centrifugal separator has been adopted to improve oil separation efficiency and reduce refrigerant pressure loss.

Wide operating range

- Cooling operation is possible even when outdoor temperature is as low as -10°C DB.
- Cooling operation is possible even when outdoor temperature is as high as 52°C DB. (LZ2 series)
- Heating operation is possible even when outdoor temperature is as low as -20°C WB.

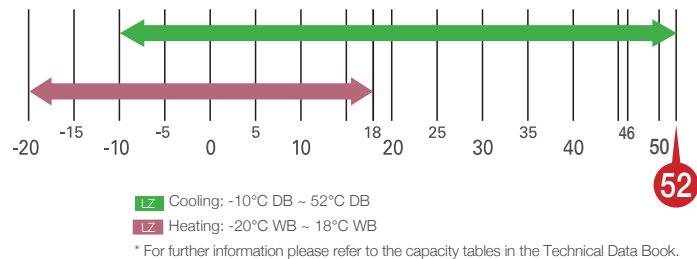

The remote controller temperature can be set from 18°C up to 30°C (Cooling), 16°C up to 30°C (Heating)*1.

*1 Depending on the type of remote controller.

Quiet operation mode


- Quiet operation mode reduces outdoor unit operating sound down to 7dB than rating.
 - 3-step set point is available.
 - External input signal is also available.
- * Timer setting of quiet operation mode is available in High-spec Remote Controller (CZ-RTC5B/CZ-RTC6 series).



Wide range of connectable indoor units

An expansion from Panasonic VRF line up, the Mini-VRF is compatible with the same indoor units and controls as the rest of the VRF range.

Connecting image



2-PIPE Mini-VRF LZ2 Series

kW		22.4		25.0			
Model name		U-8LZ2E8		U-10LZ2E8			
Power supply		400/415V/3-phase/50Hz					
Voltage		400V	415V	400V	415V		
Capacity	Cooling	kW	22.4	28.0			
		BTU/h	76,500	95,600			
	Heating	kW	25.0	28.0			
		BTU/h	85,300	95,600			
EER/COP	Cooling	W/W	3.84	3.47			
	Heating	W/W	4.30	4.47			
Dimensions (H/W/D)		mm			1,500 x 980 x 370		
Net weight		kg			125		
Electrical ratings	Cooling	Running current	A	9.25	8.91	12.5	12.1
		Power input	kW	5.83		8.07	
	Heating	Running current	A	9.32	8.98	9.93	9.57
		Power input	kW	5.81		6.26	
Starting current		A			1		
Air flow rate	m ³ /h		9,480		10,020		
	L/s		2,633		2,783		
Refrigerant amount at shipment		kg			R32 4.9	R32 5.1	
Piping connection	Gas pipe	mm (inches)		Ø19.05 (Ø3/4)	Ø22.22 (Ø7/8)		
	Liquid pipe	mm (inches)		Ø9.52 (Ø3/8)	Ø9.52 (Ø3/8)		
Ambient temperature operating range		Cooling: -10°CDB~+52°CDB, Heating: -20°CWB~+18°CWB			Cooling: -10°CDB~+52°CDB, Heating: -20°CWB~+18°CWB		
Sound pressure level (Cooling)	Normal mode	dB(A)		59.0			
	Silent mode(1/2/3/4)	dB(A)		56.0/54.0/52.0/50.0			
Sound power level (Cooling)	Normal mode	dB		72.0			



Global remarks	Rated conditions:		Cooling	Heating
	Indoor air temperature	27°C DB / 19°C WB	20°C DB	
	Outdoor air temperature	35°C DB	7°C DB / 6°C WB	

* These specifications are subject to change without notice.

** High durable model (with suffix "E") has same specifications.

Dimensions




U-8LZ2E8 / U-10LZ2E8

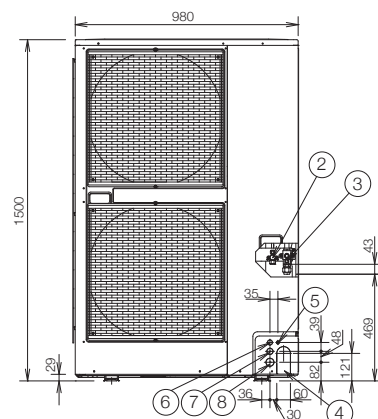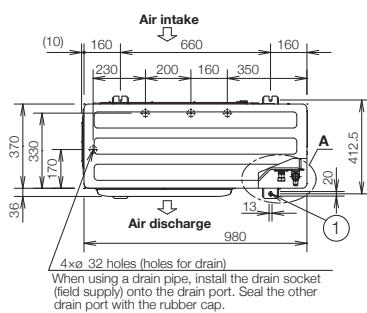

①	Mounting hole (4-R6.5), anchor bolt : M10
②	Refrigerant tubing (liquid tube), flared connection (ø9.52)
③	Refrigerant tubing (gas tube), flared connection (ø19.05)
④	Refrigerant tubing port
⑤	Electrical wiring port (ø13)
⑥	Electrical wiring port (ø22)
⑦	Electrical wiring port (ø27)
⑧	Electrical wiring port (ø35)

For U-10LZ2E8

The tubing of the gas main has a diameter of ø22.22, but the connection to the service valve of the outdoor unit has a diameter of ø19.05, so a flare has to be used. Consequently, be sure to use the enclosed joint tube B and joint tube A in making connections (brazing).

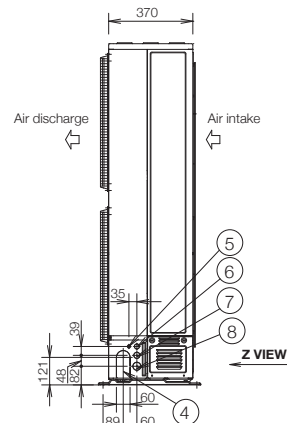



















Unit: mm

Mini VRF Indoor Units

Class	22	28	36	45	56	60	73	90
Capacity	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating
Type	2.2/2.5 7,500/8,500	2.8/3.2 9,600/11,000	3.6/4.2 12,000/14,000	4.5/5.0 15,000/17,000	5.6/6.3 19,000/21,000	6.0/7.1 20,400/24,200	7.3/8.0 25,000/27,000	9.0/10.0 30,000/34,000
• nanoex Generator Mark2 F3 type ECONAVI Mid Static Adaptive Ducted R410A								
• nanoex Generator Mark2 F3 type ECONAVI Mid Static Adaptive Ducted R32	NEW 	NEW 	NEW 	NEW 	NEW 	NEW 	NEW 	NEW 
M1 type ECONAVI Slim Low Static Ducted R410A/R32								
Z1 type ECONAVI Slim & Narrow Ducted R410A								
E2 type High Static Ducted / Energy Saving High- Fresh Air Ducted R410A								
E1 type High Static Ducted R410A								
K2 type ECONAVI Wall Mounted R410A/R32								
• nanoex Generator Mark2 U2 type ECONAVI ** 4-Way Cassette Panel No. CZ-KPU3H/CZ-KPU3A R410A/R32								
• nanoex Generator Mark3 Y3 type ECONAVI 4-Way Mini Cassette Panel No. CZ-KPY4 R410A/R32	NEW 	NEW 	NEW 	NEW 	NEW 			
L1 type 2-Way Cassette Panel No. CZ-02KPL2 Panel No. CZ-03KPL2 (Only for S-73ML1E5) R410A								
D1 type 1-Way Cassette Panel No. CZ-KPD2 R410A								
T2 type ECONAVI Under Ceiling R410A								
• nanoex Generator Mark4 G1 type Floor Console R410A								
P1 type Floor Standing R410A								
R1 type Concealed Floor Standing R410A								

* High fresh air system is not allowed for 18 kW model. ** Only for CZ-KPU3A

106	112	140	160	180	224	280	Functions
Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	Cooling/Heating	
10.6/11.4 36,000/39,000	11.2/12.5 38,200/42,700	14.0/16.0 47,800/54,600	16.0/18.0 54,600/61,500	18.0/20.0 61,400/68,200	22.4/25.0 76,400/85,300	28.0/31.5 95,500/107,500	
 S-106MF3E5A		 S-140MF3E5A	 S-160MF3E5A				self-diagnosing, Auto fan, Dry mode, Auto restart, Drain pump, DC motor
NEW  S-106MF3E5B		NEW  S-140MF3E5B	NEW  S-160MF3E5B				self-diagnosing, Auto fan, Dry mode, Auto restart, Drain pump, DC motor
							self-diagnosing, Auto fan, Dry mode, Auto restart, Drain pump, DC motor
							self-diagnosing, Auto fan, Dry mode, Auto restart, DC motor
				 S-180ME2E5 *	High Fresh Air  S-224ME2E5	High Fresh Air  S-280ME2E5	self-diagnosing, Auto fan, Dry mode, Auto restart, DC motor
	 S-112ME1R5A	 S-140ME1R5A	 S-160ME1R5A				self-diagnosing, Auto fan, Dry mode, Auto restart
 S-106MK2E5B							self-diagnosing, Auto fan, Dry mode, Auto flap, Auto restart, Air Swing
 S-106MU2E5B		 S-140MU2E5B	 S-160MU2E5B				self-diagnosing, Auto fan, Dry mode, Auto flap, Auto restart, Air swing, Drain pump, DC motor
							self-diagnosing, Auto fan, Dry mode, Auto flap, Auto restart, Air swing, Drain pump, DC motor
							self-diagnosing, Auto fan, Dry mode, Auto flap, Auto restart, Air swing, Drain pump, DC motor
 S-106MT2E5A		 S-140MT2E5A					self-diagnosing, Auto fan, Dry mode, Auto flap, DC motor, Auto restart, Air swing
							self-diagnosing, Auto fan, Dry mode, Auto flap, Auto restart, Air swing, DC motor
							self-diagnosing, Auto fan, Dry mode, Auto restart
							self-diagnosing, Auto fan, Dry mode, Auto restart

 Self-diagnosing function
  Automatic fan operation
  DRY Dry mode
  AUTO Auto flap control
  Automatic restart function for power failure
  Air swing
  DP Built-in drain pump
  DC motor



Authorised Dealer

Panasonic

AIR CONDITIONING

panasonicaircon.co.nz

Panasonic New Zealand Limited 18 Sir Woolf Fisher Drive, Highbrook, East Tamaki, Auckland 2013, New Zealand
Phone: 09 272 0100, Fax: 09 272 0134