


# Panasonic<sup>®</sup>

## Product Specification Sheet

### IP Video Intercom System – Door Station

---

Model No. **VL-VC3535BX**

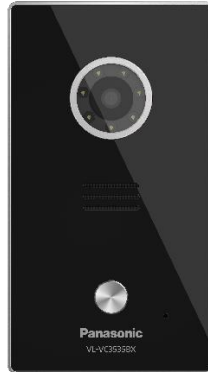

#### 1. Basic information

- Dimension: Approx. 168mm x 93mm x 32mm
- Color: Black
- External material: AL + Tempered glass
- Operation: Mechanical Keys
- Installation: Flush mount

#### 2. Features

- Video intercom: Built-in 2M pixel camera with microphone,
- Easy binding steps: Show or scan QR code from Mobile Apps to the Door Station
- E-lock unlocking function: Supports remote unlock from Mobile App or Room Monitors
- Leave message: Visitors can leave voice message
- Surveillance: Door Station video live-stream viewable on Room Monitors & Mobile Apps
- Device Removal Alarm: When device is removed, alarm will be sounded, and alert will be sent
- Connectable to external device: Electric Lock

### 3. Specifications

<b>System Parameters</b>	
Operation system	Linux
Flash	16MB
RAM	64MB
<b>Display Parameters</b>	
Size	—
Operation Method	Mechanical Keys
Resolution	—
<b>Video Parameters</b>	
Video Compression	H.264
Video Pixel	VGA, 720P
Camera Pixel	2.0M pixels CMOS sensor 1/2.7-inch CMOS sensor 3.7mm EFL
Minimum Illuminance Required	0.01lx (within approx. 50cm from the camera lens)
Camera Quantity	Single Camera
HDR	-
Viewing Angle	78°(H) / 58°(V)
Lighting Method	White coloured LED lights
<b>Audio Parameters</b>	
Audio Compression	G.711
Speaker	8Ω / 0.5W
Microphone	-54 ± 2dB
<b>Face Recognition</b>	
Face Capacity	—
<b>IC Card</b>	
Card Capacity	—
Frequency	—
<b>Network Parameters</b>	
Wiring	UTP (Cat 5e or higher)
Protocol	IPv4; TCP/IP; ICMP; UDP; RTSP; HTTP; DNS; RTP; RTMP; ARP; NTP
<b>Device Interfaces</b>	
Network Interface	RJ45, 10BASE-T/100BASE-TX (Auto MDI/MDI-X)
Power Out Port	—
RS485	Reserved
Relay Output	1
Fire Detect Port	—
Lock Release	1
Door Status Port	1
Wiegand Port	—

General	
Power Source	PoE Splitter or Power supply unit (Sold separately)
Operating Voltage	12 to 27VDC
Current Rating	DC 12V, 500mA; DC 27V, 220mA
Power Consumption	Standby: 3.0W, Operating: 6.0W
Installation Method	Flush mount
Colour	Black
Dimensions (H x W x D) (Excluding protruding sections)	Approx. 168mm x 93mm x 32mm
Operating Temperature	-20°C to +55°C
Storage Temperature	-40°C to +70°C
Operating Humidity	Up to 90% (non-condensing)
IP rating (Ingress Protection)	IP54
IK rating (Impact Protection)	IK04
Talking Method	Hands-free
Display Language	—
Motion Detect	—
External Material	AL + Tempered glass
Weight	Without package: 350g With package: 560g

**Copyright © 2024 Panasonic. All rights reserved.**

- Actual products may vary slightly from photographs.
- Specifications & features are subject to change without notice.

---

**DISTRIBUTED BY:**

**Panasonic®**