

THE BEST COFFEE IN THE CITY

- COFFEE -

ESPRESSO (SHORT BLACK) 4.95

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

DOUBLE ESPRESSO (DOPPIO) 4.95

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

SHORT MACCHIATO 4.95

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

LONG MACCHIATO 4.95

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

RISTRETTO 4.95

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

LONG BLACK (AMERICANO) 4.95

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

CAFE LATTE 4.95

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

CAPPUCCINO 4.95

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

- REAL TEA -

BLACK TEA 4.95

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

EARL GRAY 4.95

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

GREEN TEA 4.95

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

- SANDWICHES -

EGG SALAD 4.95

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

THE DAGWOOD 4.95

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

THE CAPRESE 4.95

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

CLAM ROLL 4.95

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

EXCLUSIVE

Letraset sheets containing Lorem Ipsum passages, and more recently with desktop publishing software like Aldus PageMaker including versions of Lorem Ipsum.

SR Series 24/7 Digital Signage with RS232 Controls

Distributed by

Panasonic

SR Series | 24/7 Digital Signage With RS232 Control



Application

Running on an Android SoC, easily present advertising, interactive information and focused content utilising the 24/7 long life panels via landscape or portrait orientation and control via RS232.

Ideal for **shopping malls, retail, catering, art exhibitions, rail transit and other industries.**

Key Features


- RS232 Control
- UHD Resolution
- 700 nits
- 7 × 24 Operation
- Android 9.0 with Custom UI & Extensive Engineer Menu
- ARM Quad Core Cortex-A53 SoC
- HDMI Input
- 6mm Super Slim Even Bezel Design
- Landscape & Portrait Installation Support
- VESA Mounting Interface

Specifications


Model	SR43AA	SR49AA	SR55AA	SR65AA	SR75AA	SR86AA
Display						
Screen Size (Diagonal)	43"	49"	55"	65"	75"	86"
Native Resolution	3840 (H) x2160 (V)	3840 (H) x2160 (V)	3840 (H) x2160 (V)	3840 (H) x2160 (V)	3840 (H) x2160 (V)	3840 (H) x 2160 (V)
Aspect Ratio	16:9	16:9	16:9	16:9	16:9	16:9
Brightness	700 nit (Typ.)	700 nit (Typ.)	700 nit (Typ.)	700 nit (Typ.)	700 nit (Typ.)	700 nit (Typ.)
Contrast	>1200:1	>1200:1	>1200:1	>1200:1	>1200:1	>1200:1
View Angle	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)	178°(H) / 178°(V)
Display Color	16.7M	16.7M	16.7M	16.7M	16.7M	16.7M
Response Time	8ms	8ms	8ms	8ms	8ms	8ms
Operation Time (Hour/Day)	24/7	24/7	24/7	24/7	24/7	24/7
Life Time (Light Source)	50,000 Hrs (Typ.)	50,000 Hrs (Typ.)	50,000 Hrs (Typ.)	50,000 Hrs (Typ.)	50,000 Hrs (Typ.)	50,000 Hrs (Typ.)
Surface Treatment	25% Haze	25% Haze	25% Haze	25% Haze	25% Haze	25% Haze
Interface						
HDMI IN 2.0	×2 (HDMI1 ARC / HDMI 2)	×2 (HDMI1 ARC / HDMI 2)	×2 (HDMI1 ARC / HDMI 2)	×2 (HDMI1 ARC / HDMI 2)	×2 (HDMI1 ARC / HDMI 2)	×2 (HDMI1 ARC / HDMI 2)
AV IN	×1 [3.5mm Earphone]	×1 [3.5mm Earphone]	×1 [3.5mm Earphone]	×1 [3.5mm Earphone]	×1 [3.5mm Earphone]	×1 [3.5mm Earphone]
USB 2.0	×2	×2	×2	×2	×2	×2
AUDIO_OUT	500mVRMS(MAX) ×1	500mVRMS(MAX) ×1	500mVRMS(MAX) ×1	500mVRMS(MAX) ×1	500mVRMS(MAX) ×1	500mVRMS(MAX) ×1
RS232	×1	×1	×1	×1	×1	×1
RJ45	×1	×1	×1	×1	×1	×1
TF Card	×1	×1	×1	×1	×1	×1
Configuration						
CPU	A53*4, up to 1.5GHz	A53*4, up to 1.5GHz	A53*4, up to 1.5GHz	A53*4, up to 1.5GHz	A53*4, up to 1.5GHz	A53*4, up to 1.5GHz
GPU	Multi Core Mali G52	Multi Core Mali G52	Multi Core Mali G52	Multi Core Mali G52	Multi Core Mali G52	Multi Core Mali G52
RAM/Storage	2G/16G	2G/16G	2G/16G	2G/16G	2G/16G	2G/16G
O/S	Android 9.0	Android 9.0	Android 9.0	Android 9.0	Android 9.0	Android 9.0
LAN	10/100M	10/100M	10/100M	10/100M	10/100M	10/100M
WIFI	802.11b/g/n	802.11b/g/n	802.11b/g/n	802.11b/g/n	802.11b/g/n	802.11b/g/n
Bluetooth	4.2	4.2	4.2	4.2	4.2	4.2
Built-in Speaker	10W x 2(6Ω)	10W x 2(6Ω)	10W x 2(6Ω)	10W x 2(6Ω)	10W x 2(6Ω)	10W x 2(6Ω)
Power						
Power Supply	AC 100V ~ 240V@50/60HZ	AC 100V ~ 240V@50/60HZ	AC 100V ~ 240V@50/60HZ	AC 100V ~ 240V@50/60HZ	AC 100V ~ 240V@50/60HZ	AC 100V ~ 240V@50/60HZ
Power Consumption	157 W	163 W	165 W	190 W	247 W	350 W
Power Consumption (Standby)	0.5 W	0.5 W	0.6 W	0.6 W	0.6 W	0.6 W
Environment						
Operation Temperature	0°C~50°C	0°C~50°C	0°C~50°C	0°C~50°C	0°C~50°C	0°C~50°C
Operation Humidity	10%~85%	10%~85%	10%~85%	10%~85%	10%~85%	10%~85%
Storage Temperature	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C
Storage Humidity	5%~95%	5%~95%	5%~95%	5%~95%	5%~95%	5%~95%
Physical						
Color/Material	Black/Aluminum	Black/Aluminum	Black/Aluminum	Black/Aluminum	Black/Aluminum	Black/Aluminum
Bezel Width	6mm (L/R/T/B)	6mm (L/R/T/B)	6mm (L/R/T/B)	6mm (L/R/T/B)	6mm (L/R/T/B)	6mm (L/R/T/B)
Set Outline Dimension (W×H×D)	956×546×61.7mm	1088×619×61.7mm	1225×689×61.7mm	1444×820×61.7mm	1665×946×61.7mm	1908×1082×61.7mm
Package Dimension (W×H×D)	1115×209×700mm	1243×209×773mm	1379×209×853mm	1589×209×914mm	1819×209×1100mm	TBD
Set Weight	8.5Kg	9.8Kg	11.9Kg	15.9Kg	21Kg	33Kg
Package Weight (1 set inside)	15Kg	18Kg	21Kg	29Kg	35Kg	53Kg
VESA Mounting Interface	400 x 200	400 x300	400 x 300	400 x 400	400 x 400	400 x 400

SR Series - 24/7 Digital Signage with RS232 Control

SR43AA 43"

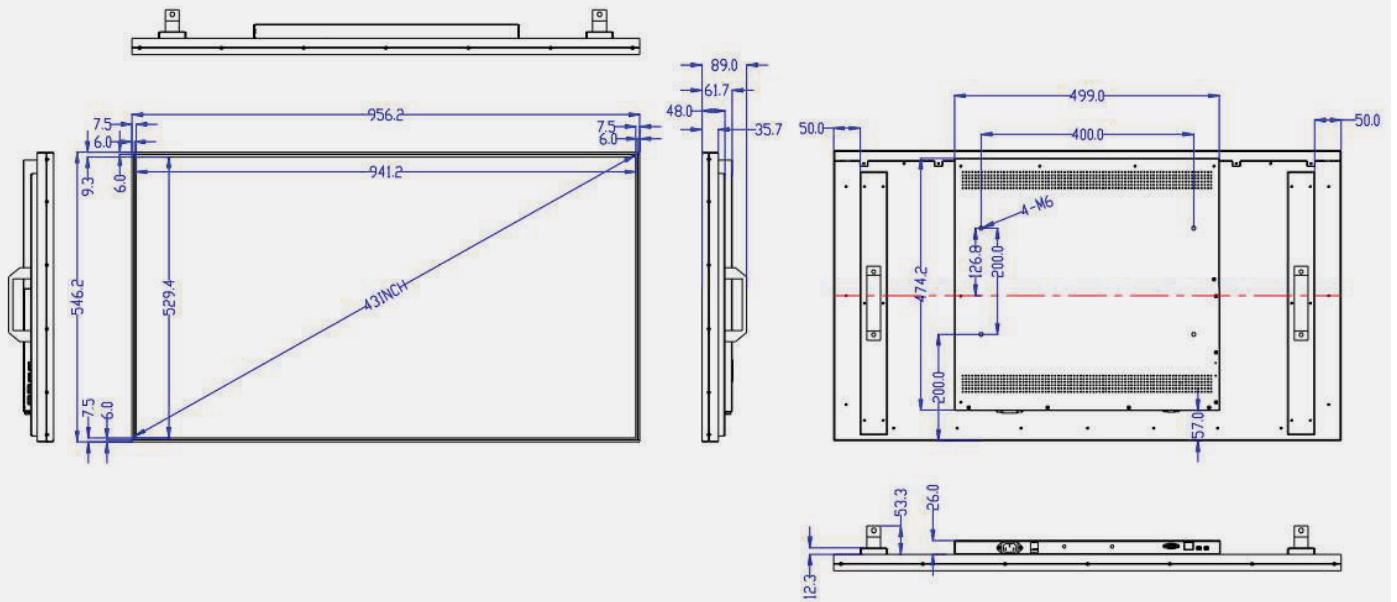


SR49AA 49"

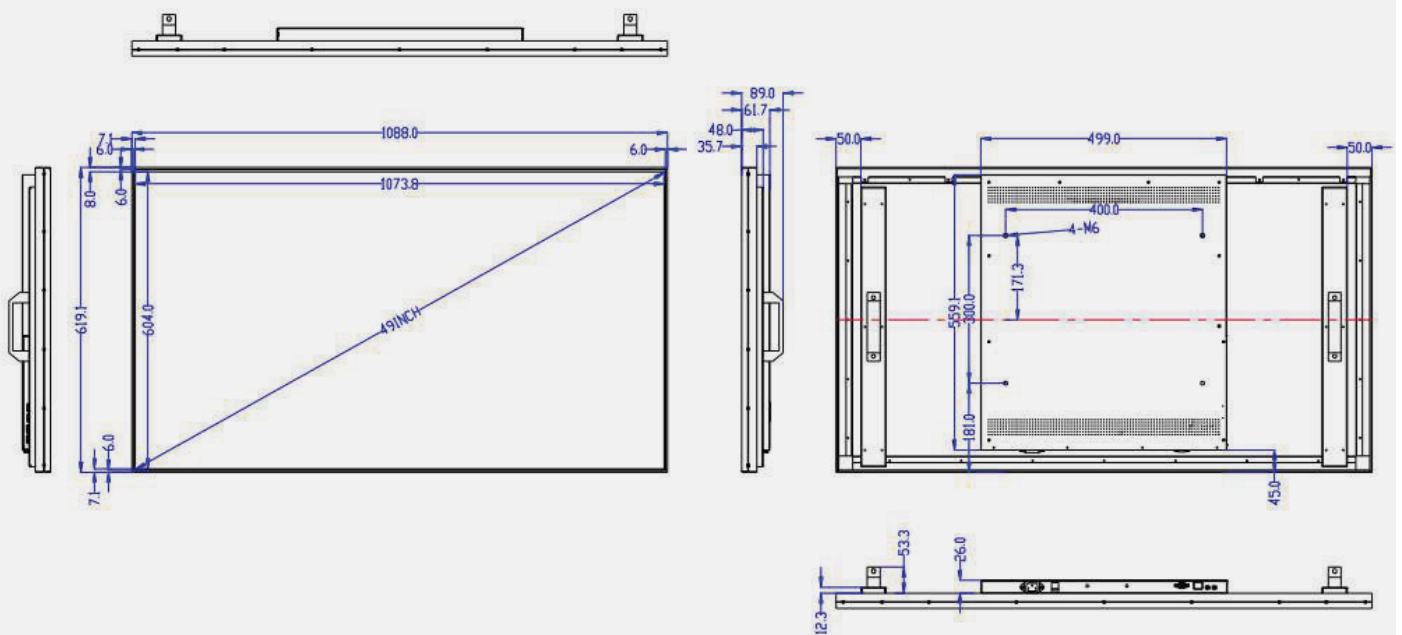


SR Series - 24/7 Digital Signage with RS232 Control

SR55AA 55"

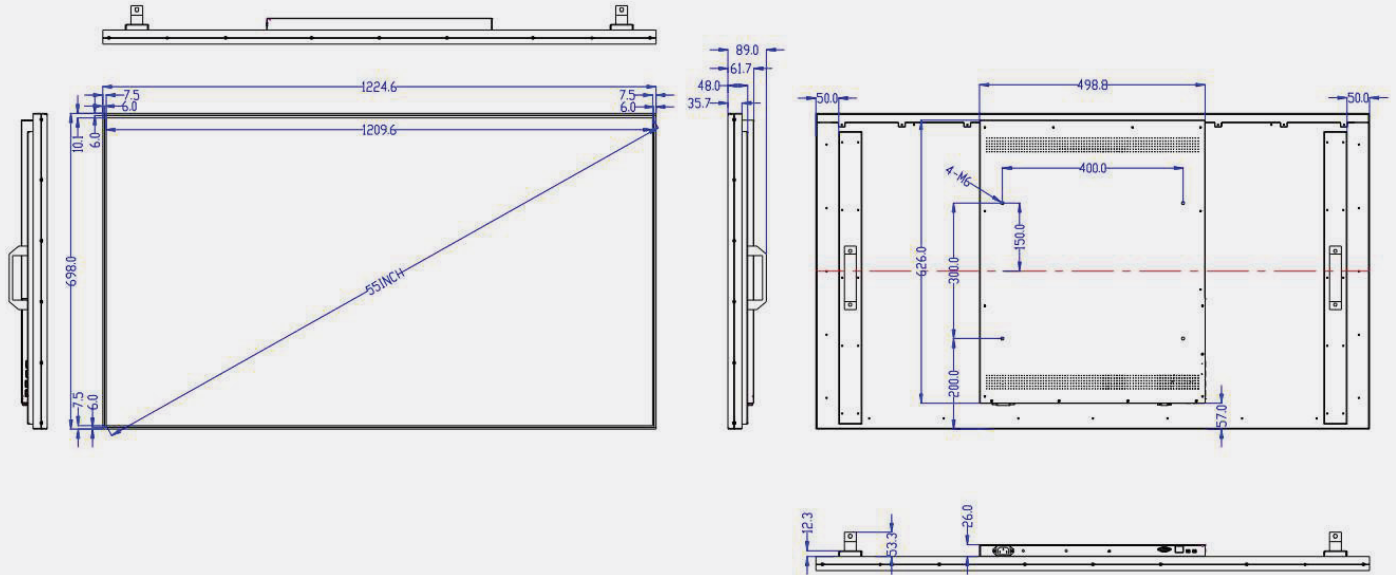


SR65AA 65"

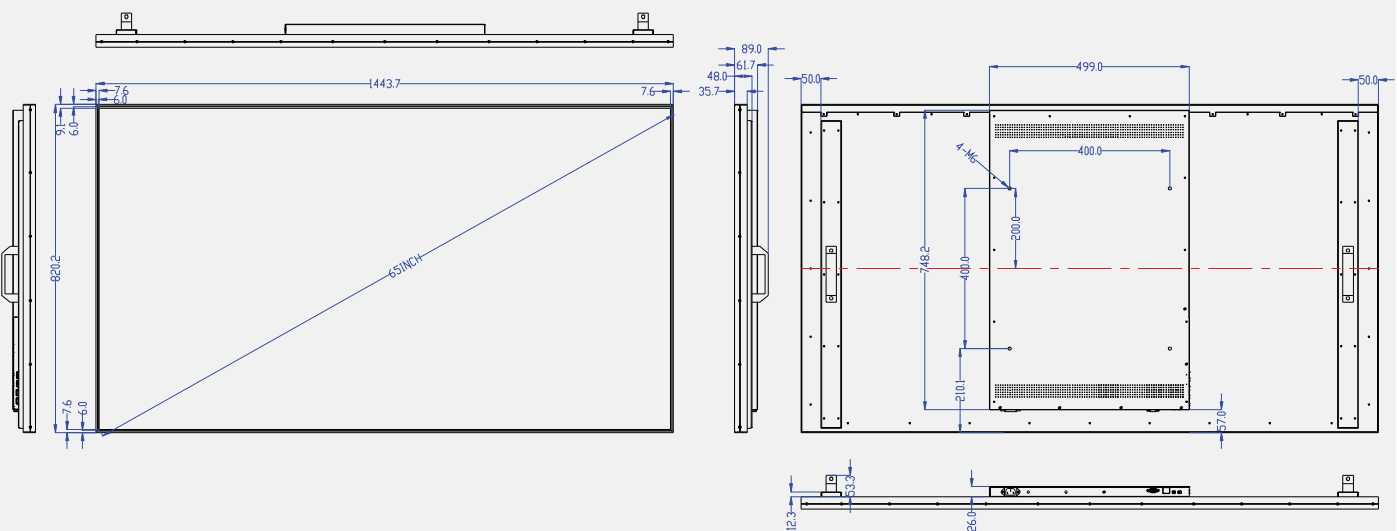


SR Series - 24/7 Digital Signage with RS232 Control

SR75AA 75"

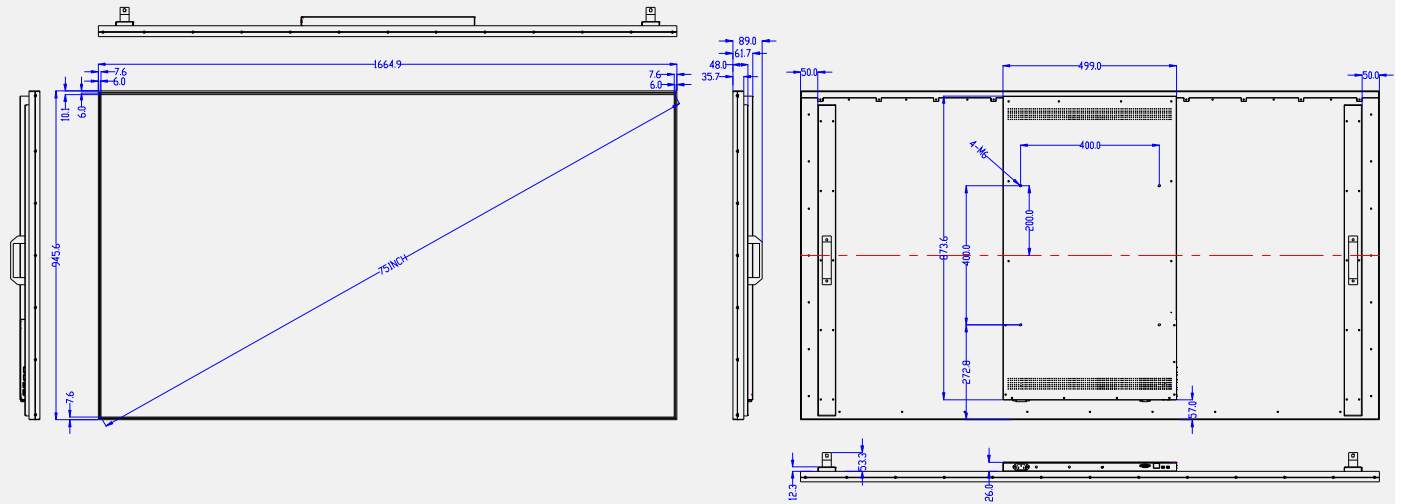

SR86AA 86"

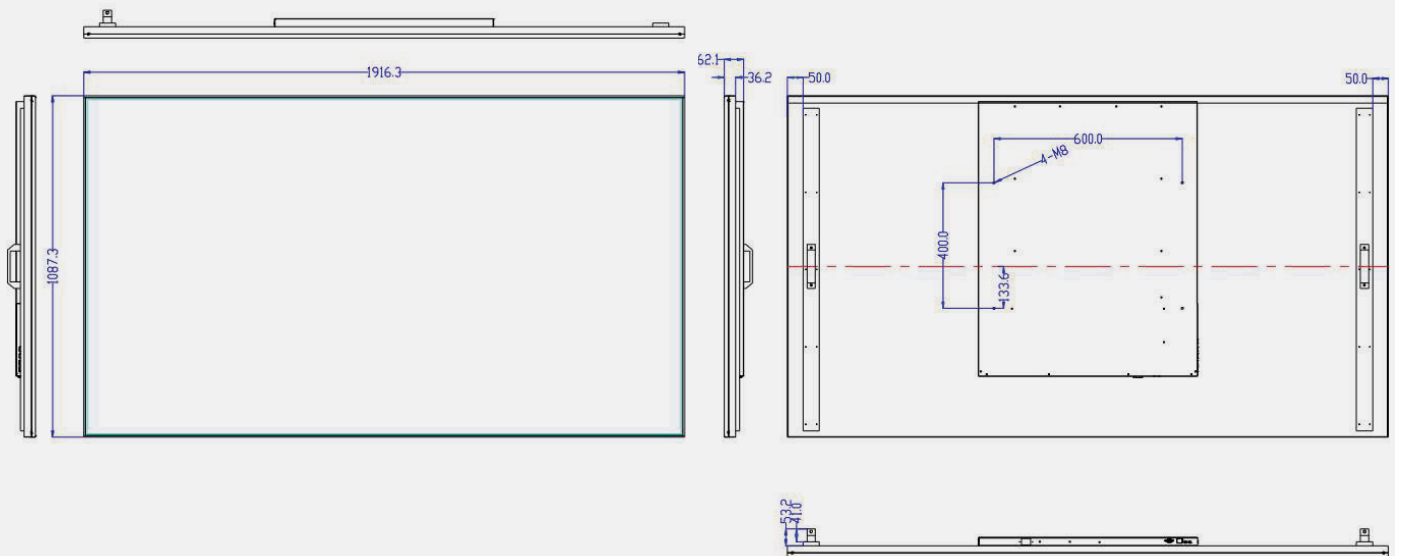

Please note: Design and specifications are subject to change without prior notice.