

FLOOR STANDING

- Stylish design & powerful air flow
- The control panel/remote controller have nanoe™ X displays
- Compact 34,100 Btu ODU (210 mm shorter/27 kg lighter than current model)

[S-21/24PB3H5
Accessory)



[S-21/24PB3H5
Control Panel)



[S-34/43/48PB3H5
Accessory)



[S-34/43/48PB3H5
Control Panel)



S-21PB3H5/
S-24PB3H5



S-34PB3H5/
S-43PB3H5/
S-48PB3H5



Capacity (Btu/h)		20,500	24,600	34,100	42,700	47,750
Power Source	V/Phase Hz	220/230V, 10 Phase - 50Hz				
Indoor		S-21PB3H5	S-24PB3H5	S-34PB3H5	S-43PB3H5	S-48PB3H5
Outdoor		U-21PRB1H5	U-24PRB1H5	U-34PSB3H5	U-43PSB3H5	U-48PSB3H5
Cooling Capacity: Rated (Min-Max)	kW	6.05 (1.00-6.60)	7.25 (1.00-7.50)	10.00 (1.20-10.30)	12.53 (2.00-13.50)	14.00 (2.00-14.60)
	Btu/h	20,500 (3,410-22,500)	24,600 (3,410-25,570)	34,100 (4,090-35,120)	42,700 (6,820-46,030)	47,750 (6,820-49,780)
Current: Rated (Max)	A	8.00 (11.2)	11.2 (13.7)	15.1 (16.9)	20.3 (26.9)	25.6 (28.1)
Cooling Power Input: Rated (Min-Max)	kW	1.80 (0.21-2.30)	2.55 (0.21-2.80)	3.45 (0.30-3.60)	4.47 (0.80-5.00)	5.60 (0.80-5.70)
	W/W	3.36	2.84	2.89	2.80	2.50
Cooling Rated COP/EER		11.3	9.64	9.88	9.55	8.52
	Btu/hW					
Indoor Unit						
Cooling Air Volume	m ³ /min	15.5	15.5	32.0	32.0	32.0
	cfm	547	547	1,130	1,130	1,130
Sound Pressure Level (Hi/Lo)	dB (A)	45 / 31	45 / 33	53 / 44	53 / 44	53 / 44
	dB	58 / 44	58 / 46	66 / 57	66 / 57	66 / 57
Dimension	Indoor (HxWxD) mm	1,680 x 500 x 318	1,680 x 500 x 318	1,880 x 600 x 357	1,880 x 600 x 357	1,880 x 600 x 357
	Net Weight Indoor kg	29	29.5	45.0	45.0	45.0
Outdoor						
Sound Pressure Level	dB (A)	53	54	54	55	56
Sound Power Level	dB	66	67	67	68	69
Dimension Outdoor (HxWxD)	mm	626 x 825 x 320	626 x 825 x 320	786 x 900 x 320	996 x 940 x 340	996 x 940 x 340
	Net Weight kg	35.0	36.0	45.0	74.0	74.0
Piping Connection	Gas Pipe mm (inch)	12.70 (1/2)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)
	Liquid Pipe mm (inch)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)	9.52 (3/8)	9.52 (3/8)
Pipe Length	Min-Max m	3 - 40	3 - 40	7.5 - 50	7.5 - 50	7.5 - 50
	Elevation Difference (Outdoor unit upper) m	20	20	20	30	30
Maximum Chargeless Length Max	m	15	15	20	20	20
Additional Gas	g/m	10	10	40	50	50
Operation Range, Outdoor	Min-Max °C	18-43	18-43	18-43	18-43	18-43

* Specifications are subject to change without notice. Please refer to technical documents for more details.



* The sound pressure level is measured in accordance with JIS C 9 612 and JIS B 8616.

Clean airflow direction control with remote controller


Easily swing the louvre at the touch of a button.



S-21/24PB3H5 Blow distance: Up to 7 m

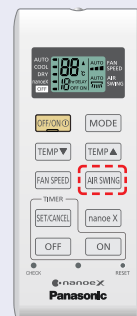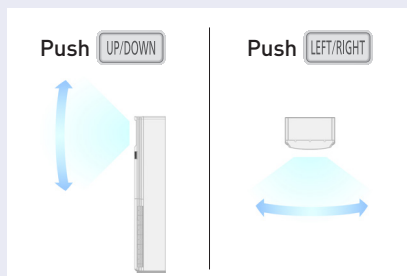

S-34/43/48PB3H5 Blow distance: Up to 11 m

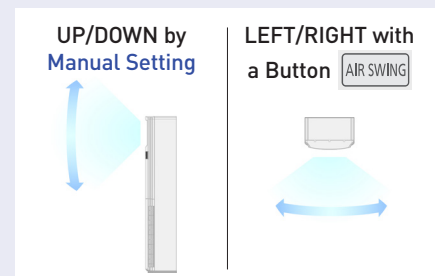

Other Functions

Random auto restart



During a power failure, when power is restored, it automatically restarts operating in the same mode as just before power was lost.

Auto fan mode

When the auto fan mode is set, the indoor unit of the air conditioner automatically is adjusted the suitable fan speed according to factors such as load.

12-hour On/Off delay setting timer

Pressing the timer button on the remote control lets you set operation start/stop time within 12 hours of the current time.



* The images above show the remote controller screen display.